

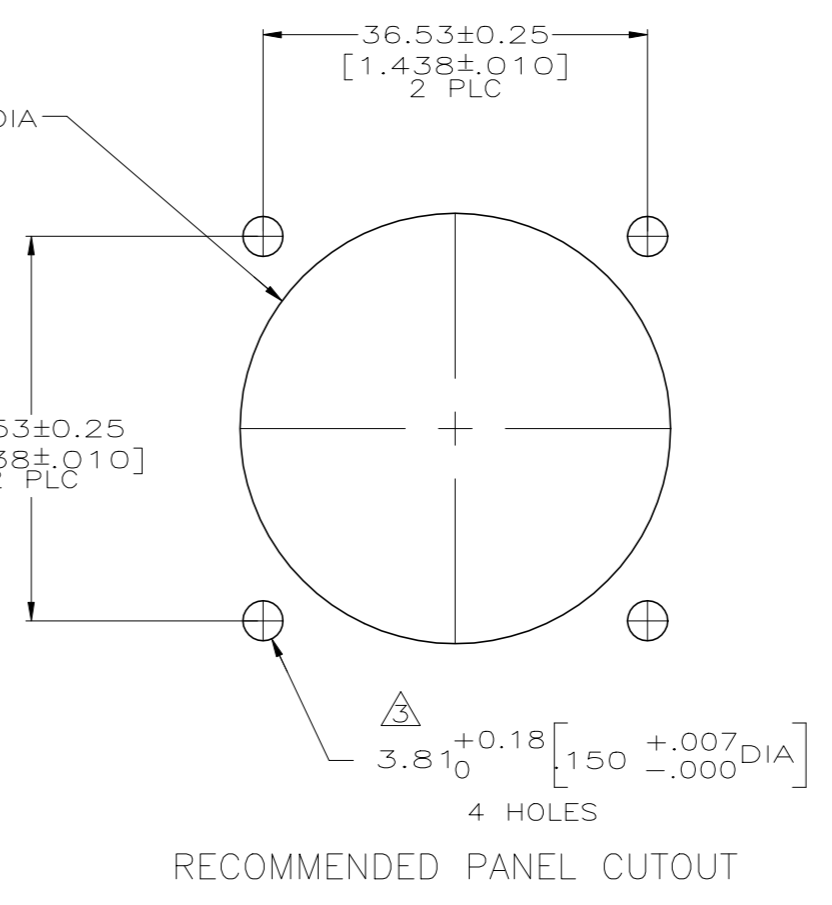
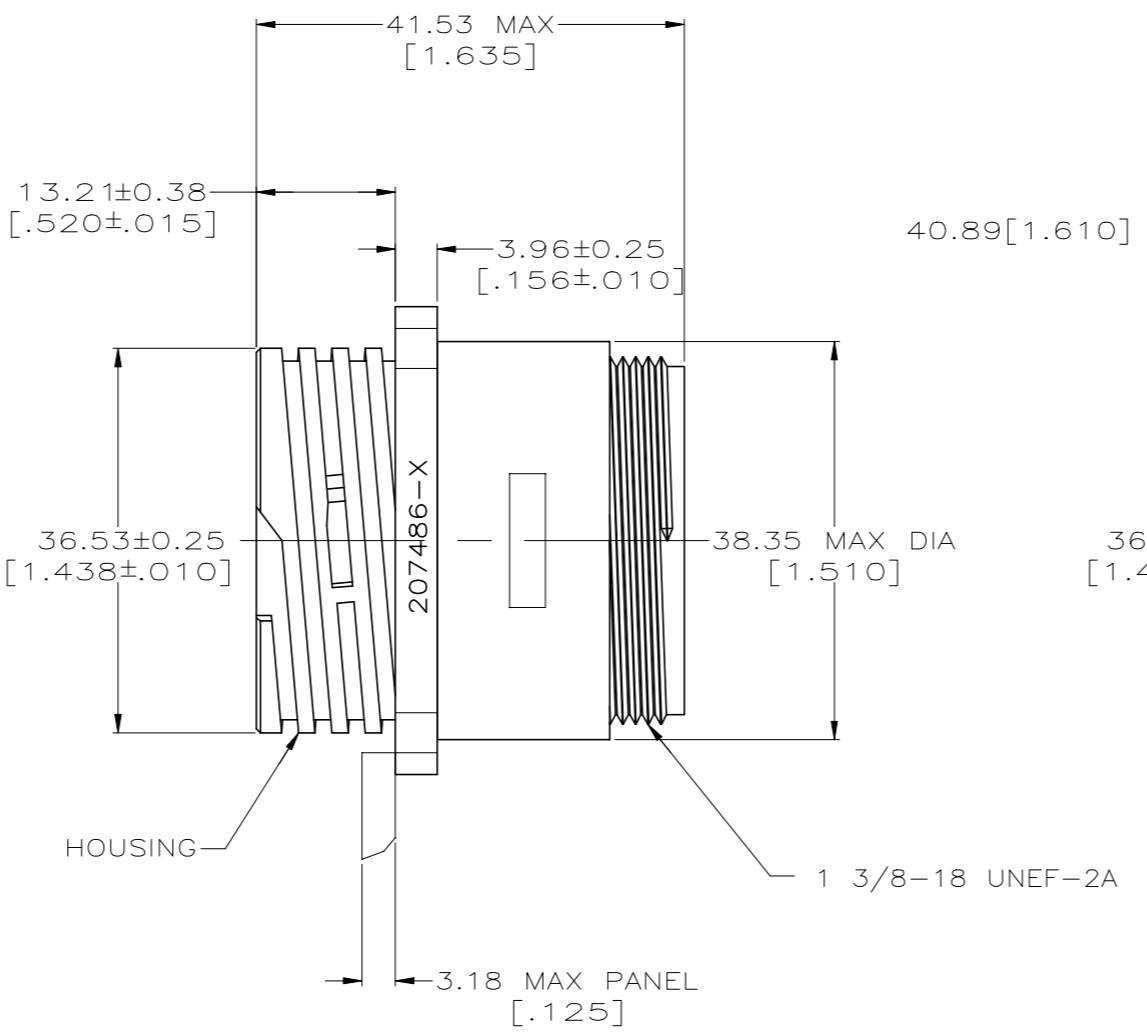
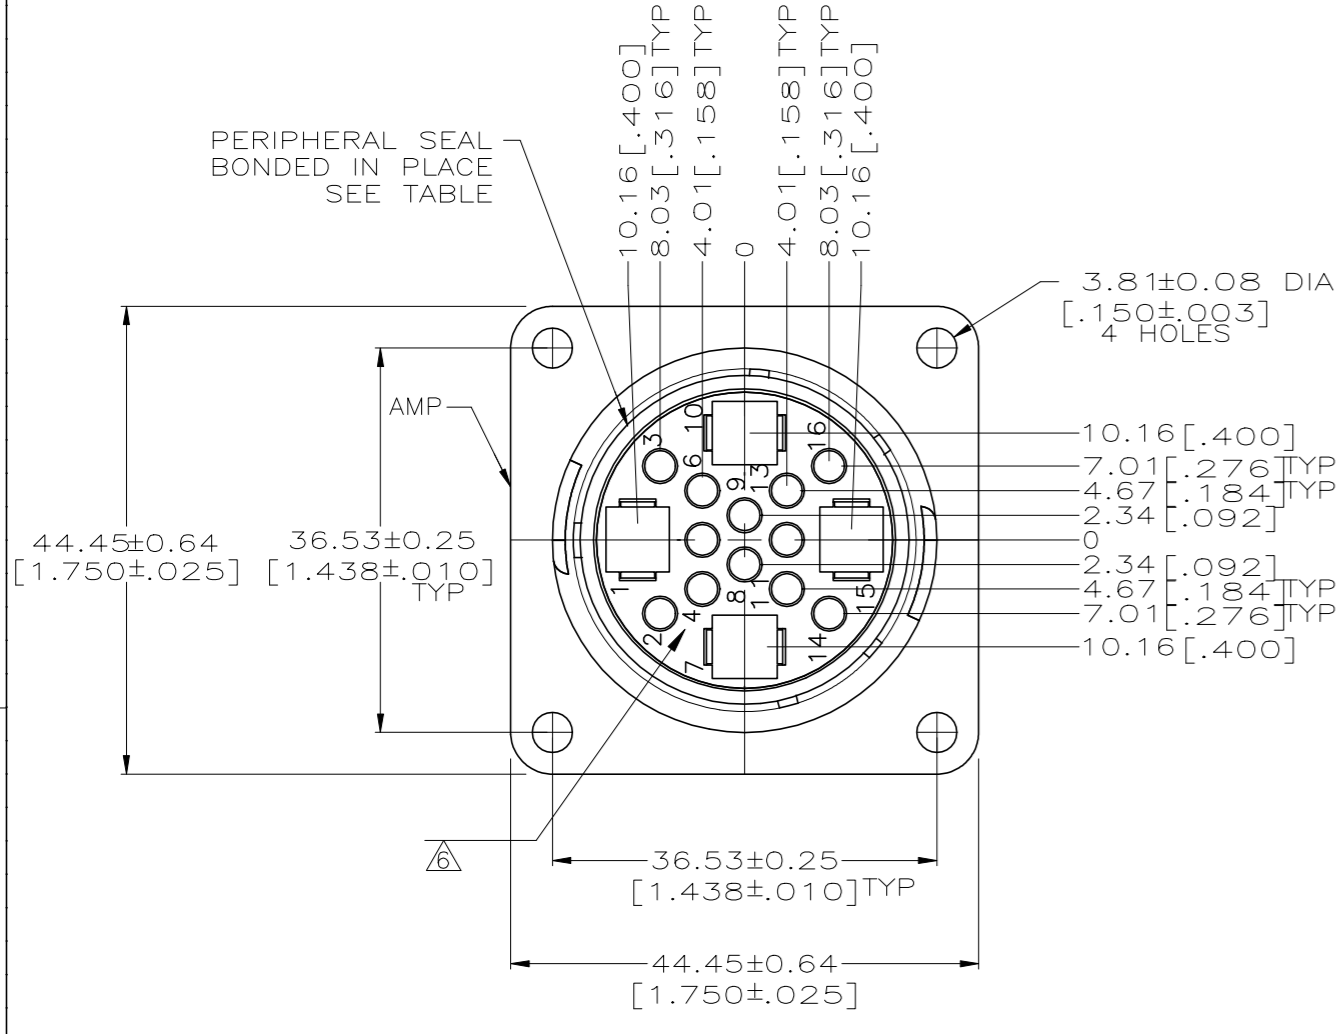


P	LTR	DESCRIPTION	DATE	DWN	APVD
P2		REVISED PER ECO-11-004820	11MAR11	RK	HMR
R		REVISED PER ECR-16-017870	20APR2017	BDA	MZ
S		REVISED PER ECO-19-011232	07AUG2019	RS	MZ

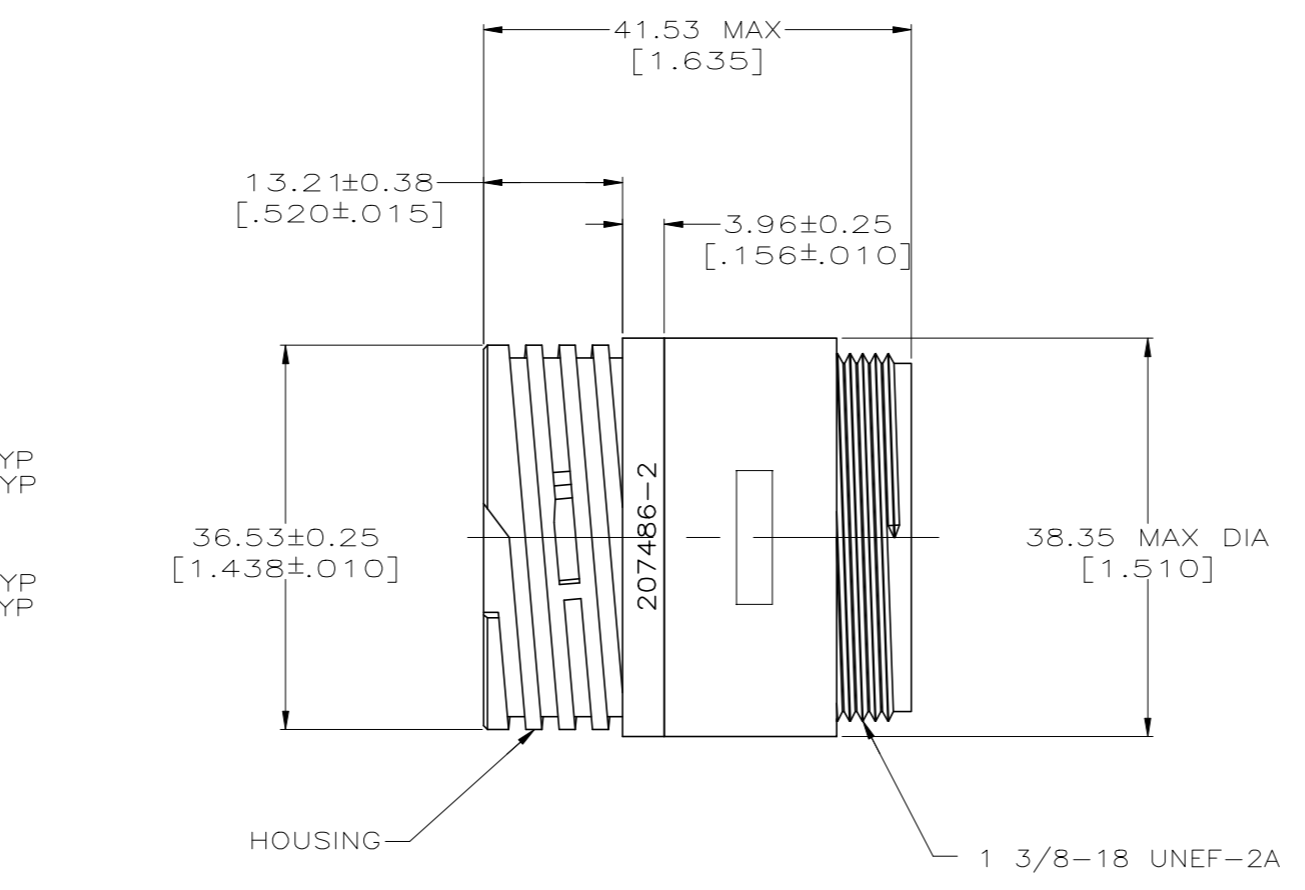

DETAIL A

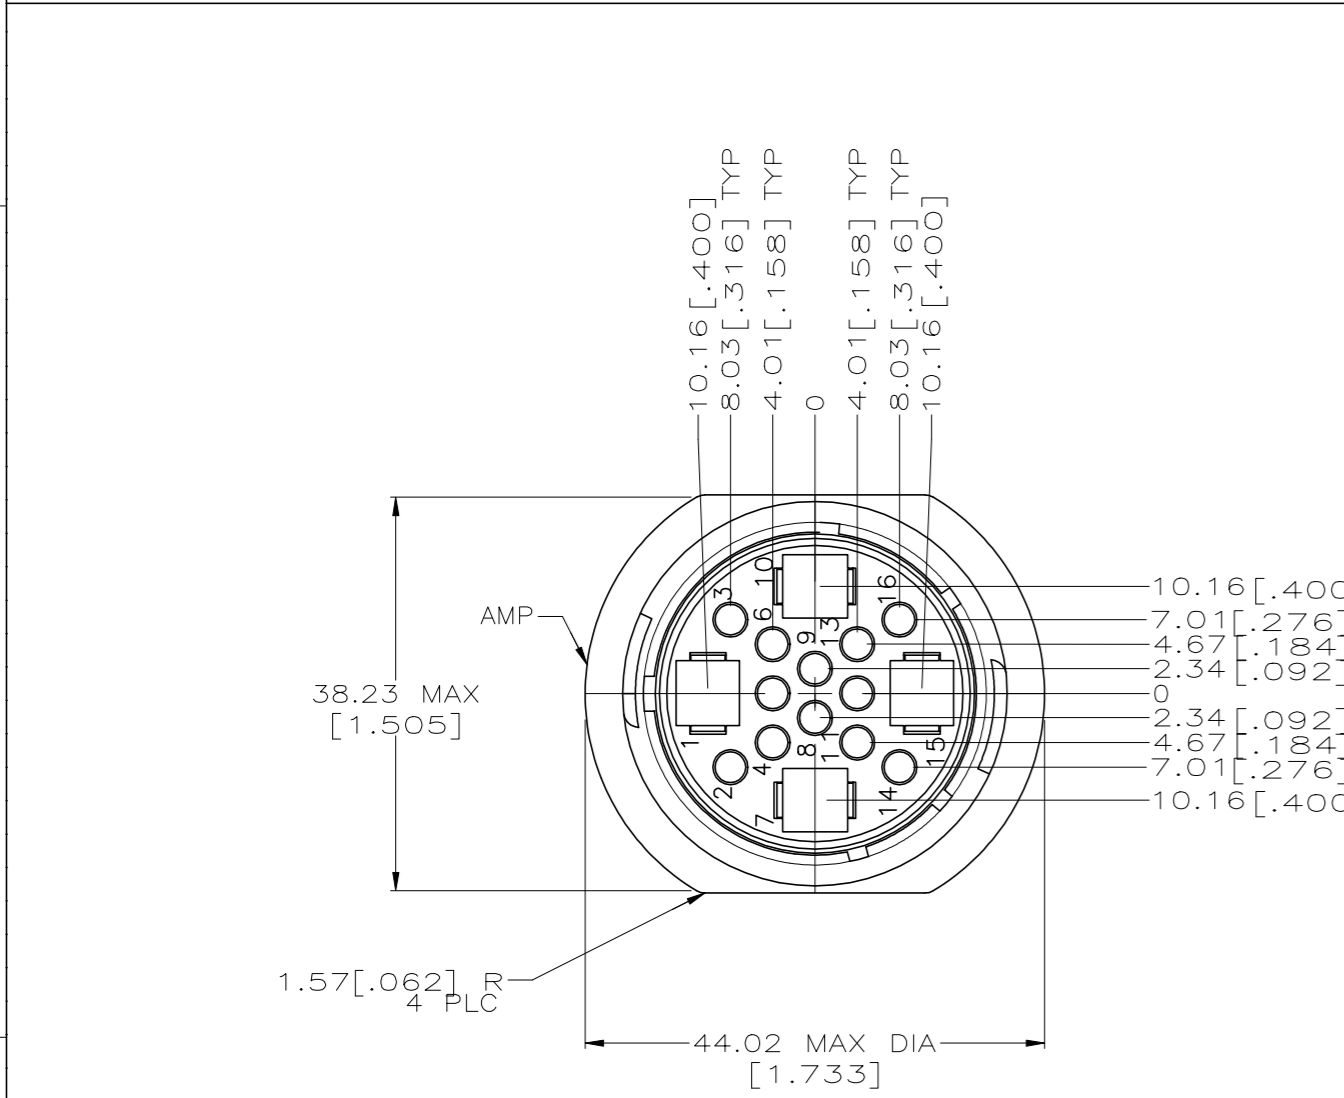

DETAIL B

- WILL ACCEPT (12) MULTIMATE AND (4) TYPE XII PIN CONTACTS.
 - CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
 - NO. 4 FASTENERS RECOMMENDED FOR MOUNTING.
 - THIS CONNECTOR WILL ACCEPT INSULATION DIAMETERS UP TO 3.81 [.150].
- HOUSING: NYLON, BLACK.
 - PERIPHERAL SEAL: ELASTOMER, BLACK.
 - PERMANENT WHITE MARKED OR WHITE INK STAMPED CAVITY IDENTIFICATION.
 - HOUSING: NYLON, RED.
 - PERIPHERAL SEAL: ELASTOMER, GRAY.
 - WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

OBSOLETE	⚠	-	YES	A	1-207486-1
OBSOLETE	⚠	-	YES	A	207486-9
PRELIMINARY	⚠	-	YES	A	207486-7
	⚠	4	YES	A	207486-6
	⚠	-	YES	A	207486-5
	⚠	-	NO	B	207486-2
	⚠	-	NO	A	207486-1
NOTES		THREADED INSERTS	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: M. BINNER 05/26/94
 CHK: R. STONE 6-23-94
 APVD: -

STE TE Connectivity

PRODUCT SPEC: 108-10024
 APPLICATION SPEC: -

SIZE: A1
 CASE CODE: 00779
 DRAWING NO: 207486
 WEIGHT: -
 MATERIAL: -
 FINISH: -

CUSTOMER DRAWING SCALE: 2:1 SHEET 1 OF 1 REV S