


208599-7 Product Details

[Live Product Chat](#)

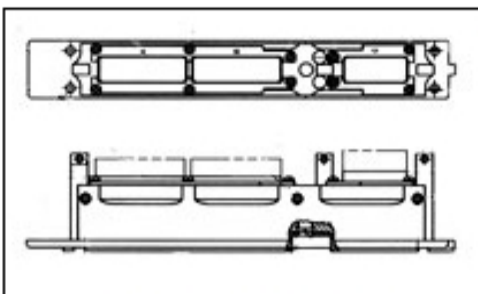

208599-7

TE Part Number: 208599-7

[Active](#)

[Add to Part List](#)

[View 3D PDF](#)

ARINC 600 Connectors

[Not EU RoHS or ELV Compliant \(Find RoHS Compliant Alternates\)](#)

Product Highlights:

- Not Sealed
- Shell Size = 1
- Shell Configuration = Receptacle
- Contact Arrangement (Module A) = 60
- Contact Arrangement (Module B) = 60

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [RECEPTACLE ASSY, SIZE 1, ARINC 600](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [Connector, ARINC 600, Low Insertion Force](#) (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version N)
- [3D Model](#) (IGES, Version N)
- [3D Model](#) (STEP, Version N)

[List all Documents](#)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Sealed](#) = No
- [Shell Size](#) = 1
- Shell Finish = Chromate Conversion Coating
- Comment = Contacts must be ordered separately.

Mechanical Attachment:

- [Keying](#) = 03

Electrical Characteristics:

- [Shell Configuration](#) = Receptacle
- Clinch Nuts = Without

Body Related Features:

- Release Style = Rear

Contact Related Features:

- Contacts = Without

Configuration Related Features:

- [Contact Arrangement \(Module A\)](#) = 60
- [Contact Arrangement \(Module B\)](#) = 60
- [Contact Arrangement \(Module C\)](#) = 5C2

Industry Standards:

- [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C

Other:

- Brand = AMP

[Provide Website Feedback](#) | [Need Help?](#)