

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.


Jameco Part Number 1966608

Ring Tongue Terminals

Material and Finish:

Terminal Body—Copper per ASTM B-152

Plating—Tin per MIL-T-10727

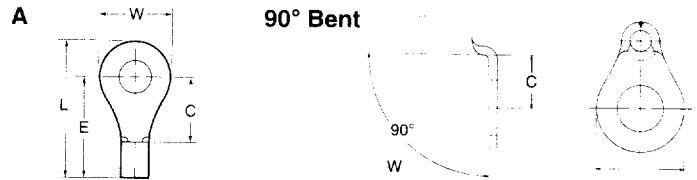

Wire Size Circular Mils [mm ²]	Stud Size	Style	Dimensions				Material Thickness Max.	Wire Barrel I.D. Min.	Part Numbers	
			L Max.	E Max.	C Min.	W				
26-22 202-810 [0.1-0.41]	2 M2	A	.419 10.64	.346 8.79	.211 5.36	.140 3.56	.020 0.51	.031 0.79	50334*	
		A	.449 11.40	.337 8.56	.156 3.96	.218 5.54	.033 0.84	.061 1.55	34103	
	4	A	.449 11.40	.337 8.56	.156 3.96	.218 5.54	.033 0.84	.061 1.55	2-34104-6	
		A	.446 11.33	.353 8.97	.172 4.37	.182 4.62	.033 0.84	.061 1.55	36467*	
	6 M3.5	A	.621 15.77	.493 12.52	.312 7.92	.250 6.35	.033 0.84	.061 1.55	323096 2-323096-2	
		A	.449 11.40	.337 8.56	.156 3.96	.218 5.54	.033 0.84	.061 1.55	34105*	
	8 M4	A	.574 14.58	.436 11.07	.250 6.35	.281 7.14	.033 0.84	.061 1.55	34107* 2-34107-2	
		A	.621 15.77	.462 11.73	.281 7.14	.312 7.92	.033 0.84	.061 1.55	34110*	
	22-16 509-3,260 [0.26-1.65]	10	A	.621 15.77	.462 11.73	.281 7.14	.312 7.92	.033 0.84	.061 1.55	2-34111-3 34108* 2-34108-2
			A	.574 14.58	.436 11.07	.250 6.35	.281 7.14	.033 0.84	.061 1.55	34112* 2-34112-2 34109* 2-34109-2
		90° Bent	—	—	.187 4.75	.312 7.92	.031 0.79	.141 3.58	322768	
16-14 2,050-5,180 [1.04-2.62]	1/4 M6	A	.856 21.74	.618 15.70	.437 11.10	.469 11.91	.033 0.84	.061 1.55	34113* 2-34113-2	
		A	.856 21.74	.618 15.70	.437 11.10	.469 11.91	.033 0.84	.061 1.55	34114* 2-34114-2	
	3/8	A	.995 25.27	.727 18.47	.546 13.87	.531 13.49	.033 0.84	.061 1.55	34115* 2-34115-2	
		A	1.070 27.18	.711 18.06	.530 13.46	.713 18.11	.033 0.84	.061 1.55	329966*	
	4	A	.480 12.19	.352 8.94	.171 4.34	.250 6.35	.033 0.84	.085 2.16	34119*	
		A	.636 16.15	.462 11.73	.281 7.14	.343 8.71	.033 0.84	.085 2.16	34121* 2-34121-1	
	6 M3.5	A	.480 12.19	.352 8.94	.171 4.34	.250 6.35	.033 0.84	.085 2.16	34120* 2-34120-1	
		A	.590 14.99	.431 10.95	.250 6.35	.312 7.92	.033 0.84	.085 2.16	321684*	
	8 M4	A	.636 16.15	.462 11.73	.281 7.14	.343 8.71	.033 0.84	.085 2.16	34122* 2-34122-1	
		A	.636 16.15	.462 11.73	.281 7.14	.343 8.71	.033 0.84	.085 2.16	2-34123-1	
1/4 M6	A	A	.669 16.99	.510 12.95	.250 6.35	.312 7.92	.033 0.84	.085 2.16	320093 2-320093-1	
		A	.855 21.72	.618 15.70	.437 11.10	.469 11.91	.033 0.84	.085 2.16	34124*	
5/16 M8	A	A	.855 21.72	.618 15.70	.437 11.10	.469 11.91	.033 0.84	.085 2.16	34125*	
		A	.995 25.27	.727 18.47	.546 13.87	.531 13.49	.033 0.84	.085 2.16	34126*	
1/2 M12	A	A	1.184 30.07	.806 20.47	.625 15.88	.750 19.05	.033 0.84	.085 2.16	50981	

Note: Part numbers are shown as loose piece over tape mounted product.
* Part numbers are available in small quantity packages.

For complete product information, order Catalog 65505