

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|---------------------------|---------|-------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| AF | 50 | N | REVISED PER ECR-13-004343 | 30JUL13 | KH KR |

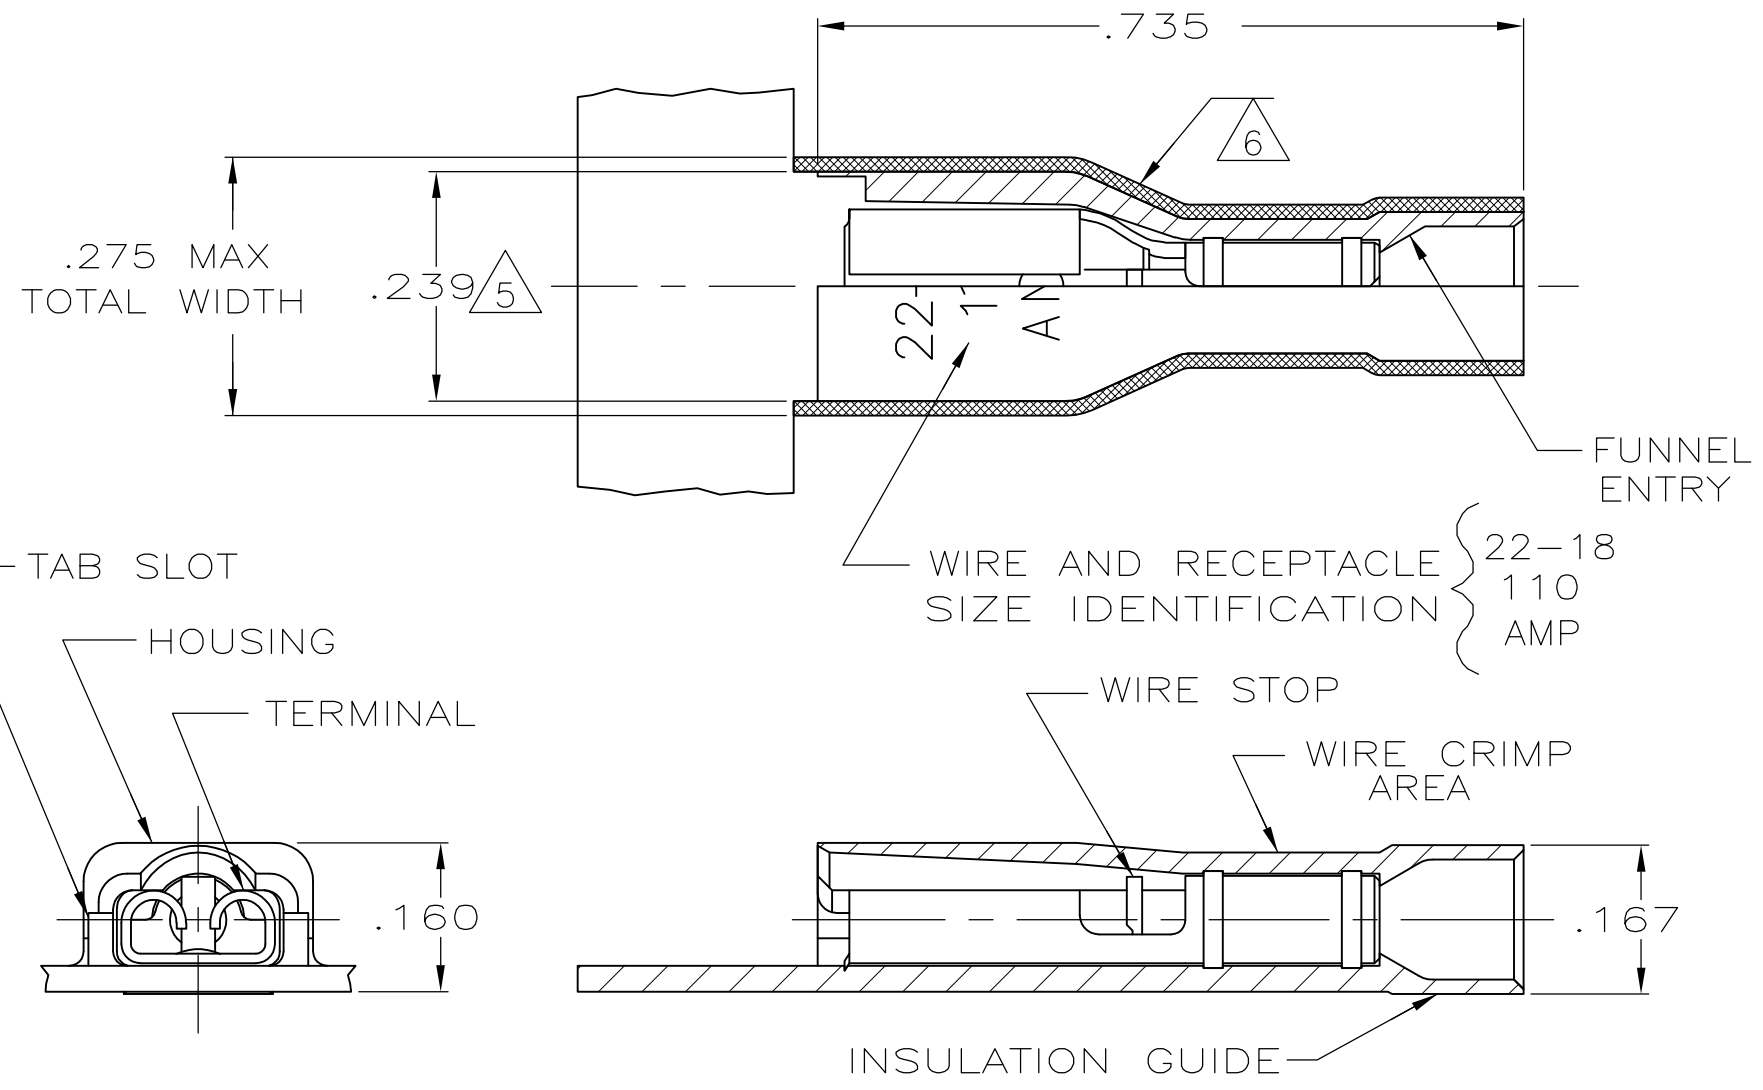

- 1 MATES WITH .032±.001x.110 OR .125 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .120 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

| | |
|--|------------|
| HOUSING:NYLON,COLOR-BLACK TRANSLUCENT RECEPTACLE:BRASS TIN | 9-520272-2 |
| HOUSING:NYLON,COLOR-RED TRANSLUCENT RECEPTACLE:BRASS TIN | 2-520272-2 |
| MATERIAL & FINISH | PART NO |

| | | | | | |
|--|--|--------------------------------|---|------------------------------|--------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN P FORTNEY 11/9/88 | TE Connectivity RECEPTACLE ASSY,ULTRA-FAST, .110/.125 SERIES, 22-18AWG | | |
| DIMENSIONS: INCHES | | CHK MS FEHER 11/9/88 | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD K RANDOLPH 11/11/88 | | | |
| 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .015 4 PLC ± - ANGLES ± - | | NAME | | | |
| MATERIAL SEE TABLE | | FINISH SEE TABLE | PRODUCT SPEC 108-2043 | APPLICATION SPEC 114-2123 | RESTRICTED TO |
| | | | WEIGHT - | SIZE A3 | CAGE CODE 00779 |
| | | | DRAWING NO C-520272 | | SCALE 5:1 |
| | | | CUSTOMER DRAWING | | SHEET 1 OF 1 |
| | | | | | REV N |