

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	A3		OBSOLETE PER MCO-40024188MCO	25MAR11	HG	TE

- 1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.5dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm (SEE TABLE)
- 2. MINIMUM RETURN LOSS: 55 dB
- 3. FOR 2-5492019-0, TRACE LABELS PLACED AT CENTER OF THE CABLE ASSEMBLY.
- 4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TE CONNECTIVITY STANDARD 230-702

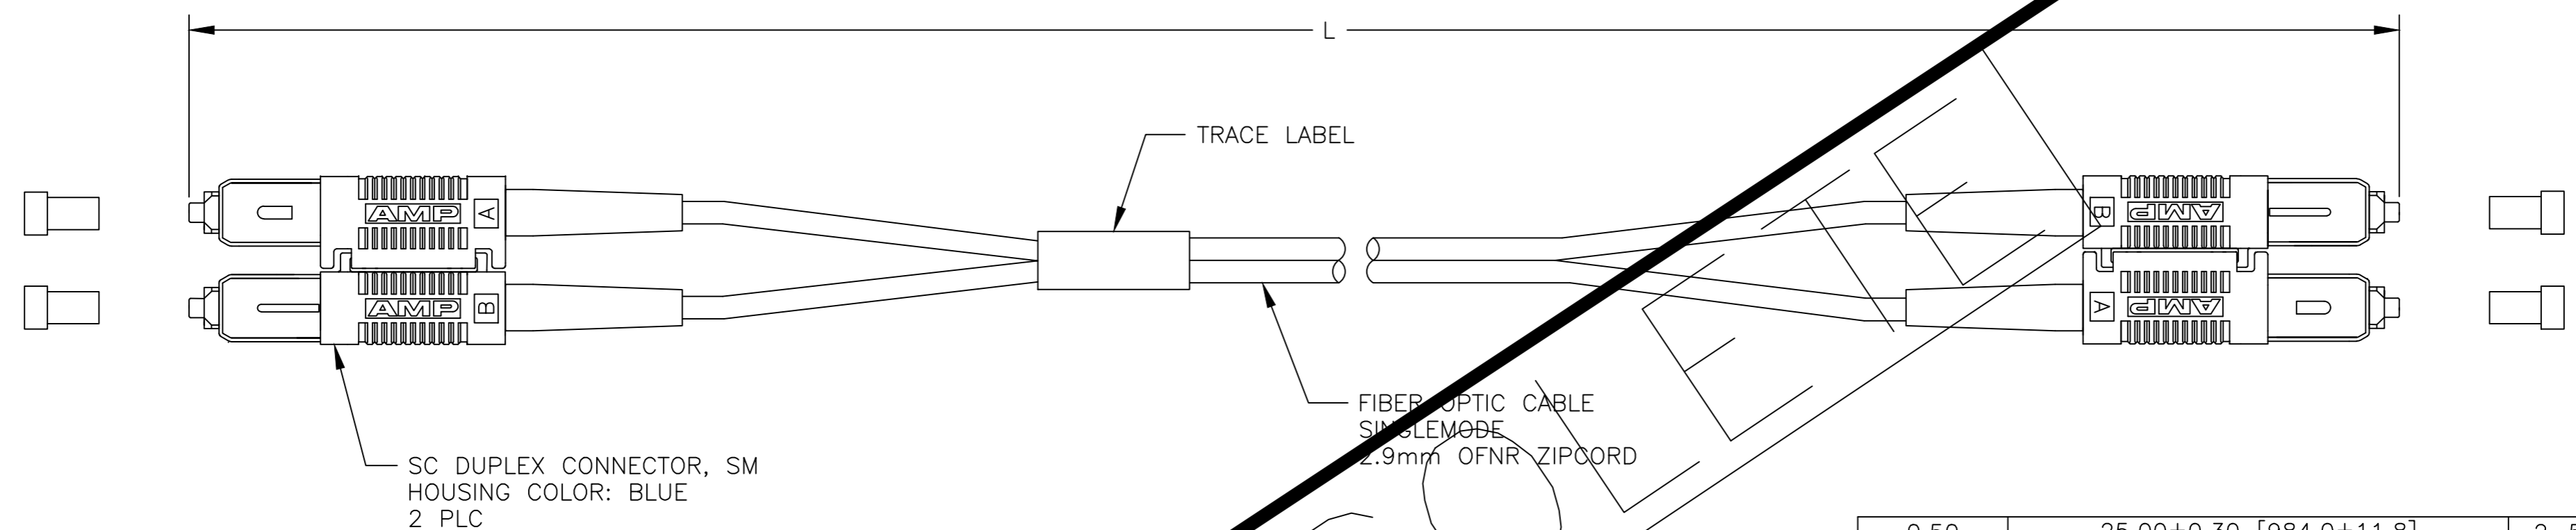

SC DUPLEX CONNECTOR, SM HOUSING COLOR: BLUE 2 PLC

FIBER OPTIC CABLE SINGLEMODE 2.9mm OFNR ZIPCORD

0.50	25.00±0.30 [984.0±11.8]	2-5492019-5
0.50	4.00±0.08 [157.5±3.2]	2-5492019-4
0.50	1.50±0.05 [59.1±2.0]	2-5492019-3
0.50	0.50±0.03 [19.7±1.0]	2-5492019-2
0.50	12.19±0.15 [480.0±5.9]	2-5492019-1
3 0.50	0.30+0.05/-0.0 [11.8+2.0/-0]	2-5492019-0
0.50	0.61±0.03 [24.0±1.0]	1-5492019-4
0.53	50.00±0.50 [1968.5±19.7]	1-5492019-3
0.50	6.00±0.08 [236.2±3.0]	1-5492019-1
0.50	7.00±0.08 [275.6±3.2]	1-5492019-0
0.52	30.00±0.30 [1181.1±11.8]	5492019-8
0.51	20.00±0.30 [787.4±11.8]	5492019-7
0.50	15.00±0.15 [591.6±5.9]	5492019-6
0.50	10.00±0.15 [393.7±5.9]	5492019-5
0.50	5.00±0.08 [196.8±3.2]	5492019-4
0.50	3.00±0.05 [118.1±2.0]	5492019-3
0.50	2.00±0.05 [78.7±2.0]	5492019-2
0.50	1.00±0.05 [39.4±2.0]	5492019-1
MAX IL (dB) 1	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. W. DAVIS 24OCT05	TE Connectivity
CHK J. DUNCAN 20AUG2015	
APVD F. McCORKEL 24OCT05	NAME
PRODUCT SPEC	CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE, 2.9mm OFNR ZIPCORD, SC DUPLEX TO SC DUPLEX, RoHS
APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
WEIGHT	A2 00779 C=5492019
CUSTOMER DRAWING	SCALE NTS SHEET 1 of 1 REV A3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity Divested:](#)

[1933358-1](#)