

HEADERS & RECEPTACLES

















PRODUCT DRAWING



3D PDF

TE CONNECTIVITY (TE)

24P MTA100 HDR ASSY F/L SQ STR

MTA | MTA-100

2-640456-4

TE Internal Number: 2-640456-4

Always EU RoHS/ELV Compliant

Centerline 2.54 mm [.1 in]

Number of Positions 24

PCB Mounting Orientation Vertical

PCB Mounting Style Through Hole

Number of Rows 1

Product Drawings

MTA-100 HEADER ASSEMBLY, POLARIZED, NOTCHED, .025 SQUARE STRAIGHT

POST, TIN PLATED

PDF English

CAD Files

Customer View Model

2D_DXF.ZIP English

3D PDF

Customer View Model 3D_IGS.ZIP

English

Customer View Model

3D_STP.ZIP English

Catalog Pages/Data Sheets

MTA, CST-100 II, SL-156 And AMP Economy Power (EP) Connectors

PDF **English**

Product Specifications

Qualification Test Report

Product Specification Connector, MTA-100

PDF **English**

Connector, MTA-100

PDF English

Connector, MTA-100

TIF English

Product Environmental Compliance

TE Material Declaration

MD_2-640456-4_02222011758

PDF **English**

Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	PCB Mounting Orientation	Vertical
	Product Type	Connector
	Connector Type	Header
	Connector System	Wire-to-Board
	Strain Relief	Without
	Sealed	No
	Connector Style	Plug
	Applies To	Printed Circuit Board
Configuration Features	Number of Positions	24
	Number of Rows	1
	Backwall/Post Interruptions	Without
Electrical Characteristics	Operating Voltage (VAC)	250
ody Features	Header Type	Unshrouded
Contact Features	Contact Mating Area Plating Material	Tin
	Contact Mating Area Plating Thickness	3.81 µm [150 µin]
	Underplate Material	Nickel
	Underplate Material Thickness	1.27 µm, 50 µin
	Contact Style	Straight
	Contact Shape	Square
	Tail Plating Material	Tin
	Contact Termination Area Plating Material	Tin
	Tail Plating Thickness	3.81 µm [150 µin]
	Contact Type	Pin
	Contact Current Rating (A)	5
	Contact Layout	Inline
	Contact Base Material	Copper Alloy
Commingation Execuses	Targetian Mathed to DC Decad	Through Halo Cald

Termination Method to PC Board

Termination Method to Wire/Cable


Through Hole - Solder

Solder

Termination Features

1 0111111111111111111111111111111111111	111001100	w	T T II U/ UUN IU	

Mechanical Attachment	PCB Mounting Style	Through Hole	
	PCB Mount Alignment	Without	
	Mating Retention	Without	
	PCB Mount Retention	Without	
	Contact Retention	Without	
	Panel Mount Retention	Without	
	Mating Alignment	Without	
Housing Features	Centerline	2.54 mm [.1 in]	
	Housing Color	Natural	
	Housing Style	Friction Lock	
	Housing Material	Polyester - GF	
Dimensions	Tail Length	3.56 mm [.14 in]	
	Mating Post Length	7.49 mm [.295 in]	
	PCB Thickness (Recommended)	1.6 mm [.063 in]	
	Height	7.87 mm [.31 in]	
	Length	60.96 mm [2.4 in]	
Usage Conditions	Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]	
Operation/Application	For Use With	MTA .100 Connector Assembly	
	Pick and Place Cover	Without	
ndustry Standards	UL Flammability Rating	UL 94V-0	
	UL File Number	E28476	
	CSA Rating	Certified	
	CSA Rating Agency/Standard	Certified CSA, UL	
	Agency/Standard	CSA, UL	
Packaging Features	Agency/Standard CSA File Number	CSA, UL LR7189	

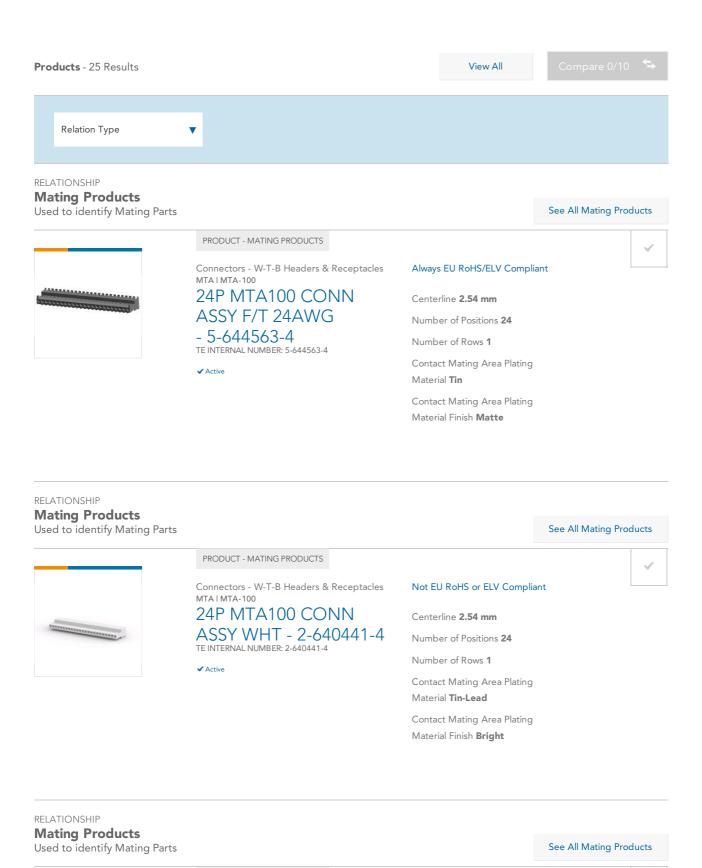

MTAIMTA-100 24P MTA100 CONN ASSY POL SN - 5-643814-4

Connectors - W-T-B Headers & Receptacles

PRODUCT - MATING PRODUCTS

Always EU RoHS/ELV Compliant

Centerline **2.54 mm**Number of Positions **24**

- J-U+JU | +-+ TE INTERNAL NUMBER: 5-643814-4

Number of Rows 1

Contact Mating Area Plating Material **Tin**

Contact Mating Area Plating Material Finish **Matte**