


## 292228-3 Product Details

[Share](#) [Print](#) [Email](#)

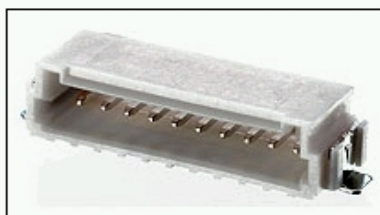

292228-3

TE Internal Number: 292228-3

 **Active**

 [View 3D PDF](#)

### 1.5mm AMP Mini CT Connectors

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

#### Product Highlights:

- Wire-to-Board
- Applies To Printed Circuit Board
- Connector
- Header
- Header Type = Shrouded

[View all Features](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(4\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

 [Add to My Part List](#)  [Request Sample](#)  [Find Similar Products](#)  [Buy Product](#)

#### Documentation & Additional Information

##### Product Drawings:

- [AMP Mini CT Connector 1.5mm PITCH SINGLE ROW POST HD...](#) (PDF, English)

##### Catalog Pages/Data Sheets:

- None Available

##### Product Specifications:

- [AMP MINI COMMON TERMINATION \(CT\), CONNECTOR, 1.5mm ...](#) (PDF, Japanese)
- [AMP Mini CT Connector 1.5mm Pitch \(Crimp Type\), Lead...](#) (PDF, Japanese)

##### Application Specifications:

- None Available

##### Instruction Sheets:

- None Available

##### CAD Files: [\(CAD Format & Compression Information\)](#)

- [2D Drawing](#) (DXF, Version A)
- [3D Model](#) (IGES, Version A)
- [3D Model](#) (STEP, Version A)

##### Related Products:

- [Tooling](#)
- [Mating Products \(4\)](#)

[List all Documents](#)

#### Product Features (Please use the Product Drawing for all design activity)

##### Product Type Features:

- Product Type = Connector
- Connector Type = Header
- Termination Method to PC Board = Surface Mount
- PCB Mounting Orientation = Right Angle
- PCB Mount Alignment = Without
- [PCB Mount Retention](#) = With
- Shrouded = Yes
- Sealed = No
- UL File Number = E28476
- CSA File Number = LR 7189-133

##### Mechanical Attachment:

- Mating Post Length (mm [in]) = 2.40 [0.095]

##### Electrical Characteristics:

- Contact - Rated Current (A) = 2
- Operating Voltage Reference = AC/DC, AC, DC
- Operating Voltage (VAC) = 50
- Operating Voltage (VDC) = 50

##### Termination Features:

- Wire/Cable Size (AWG) = 24 - 28
- Tail Orientation = In-line

##### Body Features:

- Header Type = Shrouded
- [Number of Positions](#) = 3
- [Number of Rows](#) = 1
- Centerline (mm [in]) = 1.50 [0.059]
- Mating Retention = With
- PCB Mount Retention Type = Solder Pads
- Length (X-Axis) (mm [in]) = 9.00 [0.354]
- Width (Z-Axis) (mm [in]) = 4.90 [0.192]
- Profile Height (Y-Axis) (mm [in]) = 7.70 [0.303]

##### Contact Features:

- Contact Type = Pin
- Contact Plating, Mating Area, Material = Tin
- Contact Plating, Mating Area, Thickness (µm [µin]) = 1 [39.37]
- Contact Design = Square Post
- Tail Plating Material = Tin
- Tail Plating, Thickness (µm [µin]) = 1 [40]

##### Housing Features:

- Mating Alignment = With
- Housing Color = Natural
- UL Flammability Rating = UL 94V-0

##### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Reflow solder capable to 245°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- Agency/Standard = UL, CSA

##### Environmental:

- Operating Temperature (°C [°F]) = -30 - +105 [-22 - +221]

##### Conditions for Usage:

- Applies To = Printed Circuit Board
- PCB Thickness, Recommended (mm [in]) = 0.80 [0.031]
- Accepts Wire Insulation Diameter, Range (mm [in]) = 0.85 - 1.05 [0.0334 - 0.041]

##### Operation/Application:

- Application Use = Wire-to-Board
- Contact Transmits (Typical Application) = Signal (Data)
- Pick and Place Cover = Without

##### Packaging Features:

- Packaging Method = Tape, Box

##### Other:

- Brand = AMP

#### Corporate Information

[Who We Are](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)

#### Quick Links

[Check Distributor Inventory](#)  
[Cross Reference](#)  
[Find Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

#### Customer Support

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Search Knowledge Base](#)  
[Manage your Account](#)

#### Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

