



1473562-4: AS SHOWN  
 1473562-4: 本圖

注記  
 1 材料: PLUG HOUSING: ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒  
 HOLD HOUSING: ポリカーボネイト 94V-0 黄色: 0-、赤色: 1-、青色: 2-  
 コンタクト: 銅合金  
 2 メッキ: 全面Ni下地: 1.27μm以上  
 接点部: 0.2μm MIN 金メッキ  
 3 -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません

NOTE  
 1 MATERIAL: PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK  
 HOLD HOUSING : PC, 94V-0, YELLOW: 0- . RED: 1- . BLUE: 2-  
 CONTACT : COPPER ALLOY  
 2 FINISH: UNDERPLATE : Ni 1.27μm min  
 CONTACT AREA : Au 0.2μm min  
 3 V--5(5POS) AND X--7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.




PLUG HOUSING

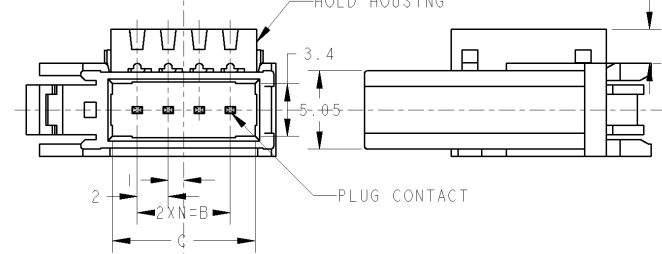

HOLD HOUSING

PLUG CONTACT



<Table of Insulation Dia (Cable suitable for e-CON.)>  
 <被覆外径一覧表 (e-CON 対応電線)>

HOLD HSG COLOR	INSULATION DIA	P/N	SHEET No
ORANGE	φ0.60~0.90	3-1473562-□	SEE SHEET 3
RED	φ0.90~1.00	1-1473562-□	SEE SHEET 1
YELLOW	φ1.00~1.15	1473562-□	SEE SHEET 1
BLUE	φ1.15~1.35	2-1473562-□	SEE SHEET 1
GREEN	φ1.35~1.60	4-1473562-□	SEE SHEET 2

WIRE RANGE 色別電線番号	SEE 108-5765	INSULATION DIA 被覆径
BLUE	20.35 17.2 14 24.1 7 8	2-1473562-8
RED	20.35 17.2 14 24.1 7 8	1-1473562-8
YELLOW	20.35 17.2 14 24.1 7 8	1473562-8
BLUE	20.35 17.2 14 24.1 7 7	△3 2-1473562-7
RED	20.35 17.2 14 24.1 7 7	△3 1-1473562-7
YELLOW	20.35 17.2 14 24.1 7 7	△3 1473562-7
BLUE	16.35 13.2 10 20.1 5 6	2-1473562-6
RED	16.35 13.2 10 20.1 5 6	1-1473562-6
YELLOW	16.35 13.2 10 20.1 5 6	1473562-6
BLUE	16.35 13.2 10 20.1 5 5	△3 2-1473562-5
RED	16.35 13.2 10 20.1 5 5	△3 1-1473562-5
YELLOW	16.35 13.2 10 20.1 5 5	△3 1473562-5
BLUE	12.35 9.2 6 16.1 3 4	2-1473562-4
RED	12.35 9.2 6 16.1 3 4	1-1473562-4
YELLOW	12.35 9.2 6 16.1 3 4	1473562-4
BLUE	10.35 7.2 4 14.1 2 3	2-1473562-3
RED	10.35 7.2 4 14.1 2 3	1-1473562-3
YELLOW	10.35 7.2 4 14.1 2 3	1473562-3
HOLD HSG COLOR	D C B A N POS	P/N

取扱説明書 (Instruction Sheet): 411-78014

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION  
 IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION  
 SHOULD BE CONTACTED FOR THE LATEST REVISION.


DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	±
1 PLC	±0.2
2 PLC	±3°
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL SEE NOTE  
 FINISH 見上 SEE NOTE






DRW D. MITSUGI	10SEP2001	Tyco Electronics AMP K.K. Kawasaki, Japan
CHK S. MANABE	10SEP2001	
APPV S. MANABE	10SEP2001	
PRODUCT SPEC 製品仕様	108-5765	NAME 名称
APPLICATION SPEC 取付用仕様		PLUG ASSY FOR e-CON - RITS CONN. -
WEIGHT		SIZE CAGE CODE DRAWING NO. 番号
		A3 00779 C-1473562
CUSTOMER DRAWING		SCALE 寸法
		4:1 SHEET 1 OF 3 REV C

REV. NO.	DATE	DESCRIPTION	ECN	DWN	APVD
1		SEE SHEET 1 OF 3			

4-1473562-4: AS SHOWN  
 4-1473562-4: 本図

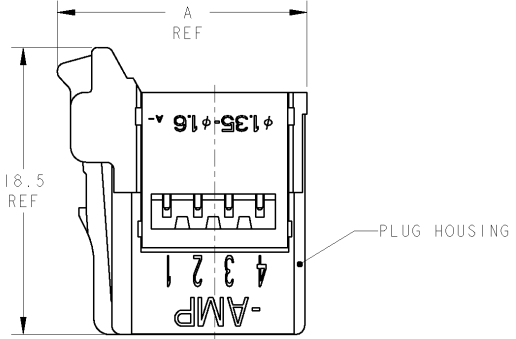

- △ 材料 PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒  
 HOLD HOUSING : ポリカーボネイト 94V-0 緑色: 4-  
 コンタクト: 銅合金
- △ 仕上げ 全面: ニッケルメッキ下地 1.27μm以上  
 接点部: 金メッキ 0.2μm以上
- △ -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着されません
- △ MATERIAL PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK  
 HOLD HOUSING : PC, 94V-0, GREEN: 4-  
 CONTACT : COPPER ALLOY
- △ FINISH UNDERPLATE : Ni PLATING ALL SURFACE 1.27μm MIN  
 CONTACT AREA : Au PLATING 0.2μm MIN
- △ -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT NO 6 AND 8.

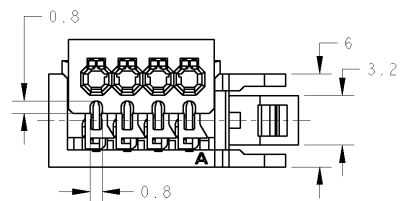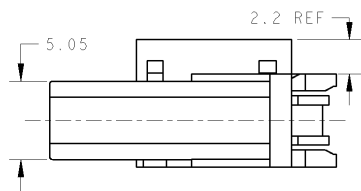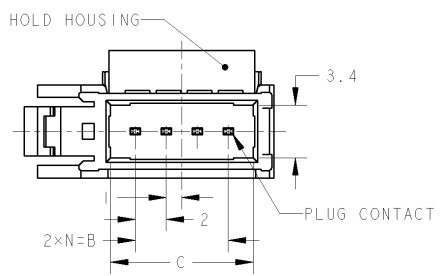

取扱説明書 (Instruction Sheet): 411-78014

HOLD HSG COLOR	D	C	B	A	N POS.	PART NUMBER
GREEN	20.35	17.2	14	24.1	7 8	4-1473562-8
	20.35	17.2	14	24.1	7 7	△4-1473562-7
	16.35	13.2	10	20.1	5 6	4-1473562-6
	16.35	13.2	10	20.1	5 5	△4-1473562-5
	12.35	9.2	6	16.1	3 4	4-1473562-4
	10.35	7.2	4	14.1	2 3	4-1473562-3

DIMENSIONS: 単位: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±3 3 PLC ± 4 PLC ± ANGLES ± FINISH 上		DWN K. RIKU 26DEC02 CHN D. MITSUGI 26DEC02 APVD S. MANABE 26DEC02 PRODUCT SPEC 108-5765 APPLICATION SPEC 取付配線図		Tyco Electronics AMP K.K. Kawasaki, Japan NAME PLUG ASSY FOR e-CON - RITS CONN. - SIZE CAGE CODE DRAWING NO. RESTRICTED TO A3 00779 C-1473562	
MATERIAL 種類 SEE NOTE 1		WEIGHT - CUSTOMER DRAWING		SCALE 3:1 SHEET 2 OF 3 REV C	





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 2003 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS						
J	-	P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
				SEE SHEET 1 OF 3				

3-1473562-4 : AS SHOWN  
 3-1473562-4 : 本圖

- ① 材料: PLUG HOUSING : ガラス入り熱可塑性ポリエステル樹脂 94V-0 黒  
 HOLD HOUSING : ポリカーボネイト 94V-0 オレンジ色: 3-  
 コンタクト: 銅合金
- ② メッキ: 全面ニッケル下地: 1.27μm以上  
 接点部: 金メッキ: 0.2μm以上
- ③ -5(5POS)と-7(7POS)は、回路番号6と8にコンタクトが装着させられます。

- ① MATERIAL: PLUG HOUSING : GLASS FILLED THERMOPLASTIC, 94V-0, BLACK  
 HOLD HOUSING : PC, 94V-0, ORANGE: 3-  
 CONTACT : COPPER ALLOY
- ② FINISH: UNDERPLATE : Ni 1.27μm MIN  
 CONTACT AREA : Au 0.2μm MIN
- ③ -5(5POS) AND -7(7POS) DO NOT EQUIP WITH CONTACT OF CIRCUIT No. 6 & 8.

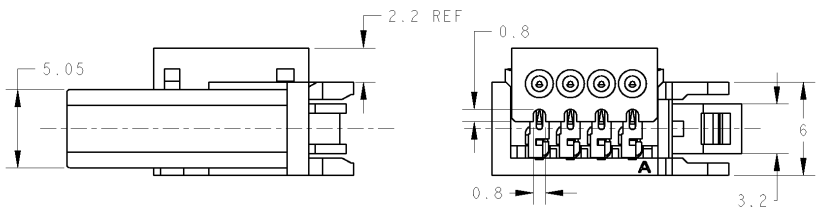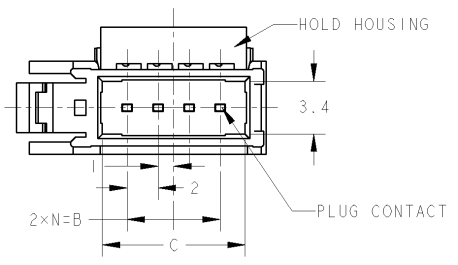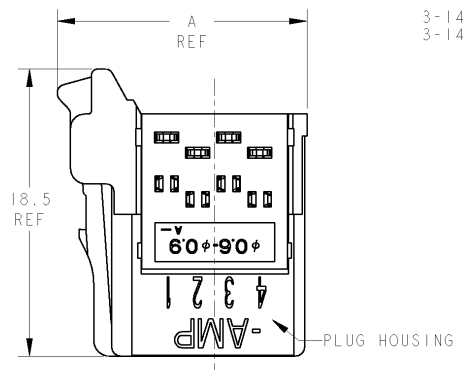

取扱説明書(Instruction Sheet): 411-78010

HOLD HSG COLOR	D	C	B	A	N	POS.	P/N
	20.35	17.2	14	24.1	7	8	3-1473562-8
	20.35	17.2	14	24.1	7	7	③ 3-1473562-7
ORANGE	16.35	13.2	10	20.1	5	6	3-1473562-6
	16.35	13.2	10	20.1	5	5	③ 3-1473562-5
	12.35	9.2	6	16.1	3	4	3-1473562-4
	10.35	7.2	4	14.1	2	3	3-1473562-3

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. YOKOZAKI 21 JAN '03 CHN D. MITSUGI 30 JAN '03 APVD S. MANABE 30 JAN '03		<b>tyco</b> Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
DIMENSIONS: 単位: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 0 PLC ± 0.2 1 PLC ± 0.2 2 PLC ± 3° 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-5765 APPLICATION SPEC 取付用規格		NAME PLUG ASSY FOR e-CON - RITS CONN. -	
MATERIAL ① SEE NOTE FINISH ② SEE NOTE		WEIGHT - SIZE A3 CAGE CODE 00779 DRAWING NO. C-1473562		RESTRICTED TO - SCALE 4:1 SHEET 3 OF 3 REV C	
CUSTOMER DRAWING					