


G	14					REV 10/24	ME
ZONE	LTR				DESCRIPTION	DATE	APPD
	L				REV / 0720-0380-94	8/1/94	ME

AMP WIRE RANGE	Listed FILE E13288	LR7188 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

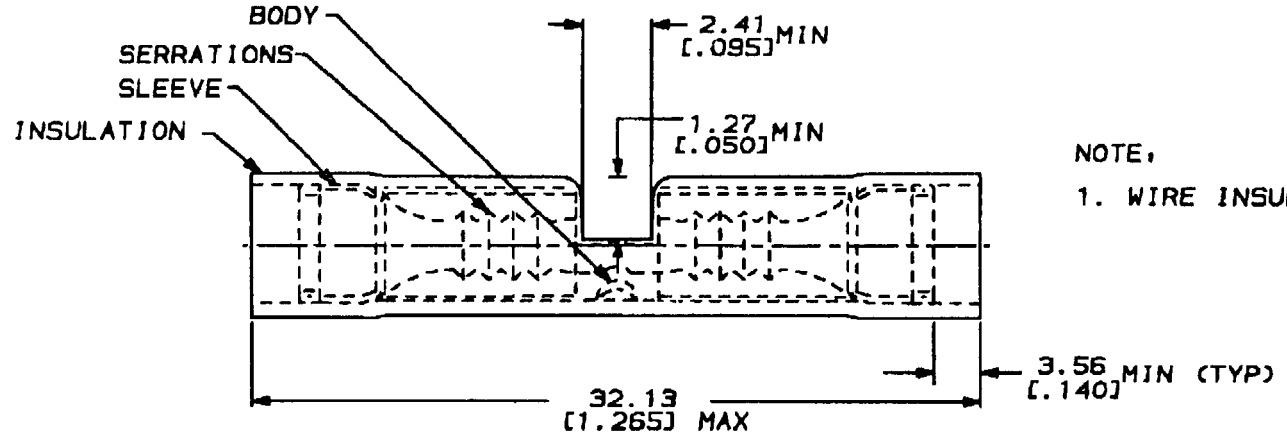

NOTE:
 1. WIRE INSULATION DIA 2.67 [.105] TO 3.81 [.150]

-	100	LOOSE PIECE, BOX	8-320562-5
-	5	LOOSE PIECE, BLS	8-320562-4
-	50	LOOSE PIECE, BOX	8-320562-2
M7928/S-4 CLASS 2	2500	ON TAPE	2-320562-3
M7928/S-4 CLASS 1 & 2	50	LOOSE PIECE	320562
MILITARY PART NUMBER & CLASS PER MIL-T-7928	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-8752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C
VOLTAGE RATING: 800V MAX 1000 V MAX (WETURE OR STND)
CIRCULAR MIL AREA: 1.04-2.62 mm² (2,050-5,100)
SOLID OR STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ON: 2 PLC DEC & 0.251.000 3 PLC DEC & - ANGLES & -	OR S.S. SOLDER S. JERNEY S. SERTON
MATERIAL COPPER PER ASTM B-152 NYLON, COLOR, BLUE	APPD 8-28-83 S. SELLER PRODUCT SPEC
FINISH TIN PLATE PER MIL-T-10727	APPLICATION SPEC -
	WEIGHT -

AMP AMP Incorporated Harrisburg, PA 17106-3608		
NAME SPLICE, BUTT, P.I.D.G., WIRE SIZE: 16-14 AWG		
SIZE B	CAGE CODE 00779	DRAWING NO C-320562
SCALE NTS	SHEET 1 OF 1	