




DO NOT SCALE

DIMENSIONS IN MM.

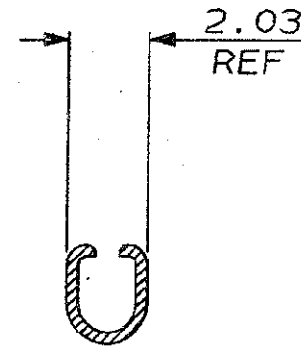

C.A.D. FILE CODE
S. C344995.A

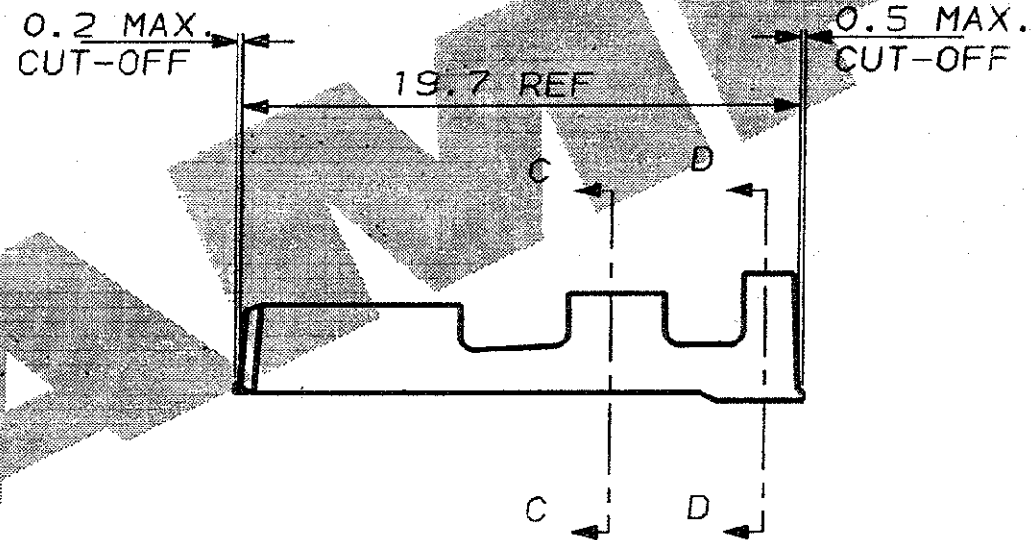

SECTION C C.



SECTION D D.

WIRE RANGE 0.5 TO 1.5 mm²

INS. RANGE 1.6 TO 2.4mm DIA. (THIN WALLED CABLE)

PRODUCT SPEC. 108-3069

APPLICATION SPEC. 114-3036

H/TOOL PN.525316-4 (FOR 0.5 TO 0.75mm² AND 1 TO 1.5mm² WIRES)

SEALED APPLICATIONS ONLY

PRE-TINNED BRASS		MADE FROM STRIP PN.344070-1		344995-1	
FINISH		MATERIAL		PART NUMBER	
CUSTOMER DWG FOR REFERENCE ONLY		©COPYRIGHT 1991 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.		RELEASED FOR PUBLICATION 25 SEP 1991	
-	-	-	-	TOLERANCES UNLESS OTHERWISE STATED :	DR. R.J.S. 25.9.91
-	-	-	-	DEC ± 0.5	CH. <i>[Signature]</i> 25/9/91 APP. J.P.
-	-	-	-	ANGLES ± 1°	AMP of Great Britain Ltd. TERMINAL HOUSE STANMORE MIDDX.
-	-	-	-	NAME	.250 SERIES REC. (LOOSE PIECE) ECONOSEAL 3 H.C. (SEALED)
A	ES00-0041-01	-	14.01.01	SCALE	LOC
1	PRELIM. ISSUE	-	25.9.91	SIZE	DWG.No.
REV	APPROVED	ECN	DATE	4/1	E A3
					C344995
					REV A
					SHEET 1/1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[344995-1](#)