
Distributed by:



The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 845492

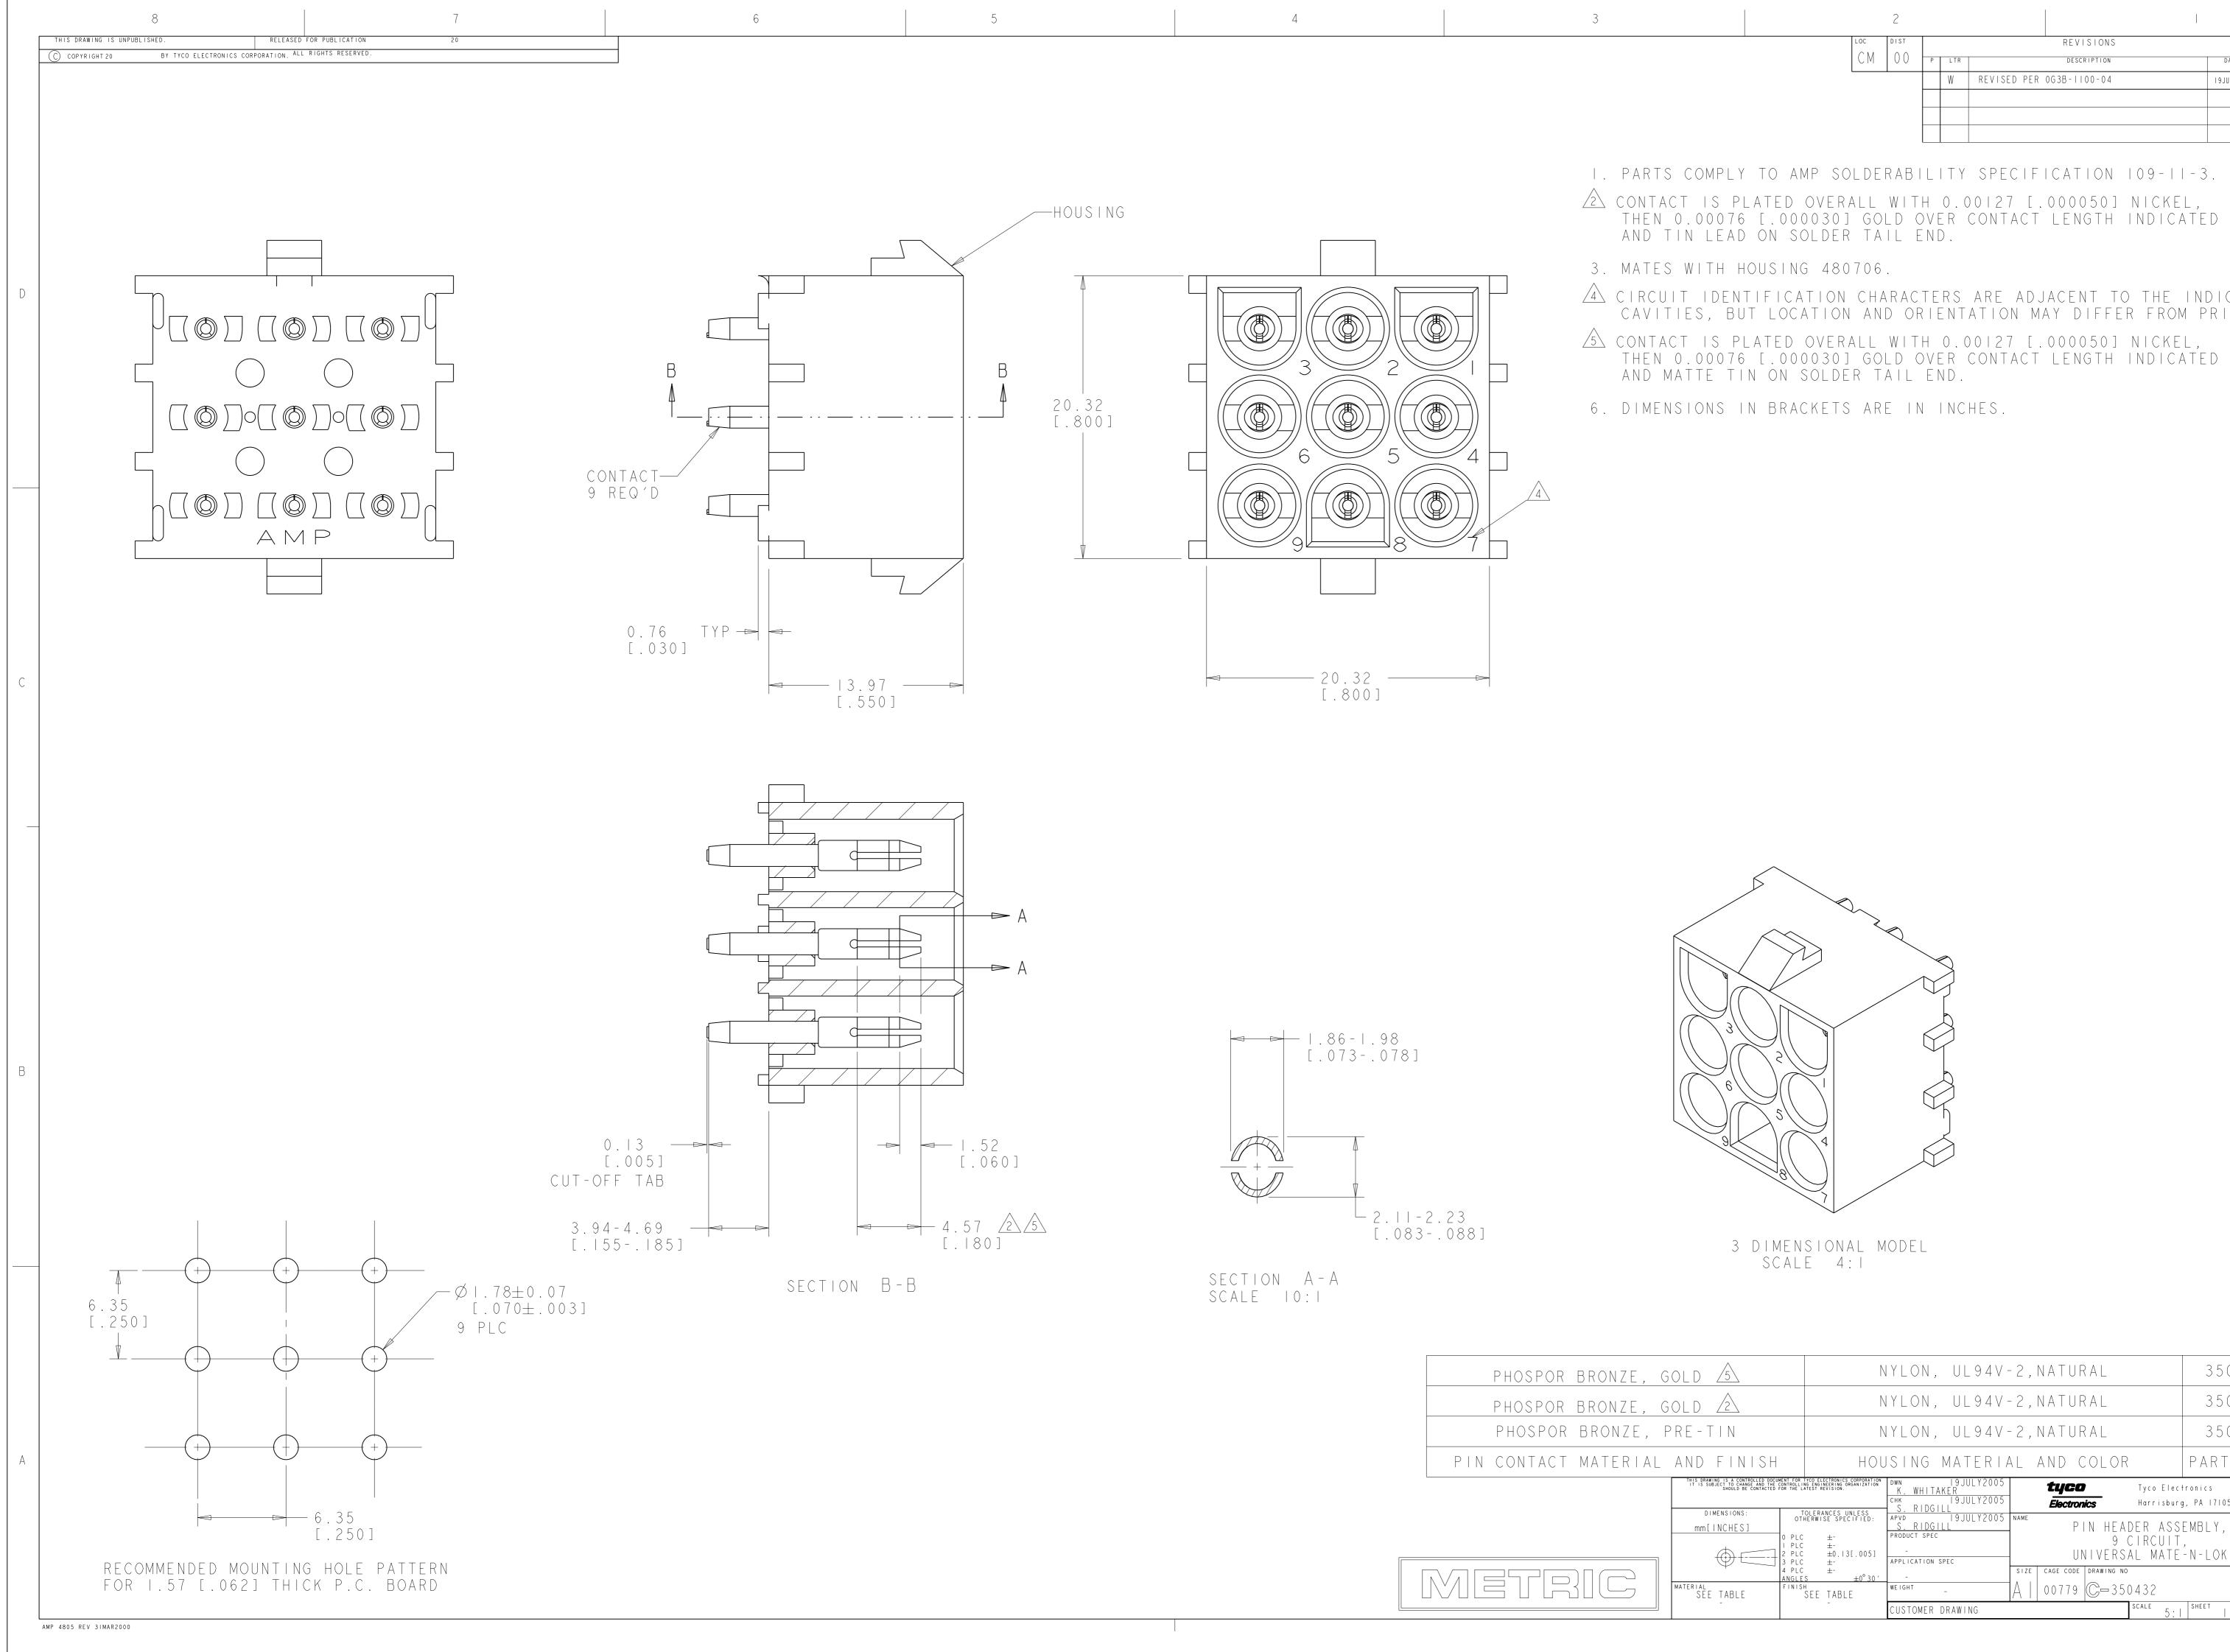

	2				I		
Loc C M	DIST 00	P	LTR	REVISION		DWN	APVD
			W	REVISED PER 0G3B-1100-04	19JULY05	ΚW	SR

I. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3. CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND TIN LEAD ON SOLDER TAIL END.

A CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

	Ν	YLON, UL94V-	-2,NATUF	RAL		350	432	- 4
	Ν	YLON, UL94V-	-2,NATUF	RAL		350	432	- 2
	Ν	YLON, UL94V-	-2,NATUF	RAL		350	432	-
NISH	HOU	SING MATERIA	AL AND C	COLOR		PART	NUN	MBER
DNTROLLED DOCUMENT FOR TYCO HANGE AND THE CONTROLLING ED BE CONTACTED FOR THE LATEST S: TOLE	ELECTRONICS CORPORATION NOINEERING ORGANIZATION T REVISION. ERANCES UNLESS WISE SPECIFIED:	DWN 19JULY2005 K. WHITAKER CHK 19JULY2005 S. RIDGILL	Électron		Tyco Elect Harrisburg	ronics , PA 17105-	-3608	
0 PLC 0 PLC 2 PLC 3 PLC	wise specified: ±- ±- ±0.13[.005] ±-	APVD 19JULY2005 S. RIDGILL PRODUCT SPEC - APPLICATION SPEC		9 (DER ASSE CIRCUIT AL MATE	,	ΤM	
4 PLC ANGLES FINISH	±- ±0°30′ E TABLE		size cage code	drawing no			RES	STRICTED TO -
	-	CUSTOMER DRAWING	/ x 1		scale 5:1	SHEET	OF	^{rev} W

В