Distributed by:

JAMECO

ELECTRONICS

www.Jameco.com + 1-800-831-4242


The content and copyrights of the attached material are the property of its owner.


Jameco Part Number 1931675

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - - .

CM 00 PUTCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

D REVISION PER ECO-07-003729 26FEB07 KW DB

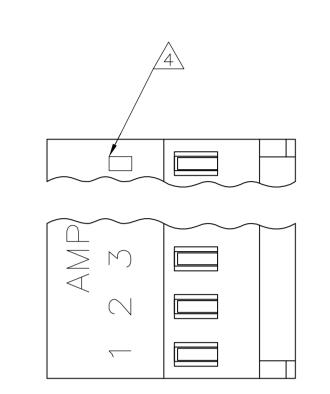

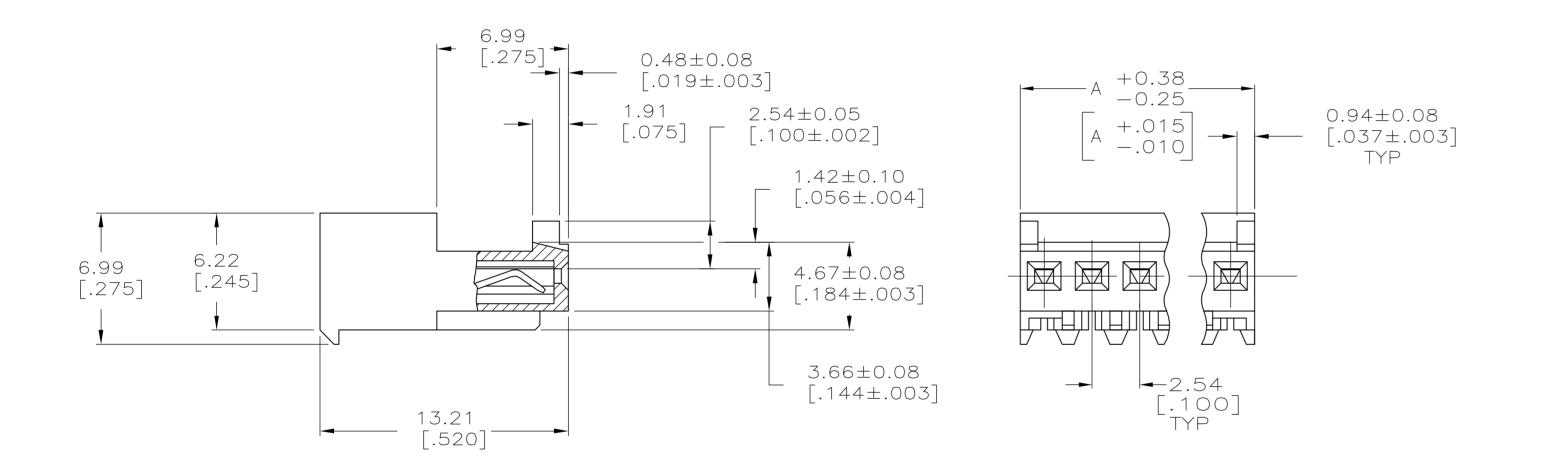

MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).

CONTACTS - 0.30[.012] THICK COPPER ALLOY

.000076[.000030] GOLD IN CONTACT AREA WITH

BRIGHT TIN-LEAD SLOT AREA FOR 644042-2 THRU 2-644042-8

OR MATTE WHISKER MITIGATED TIN FOR 3-644042-2 THRU
5-644042-8 OVER NICKEL UNDERPLATE.

- 2. CONTACTS ACCEPT 22 AWG WIRE WITH 1.52 [.060] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

1 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5. DIMENSIONS IN BRACKETS ARE IN INCHES.

AMP 4805 REV 31MAR2000

6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP AND WITH POLARIZING TAB.

	71.12 [2.800]	28	5-644042-8
	68.58 [2.700]	27	5-644042-7
	66.04 [2.600]	26	5-644042-6
	63.50 [2.500]	25	5-644042-5
	60.96 [2.400]	24	5-644042-4
	58.42 [2.300]	23	5-644042-3
	55.88 [2.200]	22	5-644042-2
	53.34 [2.100]	21	5-644042-1
	50.80 [2.000]	20	5-644042-0
	48.26 [1.900]	19	4-644042-9
	45.72 [1.800]	18	4-644042-8
	43.18 [1.700]	17	4-644042-7
	40.64 [1.600]	16	4-644042-6
	38.10 [1.500]	15	4-644042-5
	35.56 [1.400]	14	4-644042-4
	33.02 [1.300]	13	4-644042-3
	30.48 [1.200]	12	4-644042-2
	27.94 [1.100]	11	4-644042-1
	25.40 [1.000]	10	4-644042-0
	22.86 [.900]	9	3-644042-9
	20.32 [.800]	8	3-644042-8
	17.78 [.700]	7	3-644042-7
	15.24 [.600]	6	3-644042-6
	12.70 [.500]	5	3-644042-5
	10.16 [.400]	4	3-644042-4
	7.62 [.300]	3	3-644042-3
	5.08 [.200]	2	3-644042-2
	DIM A	NO.OF POSN	ASSEMBLY

	71.12 [2.800]	28	2-644042-8
	68.58 [2.700]	27	2-644042-7
	66.04 [2.600]	26	2-644042-6
	63.50 [2.500]	25	2-644042-5
	60.96 [2.400]	24	2-644042-4
	58.42 [2.300]	23	2-644042-3
	55.88 [2.200]	22	2-644042-2
	53.34 [2.100]	21	2-644042-1
	50.80 [2.000]	20	2-644042-0
	48.26 [1.900]	19	1-644042-9
	45.72 [1.800]	18	1-644042-8
	43.18 [1.700]	17	1-644042-7
	40.64 [1.600]	16	1-644042-6
7	38.10 [1.500]	15	1-644042-5
	35.56 [1.400]	14	1-644042-4
	33.02 [1.300]	13	1-644042-3
	30.48 [1.200]	12	1-644042-2
	27.94 [1.100]	11	1-644042-1
	25.40 [1.000]	10	1-644042-0
	22.86 [.900]	9	644042-9
	20.32 [.800]	00	644042-8
	17.78 [.700]	7	644042-7
	15.24 [.600]	6	644042-6
	12.70 [.500]	5	644042-5
	10.16 [.400]	4	644042-4
	7.62 [.300]	3	644042-3
	5.08 [.200]	2	644042-2
	DIM A	NO.OF POSN	ASSEMBLY

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN S. HOOVER	28-DEC-2004	te	jco		Tyco Electron	ics Corpo	ration	
DIMENSIONS: TOLERANCES UNLESS			CHK D. BOSSI	28-DEC-2004	Ē	ectronics		Harrisburg, P	a 17105—	-3608	
mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI	28-DEC-2004	NAME MTA 100			CONNECTOR ASSEMBLY			
•	0 PLC ± 1 PLC ± 2 PLC ± 0.13 [.005] 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC 108-1050 APPLICATION SPEC					22 AWG, STANDARD				
T -		114-10)19	SIZE		DRAWING NO				RESTRICTED TO	
MATERIAL	FINISH 1	WEIGHT		A1	00779	C -64	14042				
<u> </u>		CUSTOMER	DRAWING				SCALE 5:1	SHEET	1 OF 1	1 REV D	