



SO DIMM Sockets (Continued)



Dual Read-Out for SDRAM Memory Modules

144 Positions — 0.8 mm SO DIMM

Material and Finish

Housing — Nylon, UL94V-0 rated; color: natural

Contact — Phosphor bronze with 0.00025 mm [.0000398 in.] min. thick gold over 0.001 mm [.0000393 in.] min. thick nickel in contact area and gold flash over 0.001 mm [.0000393 in.] min. thick nickel in soldering area.

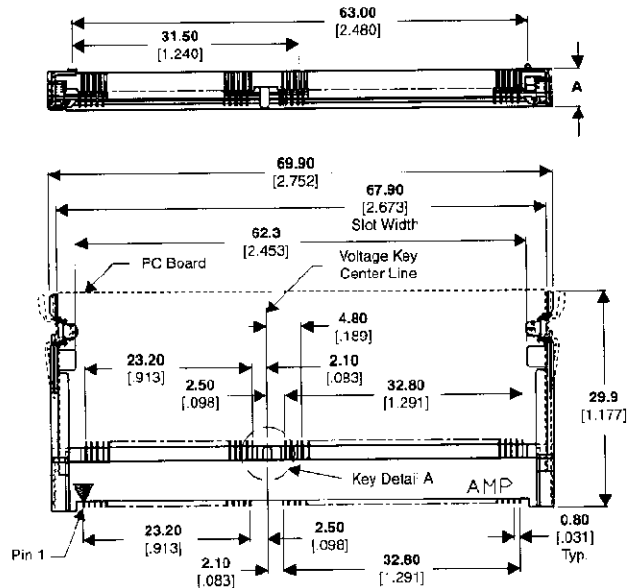

Key Type A

Housing Style	Dimension A	Power Supply: 3.3 Volt Key Type A
Standard	5.20 .205	390113-1
Low-Profile	4.00 .157	390114-1
High-Profile	5.60 .220	390112-1
Ultra-High	9.90 .390	390322-1

Sockets

Memory Sockets