

HEADERS & RECEPTACLES







PRODUCT DRAWING



3D PDF

TE CONNECTIVITY (TE) 2.0mm, HDR, 4pos, Vertical HPI | HDR

440054-4

TE Internal Number: 440054-4

Always EU RoHS/ELV Compliant

Centerline 2 mm [.079 in]

Number of Positions 4

PCB Mounting Orientation Vertical

PCB Mounting Style Through Hole

Number of Rows 1

2.0 MM PITCH HPI VERTICAL POST HEADERS **Product Drawings**

PDF **English**

CAD Files Customer View Model

2D_DXF.ZIP English

3D PDF

PDF **3D**

Customer View Model

3D_IGS.ZIP English

Customer View Model

3D STP.ZIP English

Product Specifications

Product Specification Metric Interconnect System (Restricted To Sony Corporation)

PDF **English**

AMP 2.0MM PITCH HPI WIRE-TO-BOARD SYSTEM.

PDF **English**

Qualification Test Report AMP 2.0MM PITCH HPI WIRE-TO-BOARD SYSTEM.

PDF English

Product Environmental Compliance

TE Material Declaration MD_440054-4_05032014522_dmtec

> PDF English


J ,

Product Type Features	PCB Mounting Orientation	Vertical
	Product Type	Connector
	Connector Type	Header
	Connector System	Wire-to-Board
	Wire/Cable Type	Discrete Wire
	Sealed	No
	Connector Style	Plug
	Applies To	Printed Circuit Board
Configuration Features	Number of Positions	4
	Number of Rows	1
	Tail Orientation	Straight
	Backwall/Post Interruptions	Without
Electrical Characteristics	Operating Voltage	250 VAC [250 VDC]
Body Features	Header Type	Partially Shrouded
	Post Material	Brass
	Post Plating Material	Tin
Contact Features	Contact Mating Area Plating Material	Tin
	Contact Style	Straight
	Contact Shape	Square
	Contact Termination Area Plating Material	Tin
	Contact Type	Pin
	Contact Plating Material	Tin
	Contact Plating Material Finish	Bright
	Contact Current Rating (A)	3
	Contact Base Material	Brass
Termination Features	Contact Termination Type	Through Hole
	Termination Post Length	.134 in, 3.4 mm
	Termination Method to PC Board	Through Hole
Mechanical Attachment	PCB Mounting Style	Through Hole

	PCB Mount Alignment	Without
	Mating Retention	Without
	PCB Mount Retention	With
	PCB Mount Retention Type	Kinked Tines
	Contact Retention	With
	Contact Retention Type	Locking Lance
Housing Features	Centerline	2 mm [.079 in]
	Housing Color	Natural
	Housing Material	Nylon 66 GF
Dimensions	Tail Length	3.4 mm [.134 in]
	Mating Post Length	3.35 mm [.131 in]
	PCB Thickness (Recommended)	1 – 1.6 mm [.039 – .063 in]
	Height	6.05 mm [.238 in]
	Wire/Cable Size (AWG)	30 – 24
	Width	4.7 mm [.185 in]
	Insulation Diameter	.9 mm [.0354 – .059 in]
	Length	10 mm [.393 in]
Usage Conditions	Operating Temperature Range	-25 – 85 °C [-13 – 185 °F]
Operation/Application	For Use With	440129-x
	Pick and Place Cover	Without
Industry Standards	UL Flammability Rating	UL 94V-0
Packaging Features	Packaging Method	Bag
. as.agmg i catares		300
	Packaging Quantity	300
Product Compliance	Statement of Compliance	
the second secon	PDF	

CUSTOMERS ALSO BOUGHT

VIEW ALL PRODUCT COMPLIANCE

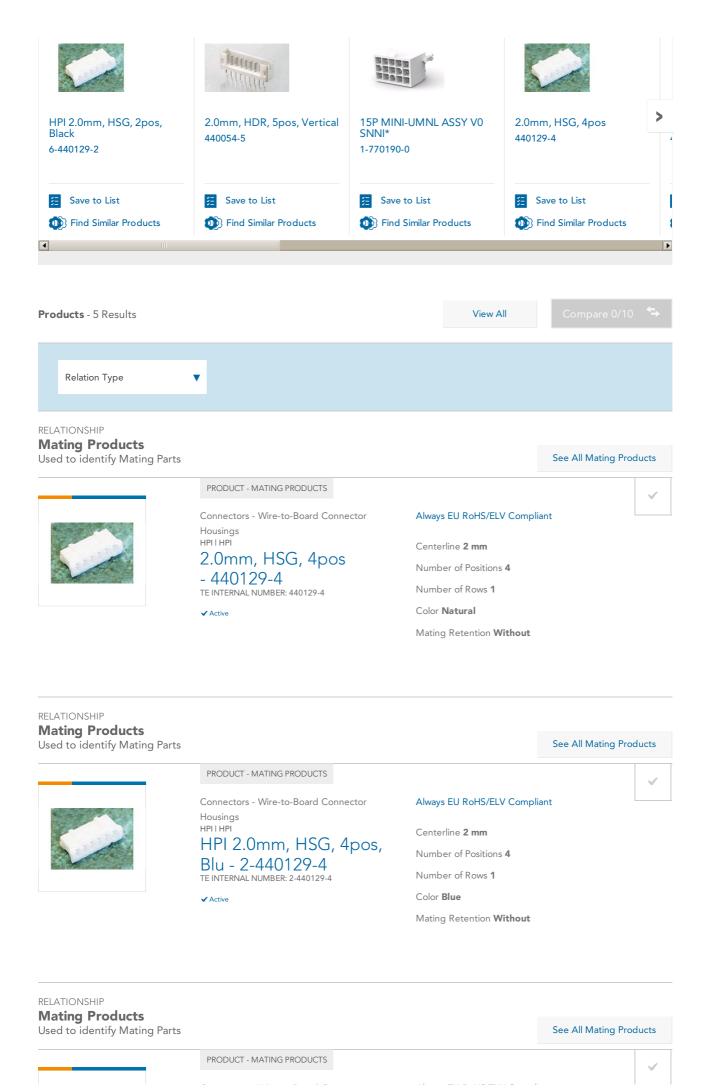



Connectors - Wire-to-Board Connector
Housings
HPITHPI
HPI 2.0mm, HSG, 4pos,
Black - 6-440129-4
TE INTERNAL NUMBER: 6-440129-4

✓ Active

Always EU RoHS/ELV Compliant

Centerline 2 mm

Number of Positions 4

Number of Rows 1

Color Black

Mating Retention Without