


0.025" [0.64mm] Centerline PVC IDC Ribbon Cable

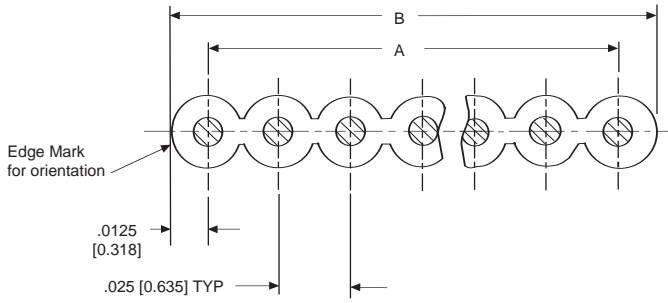

Product Specifications

- ▲ Insulation: PVC
- ▲ Voltage Rating: 150 Volts
- ▲ UL Recognized: AWM Style 2678
- ▲ CSA Certification: AWM 1A FTI

**Electrical Specifications
30 AWG Solid Bare Copper**

- ▲ Impedance (Ohms): 80
- ▲ Capacitance (pf/ft): 23.0
- ▲ Crosstalk:
 - ▲ Near End: 4.0%
 - Far End: 6.0%
- ▲ Propagation Delay ns/ft: 1.51

30 AWG 7/38 Tin Plated Copper

- ▲ Impedance (Ohms): 70
- ▲ Capacitance (pf/ft): 22.0
- ▲ Crosstalk:
 - ▲ Near End: 5.2%
 - Far End: 6.9%
- ▲ Propagation Delay ns/ft: 1.55

No. of Cond.	Dimensions		Roll Length	Part Number	Spec Number
	A	B			
30 AWG Solid Bare Copper - 0.025 [.64]					
20	0.475 [12.07]	0.500 [12.70]	100 ft.	1-57013-3	100-4136
40	0.975 [24.77]	1.000 [25.40]	100 ft.	1-57013-7	100-4136
50	1.225 [31.12]	1.250 [31.75]	100 ft.	1-57013-9	100-4136
68	1.675 [42.55]	1.700 [43.18]	100 ft.	2-57013-1	100-4136
80	1.975 [50.17]	2.000 [50.80]	100 ft.	2-57013-3	100-4136
100	2.475 [62.87]	2.500 [63.50]	100 ft.	2-57013-4	100-4136
20	0.475 [12.07]	0.500 [12.70]	500 ft.	57013-1	100-4136
40	0.975 [24.77]	1.000 [25.40]	500 ft.	57013-2	100-4136
50	1.225 [31.12]	1.250 [31.75]	500 ft.	1-57013-0	100-4136
68	1.675 [42.55]	1.700 [43.18]	500 ft.	1-57013-1	100-4136
80	1.975 [50.17]	2.000 [50.80]	500 ft.	57013-4	100-4136
100	2.475 [62.87]	2.500 [63.50]	500 ft.	57013-5	100-4136
30 AWG 7/38 Tin Plated Copper - 0.025 [.64]					
20	0.475 [12.07]	0.500 [12.70]	100 ft.	1-57131-3	100-7147
40	0.975 [24.77]	1.000 [25.40]	100 ft.	1-57131-7	100-7147
50	1.225 [31.12]	1.250 [31.75]	100 ft.	1-57131-9	100-7147
68	1.675 [42.55]	1.700 [43.18]	100 ft.	2-57131-1	100-7147
80	1.975 [50.17]	2.000 [50.80]	100 ft.	2-57131-3	100-7147
100	2.475 [62.87]	2.500 [63.50]	100 ft.	2-57131-4	100-7147
20	0.475 [12.07]	0.500 [12.70]	500 ft.	57131-1	100-7147
40	0.975 [24.77]	1.000 [25.40]	500 ft.	57131-2	100-7147
50	1.225 [31.12]	1.250 [31.75]	500 ft.	1-57131-0	100-7147
68	1.675 [42.55]	1.700 [43.18]	500 ft.	1-57131-1	100-7147
80	1.975 [50.17]	2.000 [50.80]	500 ft.	57131-4	100-7147
100	2.475 [62.87]	2.500 [63.50]	500 ft.	57131-5	100-7147

Other Conductor Counts Available on Request.

Standard Flat Ribbon Cables