

## MULTIPLE CONFIGURATION PCB HEADERS & RECEPTACLES





✓ Active



PRODUCT DRAWING



3D PDF

TE CONNECTIVITY (TE)

## 08 MODII HDR SRRA SHRD LF

AMPMODU | AMPMODU Headers

5-103361-6

TE Internal Number: 5-103361-6

Always EU RoHS/ELV Compliant

Applies To Printed Circuit Board

Connector Style Plug

Centerline **2.54 mm [.1 in ]** 

Number of Positions 8

Header Type Shrouded

Product Drawings HEADER ASSEMBLY, MOD II, SINGLE ROW .100 CL, RIGHT ANGLE

PDF **English** 

CAD Files Customer View Model

2D\_DXF.ZIP English

3D PDF

3**D** 

**Customer View Model** 

3D\_IGS.ZIP **English** 

Customer View Model

3D\_STP.ZIP English

Catalog Pages/Data Sheets AMPMODU\_INTERCONNECTION\_SYSTEM\_SECTION5

PDF **English** 

Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features Applies To Printed Circuit Board

Connector Style Plug

PCB Mounting Orientation Right Angle


Connector Type **Header** 

Row-to-Row Spacing 2.54 mm [.1 in]

	Stabilizers	Without
	Strain Relief	Without
	Board Standoff	With
	Profile	Standard
	Product Type	Connector
	Gasket	Without
Configuration Features	Number of Positions	8
	Number of Rows	1
	Keyed	No
	Selectively Loaded	No
Electrical Characteristics	Dielectric Withstanding Voltage	750 Vrms
Body Features	Header Type	Shrouded
	Post Size	.64 mm [ .025 in ]
Contact Features	Contact Protection	With
	Contact Shape	Square
	Contact Type	Pin
	Contact Base Material	Phosphor Bronze
	Contact Mating Area Plating Thickness (µin)	30
	Solder Tail Contact Plating Material	Tin over Nickel
	Contact Mating Area Plating Material	Gold
	Contact Protection Type	Shrouded
	Contact Current Rating (A)	3
Termination Features	Termination Post Length	2.79 mm [ .11 in ]
	Termination End Plating Thickness (µin)	100 – 200
	Termination End Plating Material	Tin Over Nickel
	Termination Method to PC Board	Through Hole
Mechanical Attachment	PCB Mounting Style	Through Hole
	PCB Mount Retention	Without
	Panel Mount Retention	Without
	Mating Alignment	With
	aang / agament	

	Mating Connector Lock	Without
	Mating Alignment Type	Polarization
Housing Features	Centerline	2.54 mm [ .1 in ]
	Housing Color	Black
	Housing Material	Thermoplastic
	Housing Style	4-Sided
Dimensions	Shrouded End Dimension	1.778 mm [ .07 in ]
	PCB Thickness (Recommended)	1.397 mm [ .055 in ]
	Mating Post Length	6.1 mm [ .24 in ]
Usage Conditions	Operating Temperature Range (°C)	-65 – 105
	High Temperature Housing	No
Operation/Application	High Speed Serial Data Connector	No
Industry Standards	UL Flammability Rating	UL 94V-0
	Approved Standards	CSA LR7189, UL E28476
Packaging Features	Packaging Quantity	23
	Packaging Method	Tube
Product Compliance	Statement of Compliance	

## **CUSTOMERS ALSO BOUGHT**

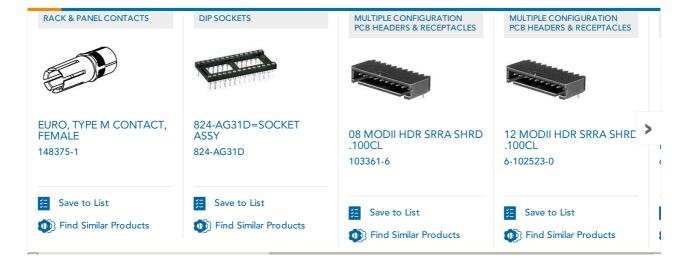

VIEW ALL PRODUCT COMPLIANCE

