

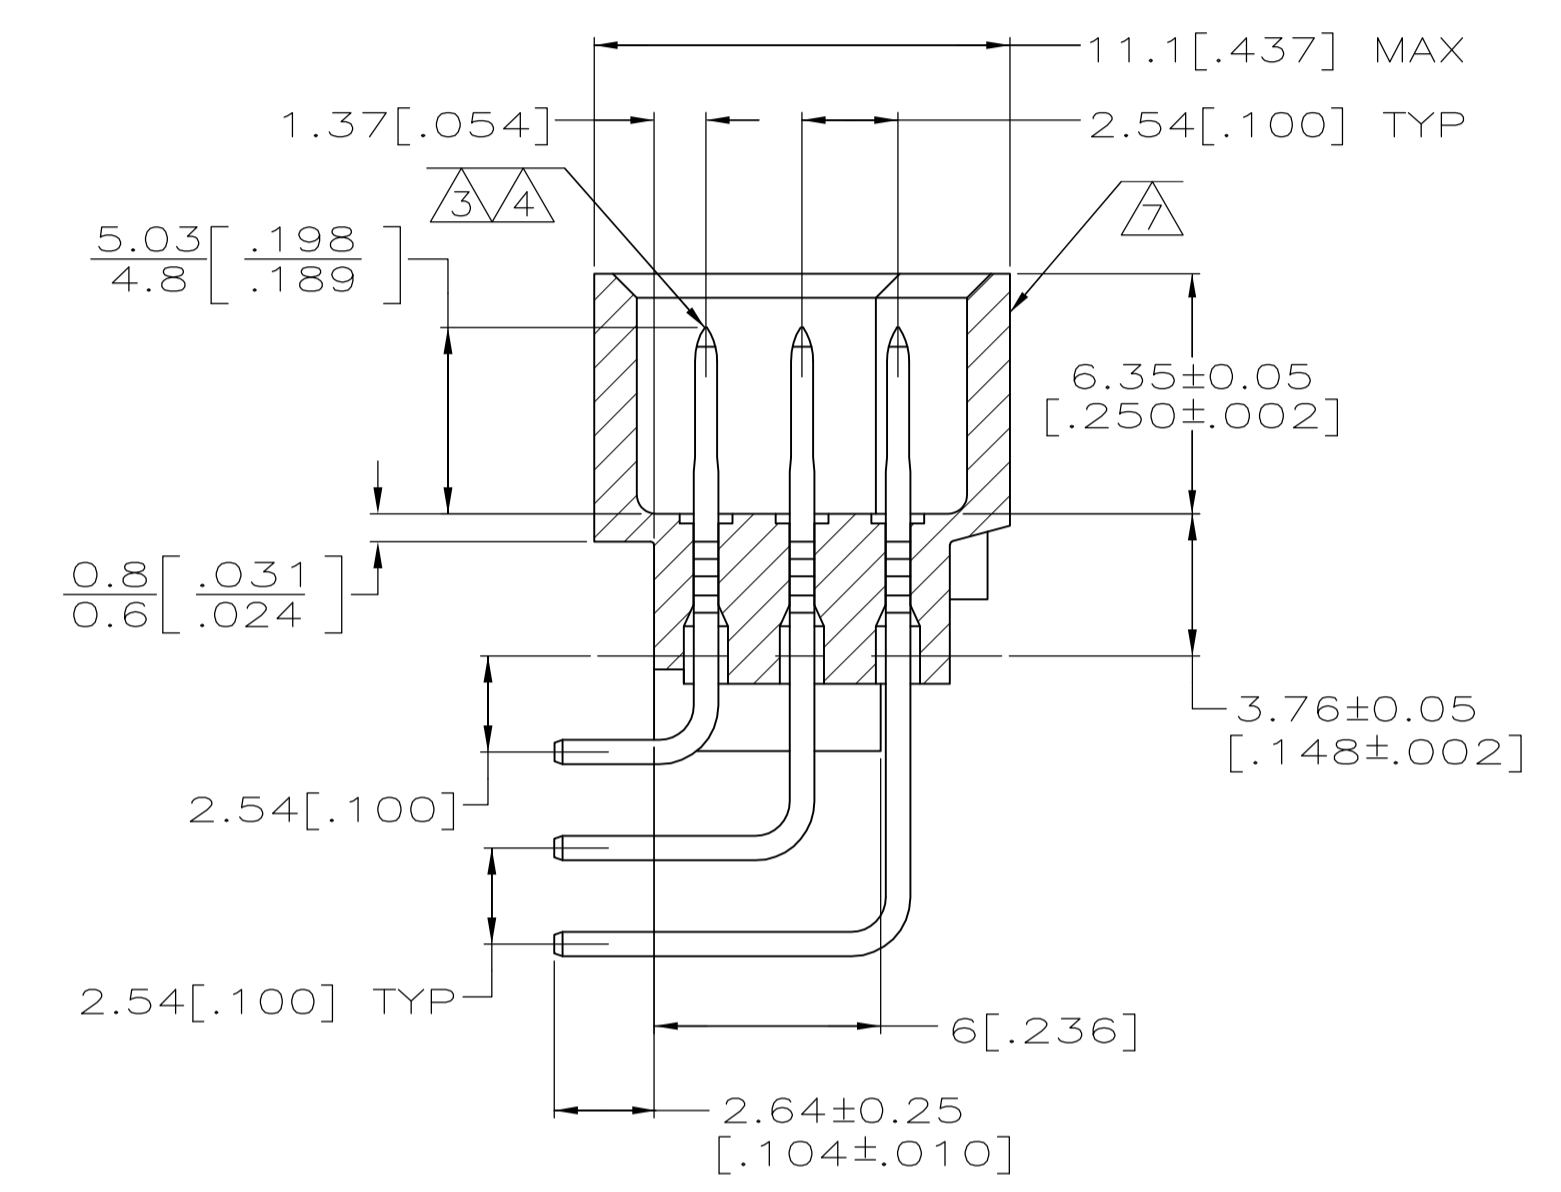
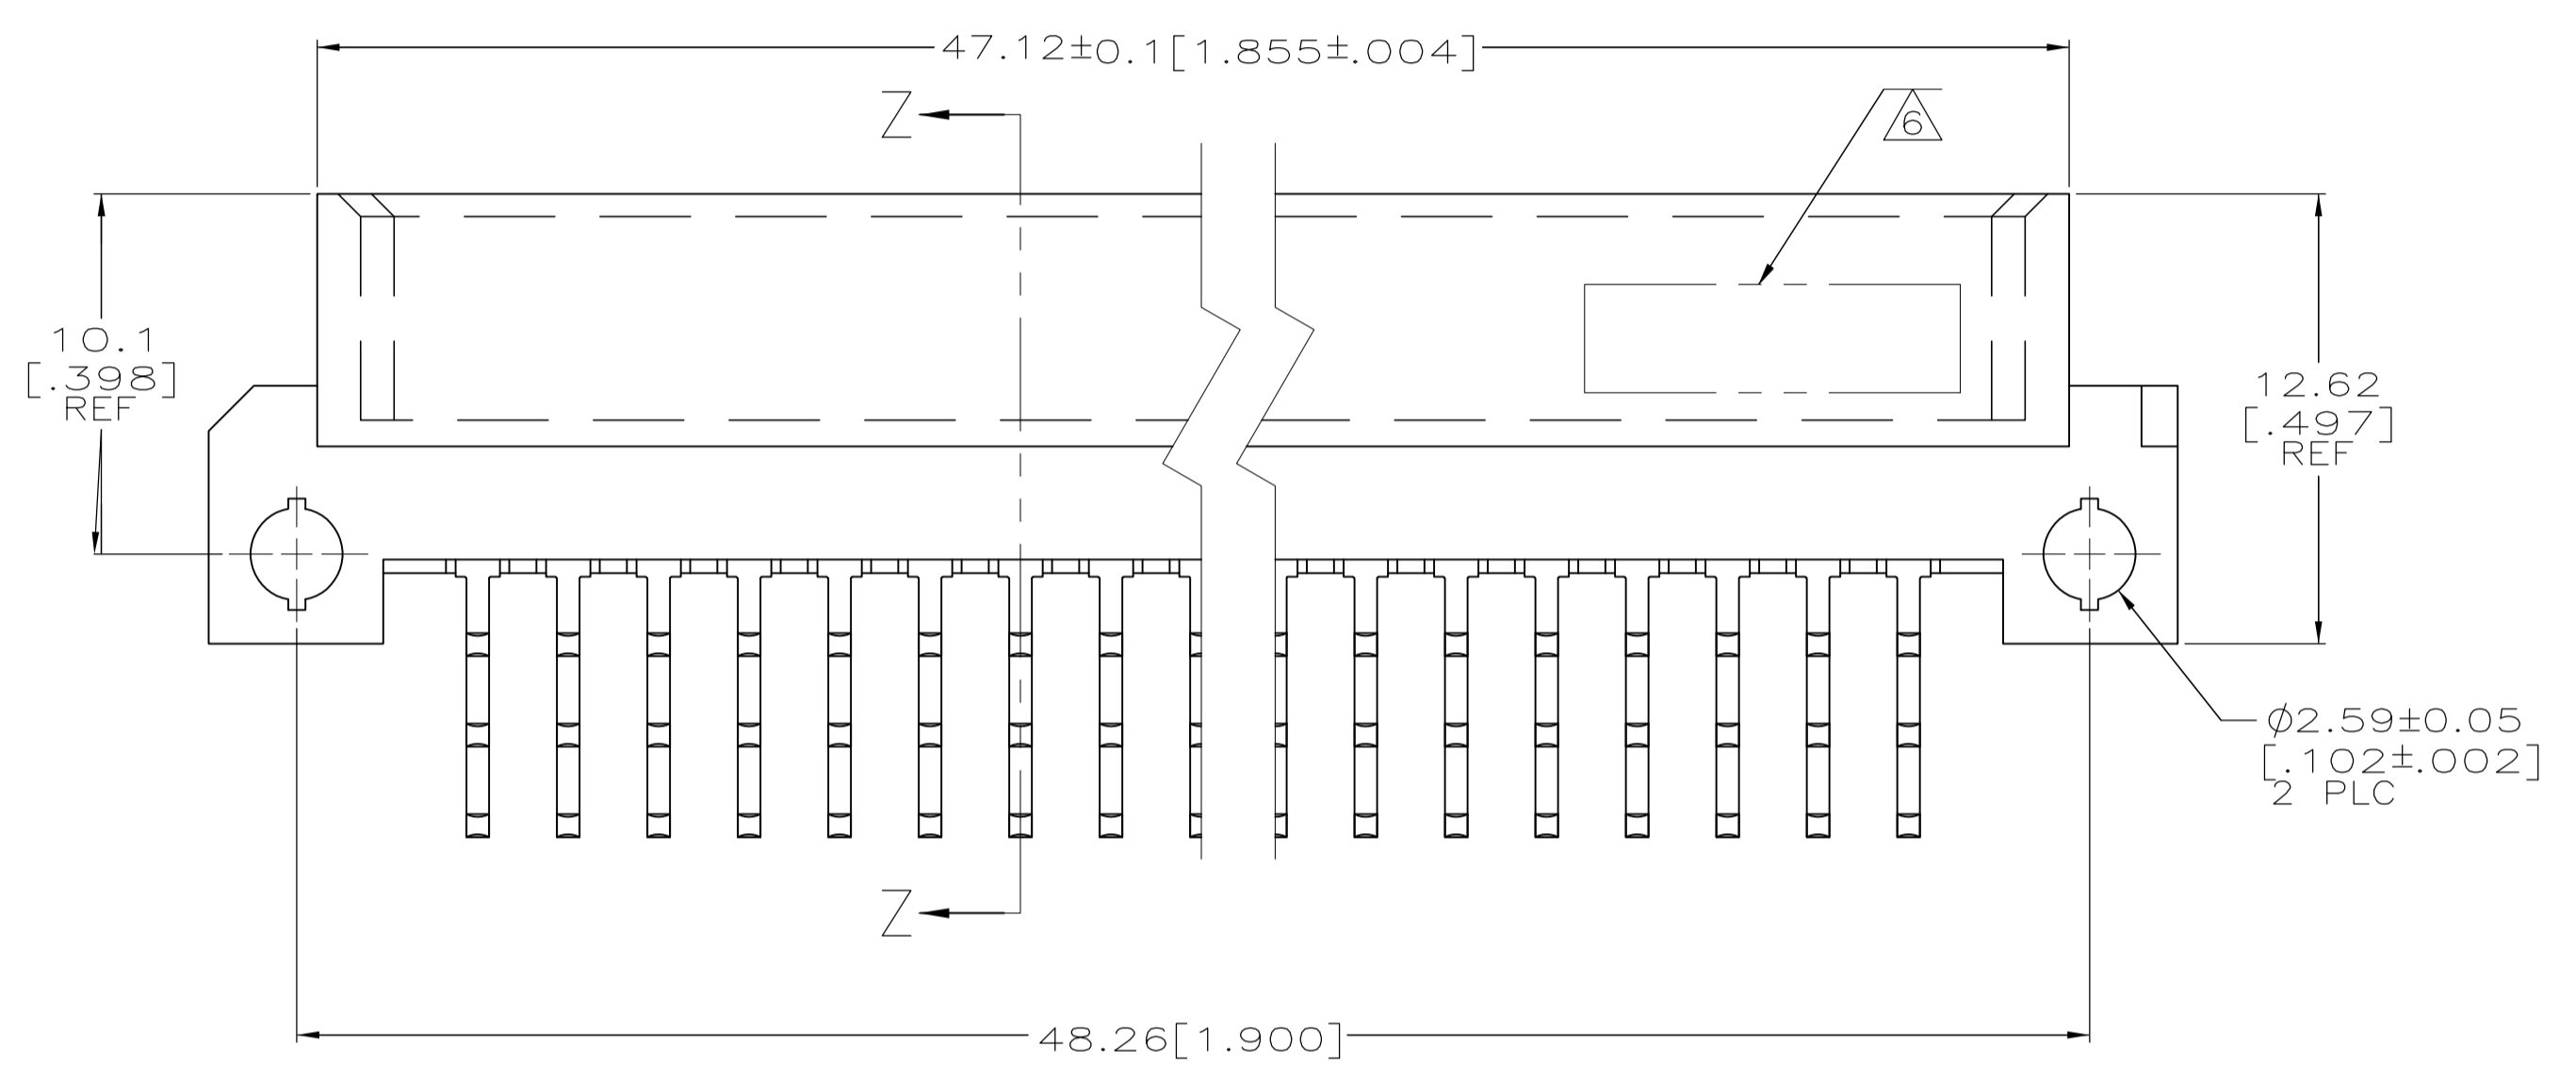


- ① HOUSING MATERIAL: GLASS-FILLED POLYMER.
- ② POST MATERIAL: COPPER ALLOY.
- ③ POST FINISH: DIN 41612 CLASS 3 IN CONTACT AREA. TIN PLATE ON POSTS.
- ④ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- ⑤ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- ⑥ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- ⑦ MARKING ON THIS SIDE.
- ⑧ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

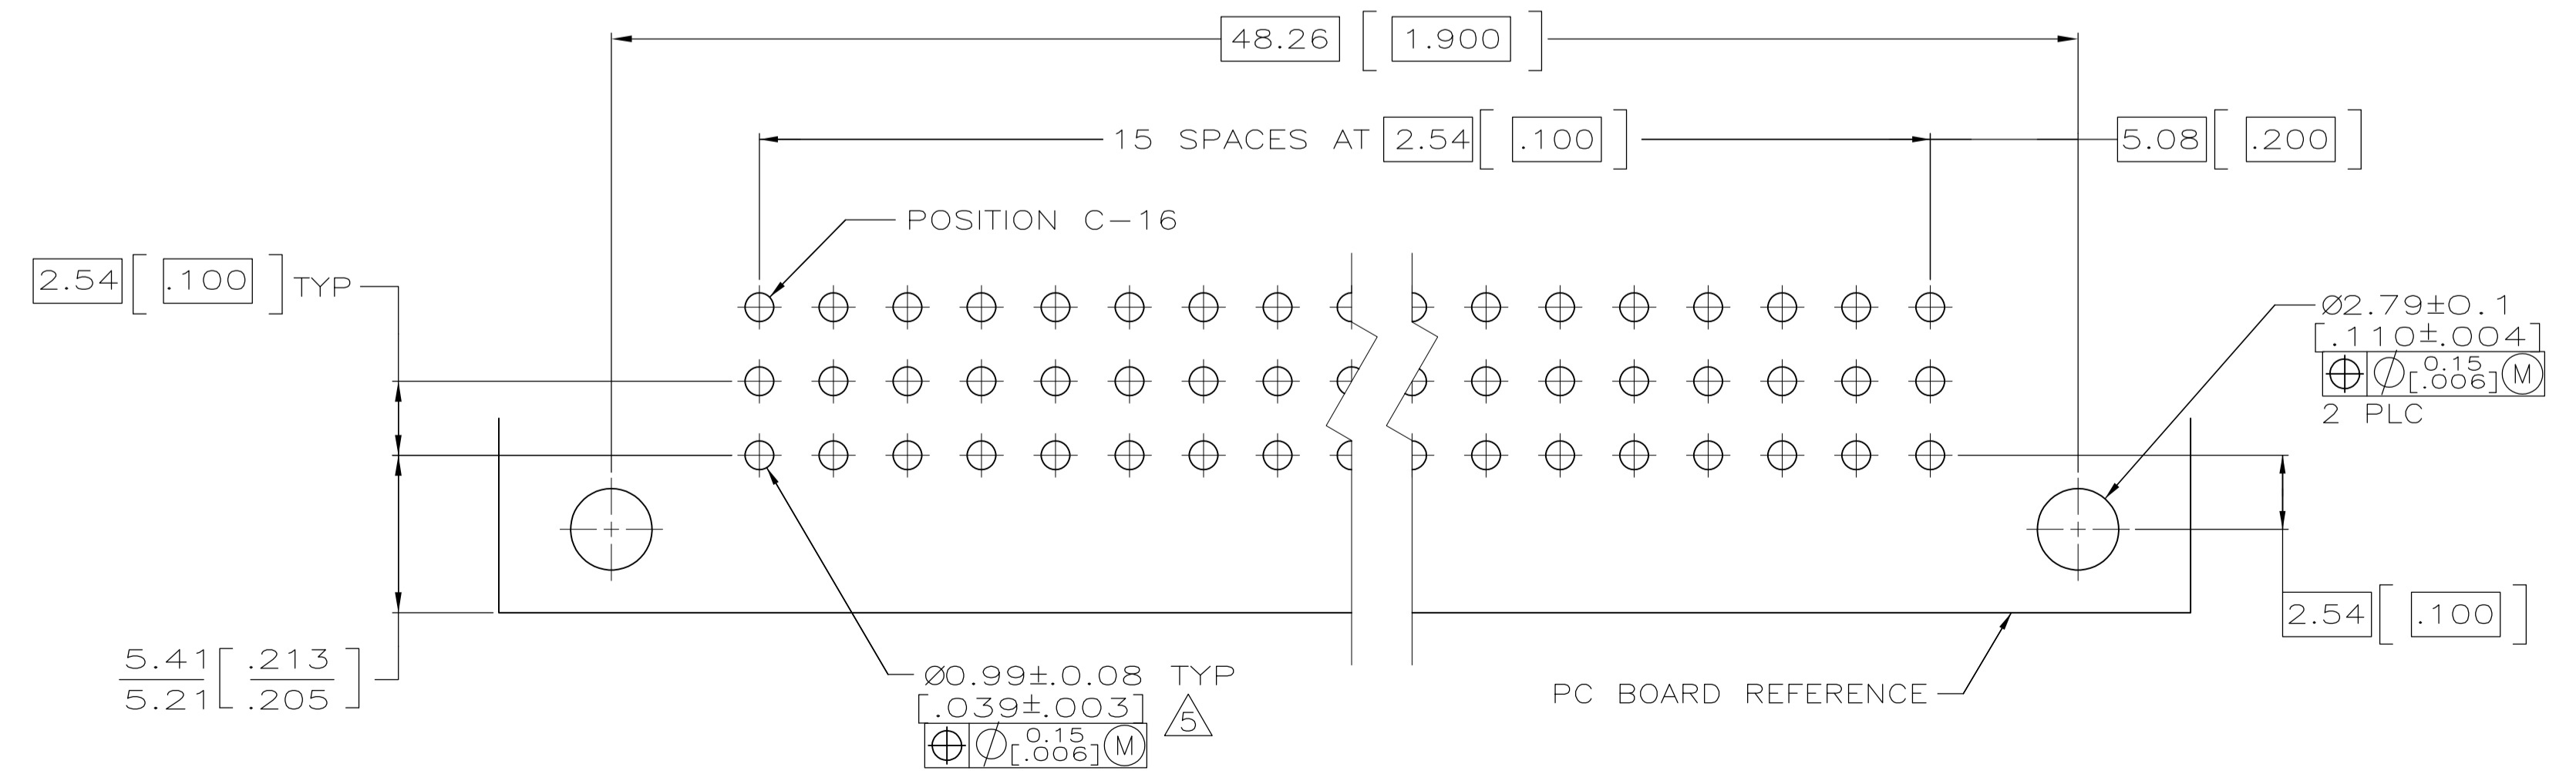

SECTION Z-Z

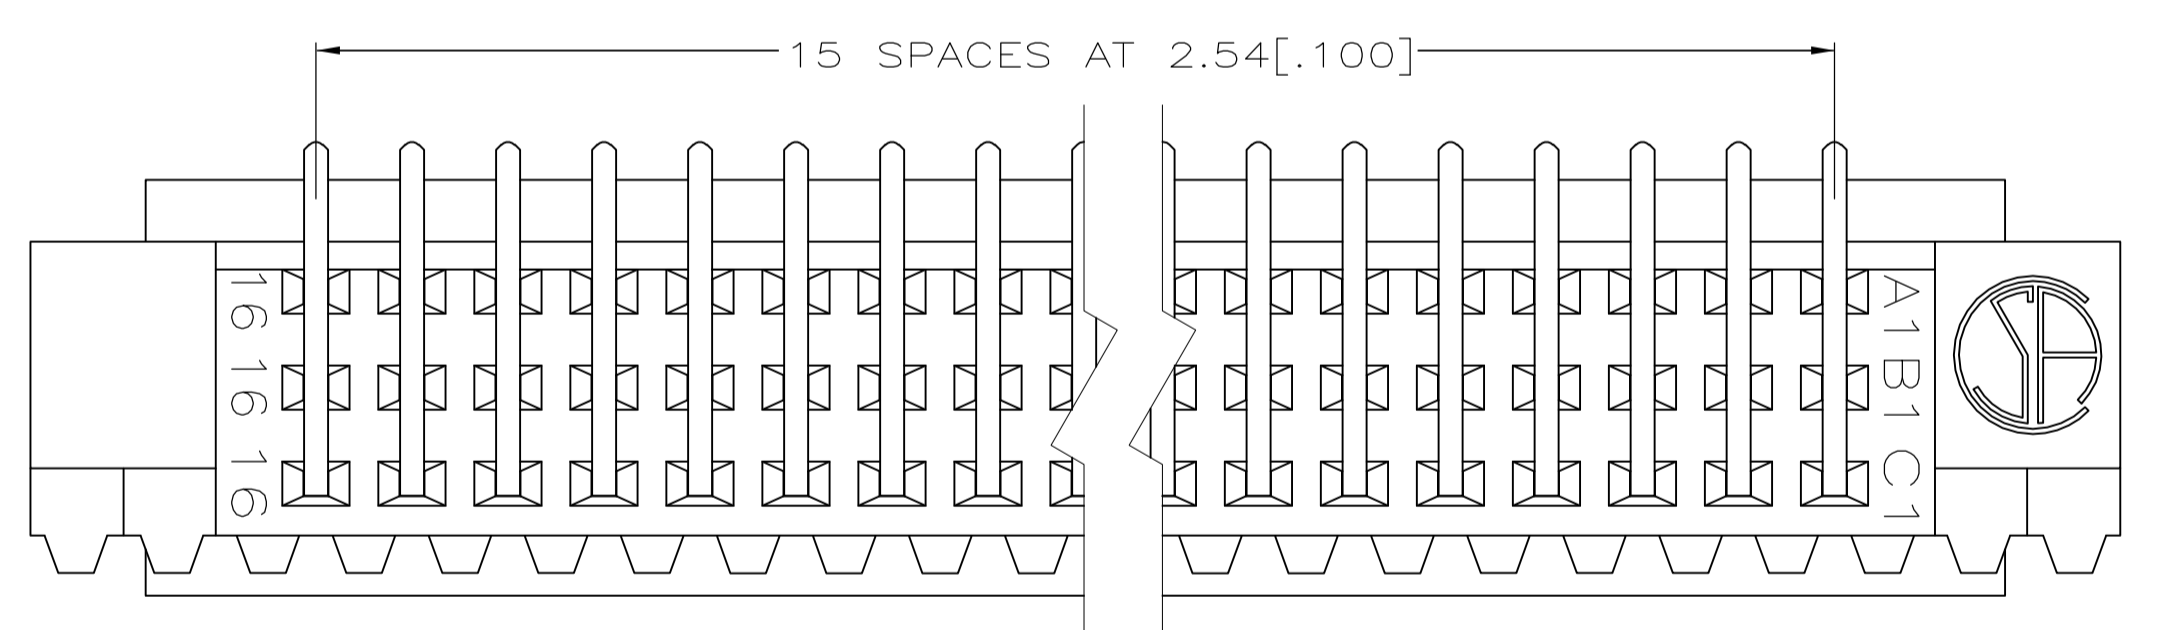

PC BOARD LAYOUT

⑧ OBSOLETE	⑤	1-16	X	X	X	48	-5650478-9-
		1-16	X	X	X	48	5650478-5
NOTES		POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER
		ROWS LOADED					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE	OSMAYOS	TE Connectivity
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		OSMAYOS	OSMAYOS	
MATERIAL	FINISH	APVD A. SHARPE	OSMAYOS	NAME
		PRODUCT SPEC		ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, 48 POSITION, 2.64[.104] SOLDER POST
		APPLICATION SPEC		SIZE
		WEIGHT		CAGE CODE
				DRAWING NO
				RESTRICTED TO
				A1 00779 C=5650478
				CUSTOMER DRAWING
				SCALE 5:1 SHEET 1 OF 1 REV P