
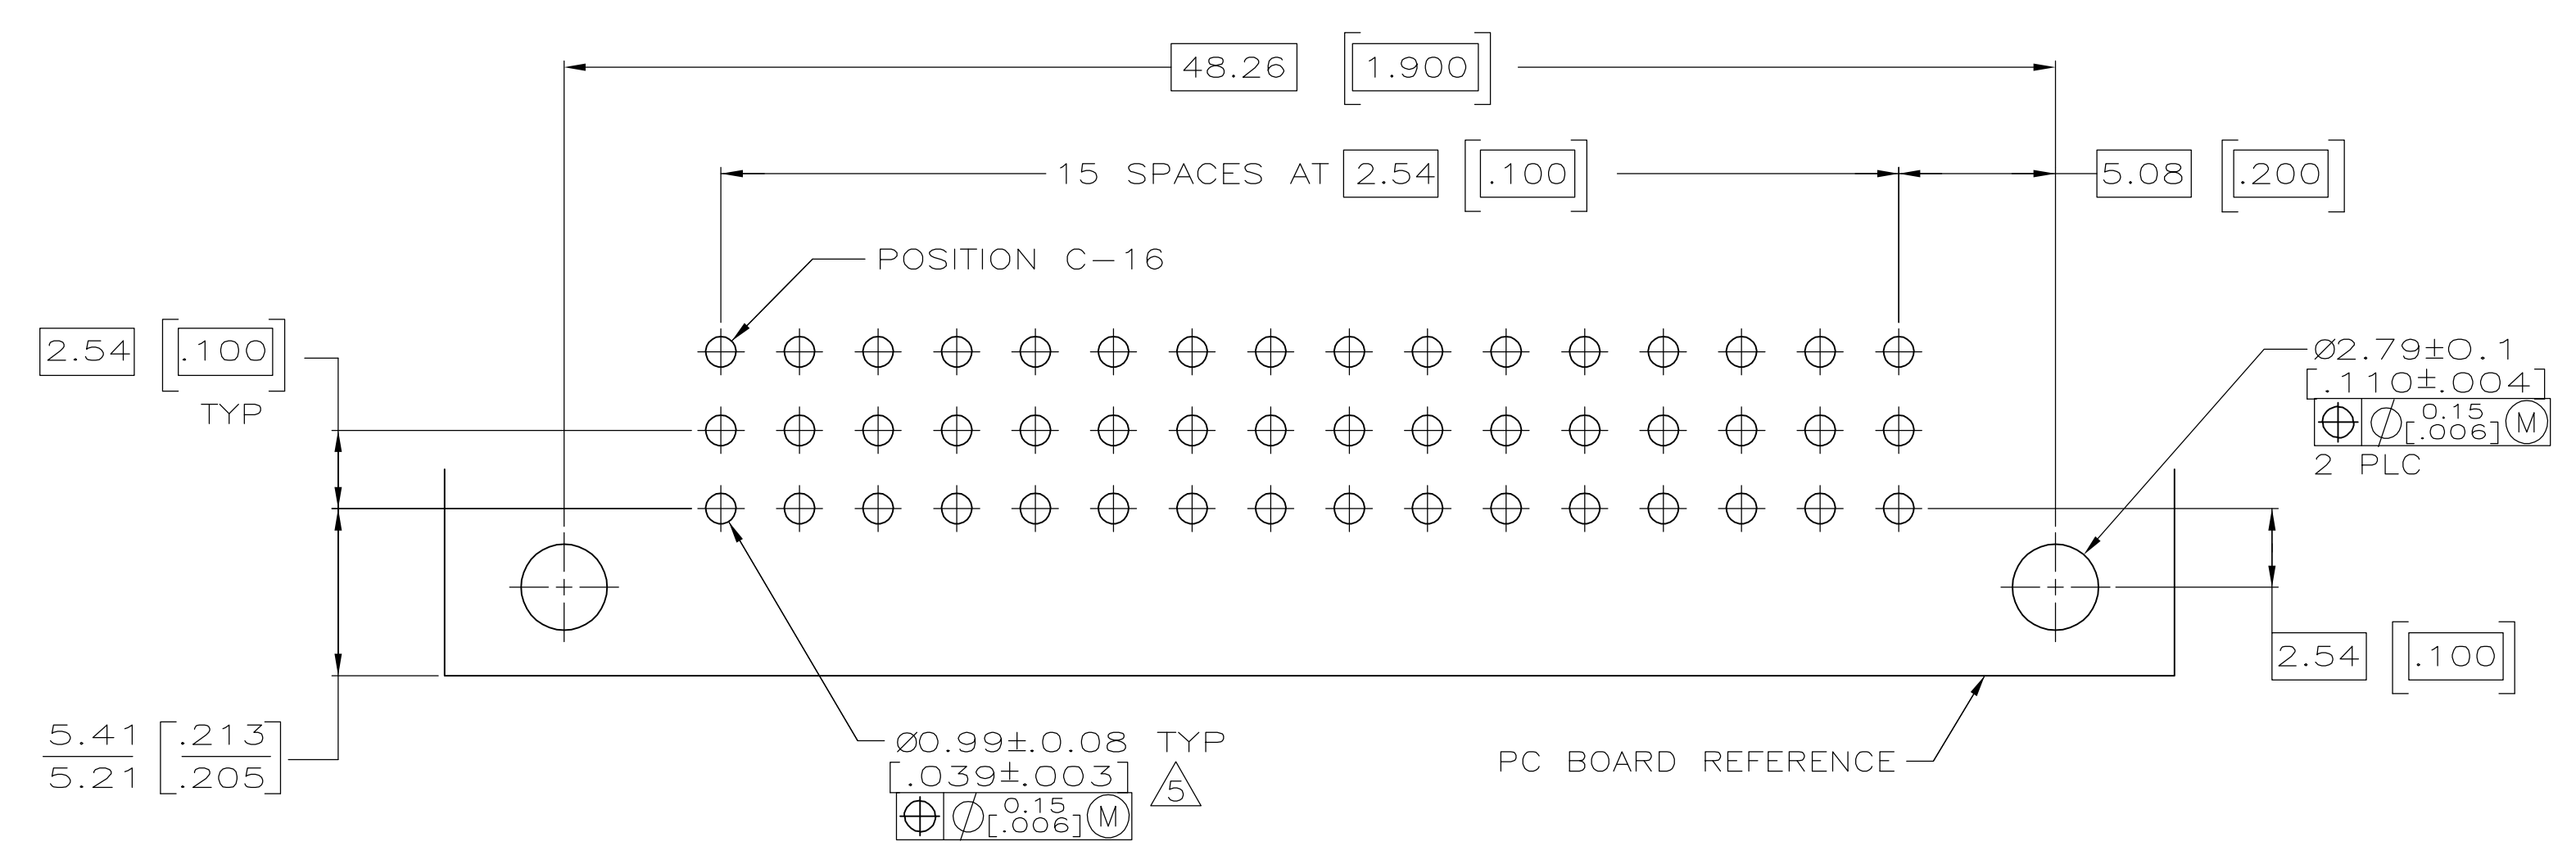
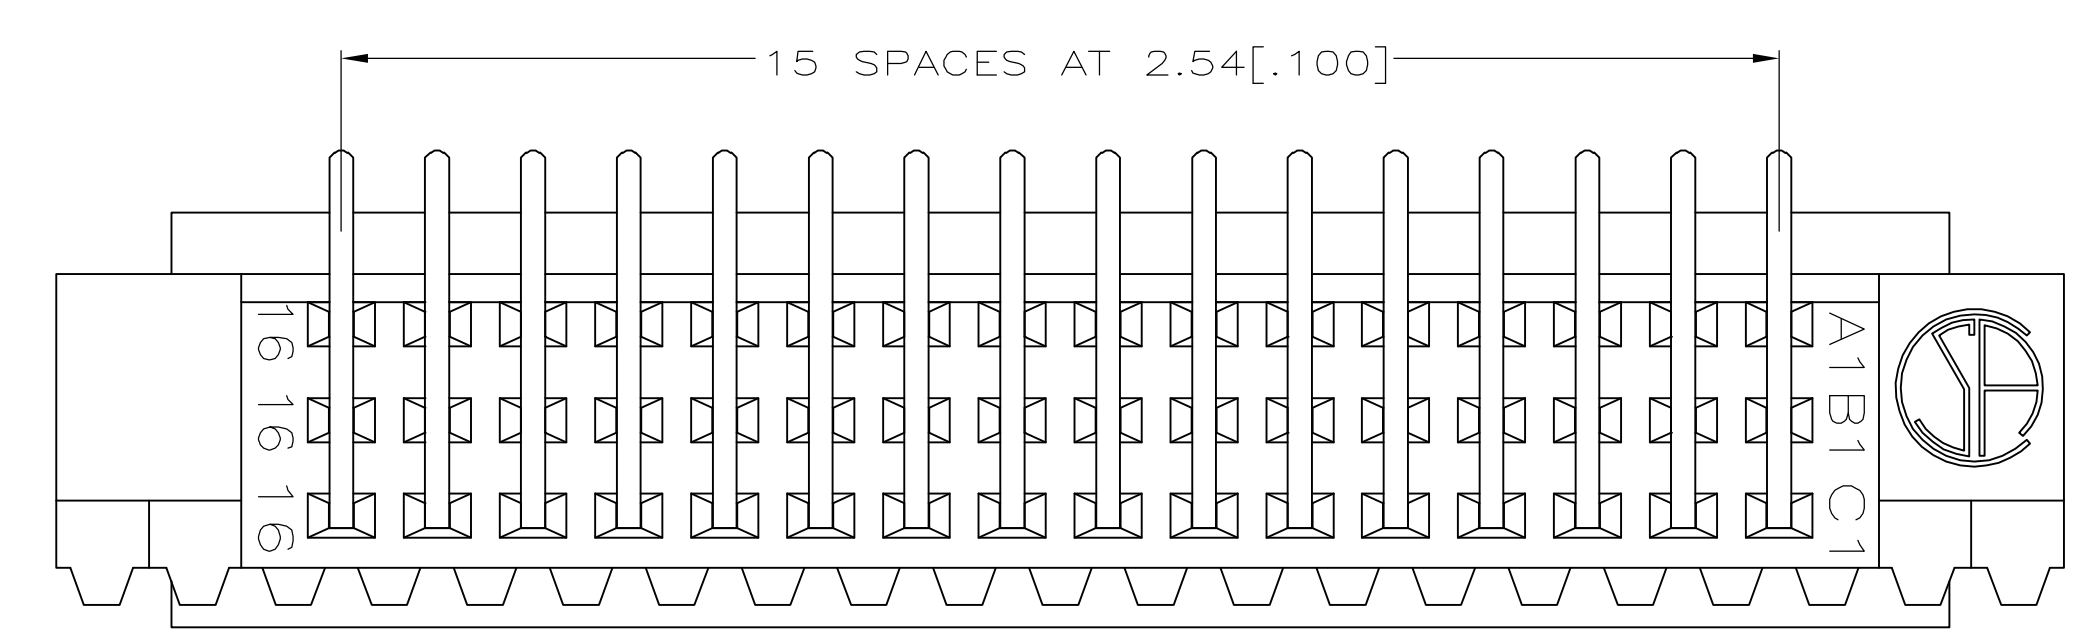
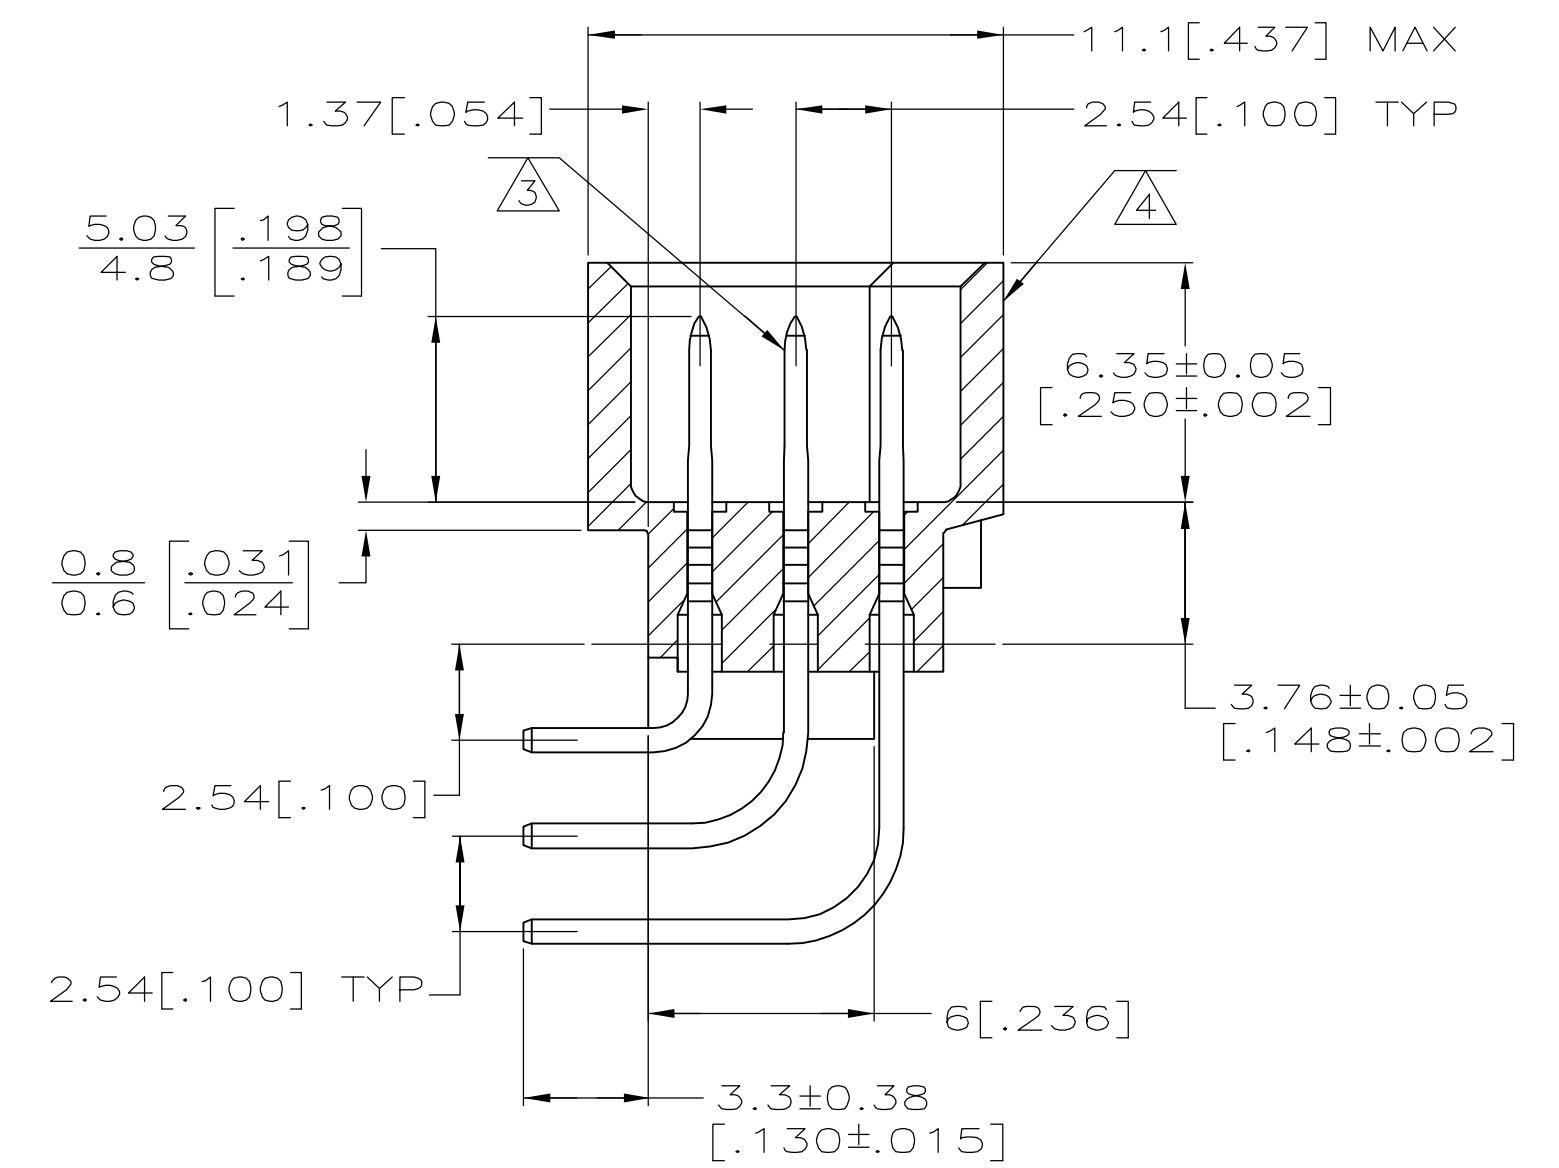


- 1 HOUSING MATERIAL: GLASS-FILLED POLYMER.
- 2 POST MATERIAL: COPPER ALLOY.
- 3 POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- 4 MARKING ON THIS SIDE.
- 5 RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- 6 PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

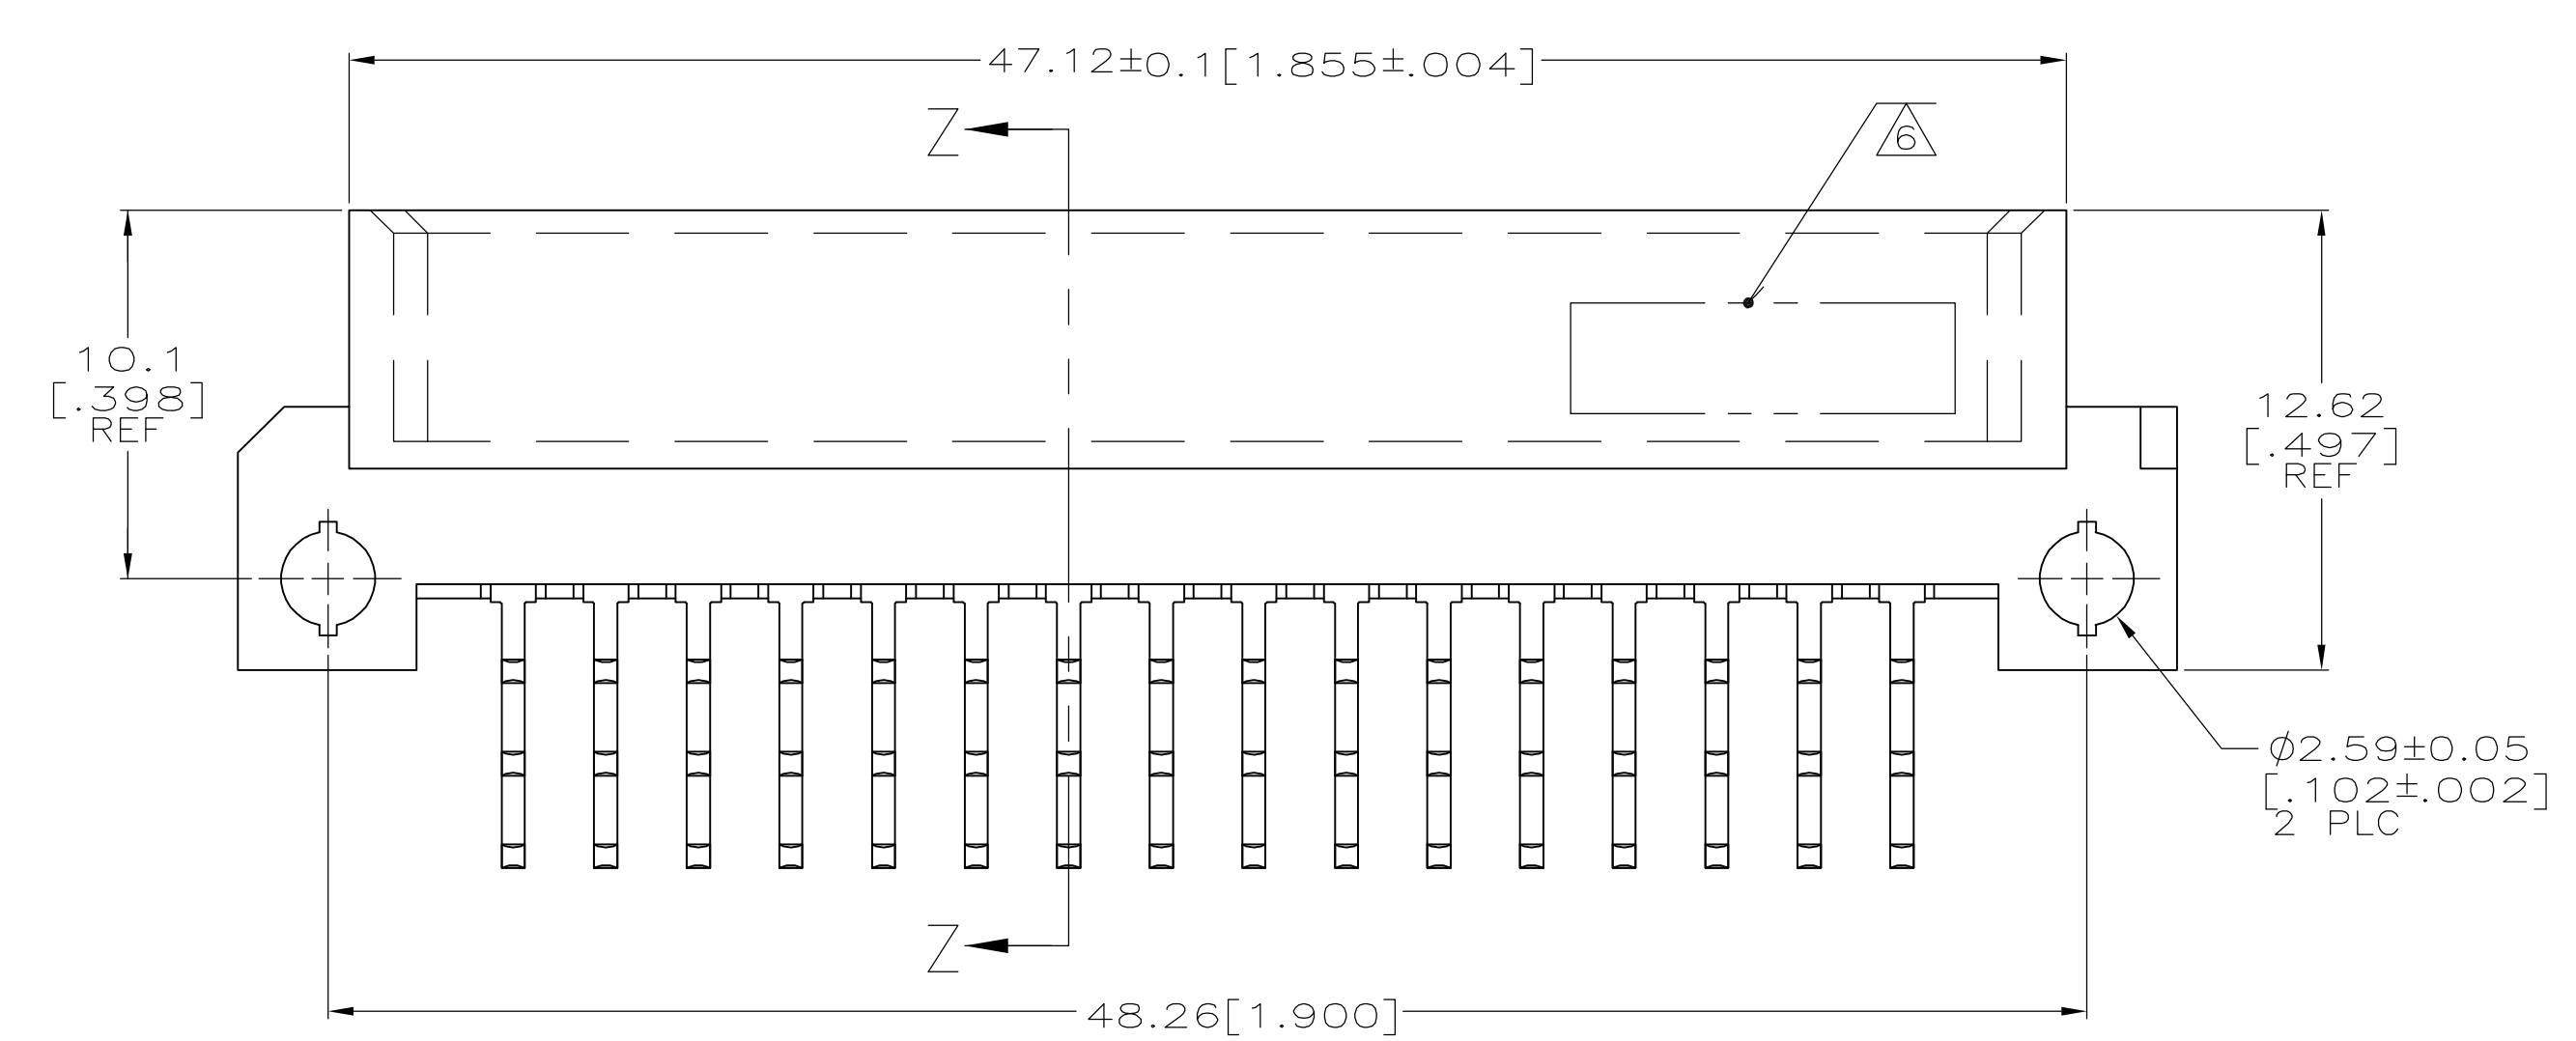

PC BOARD LAYOUT

1-16	X	X	X	48	5650948-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. POLIGNONE	OSMAYOS	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		CHK A. SHARPE	OSMAYOS	NAME ASSEMBLY, PIN, EUROCARD, TYPE 1/2C, LEAD FREE, 48 POSITION, 3.30[.130] SOLDER POST	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD A. SHARPE	OSMAYOS	APPLICATION SPEC	
0 PLC ± -				SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ± -				A1 00779 C=5650948	
2 PLC ± 0.15[.005]				WEIGHT -	
3 PLC ± -				CUSTOMER DRAWING	
4 PLC ± -				SCALE 5:1	
ANGLES ± -				SHEET 1 OF 1	
FINISH				REV 0	