


## 5787745 -2 Product Details

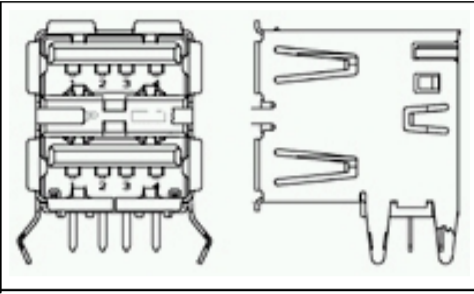

**5787745 -2**

 [Active](#)

### Universal Serial Bus (USB) Connectors

[Always EU RoHS/ELV Compliant](#) ( [Statement of Compliance](#) )

#### Product Highlights:

- ? USB Type = Standard
- ? A Series
- ? Receptacle
- ? 2 Ports
- ? Right Angle Mount Orientation

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

[Check Pricing & Availability](#)  
[Search for Tooling](#)  
[Product Feature Selector](#)  
[Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- ? [RECEPTACLE ASSEMBLY, RIGHT ANGLE, STACKED, THRU - HOLE, USB](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- ? None Available

#### Product Specifications:

- ? None Available

#### Application Specifications:

- ? None Available

#### Instruction Sheets:

- ? None Available

#### CAD Files:

- ? None Available

#### Additional Information:

- ? [Product Line Information](#)

#### Related Products:

- ? [Tooling](#)

[List all Documents](#)

### Product Features

(Please use the Product Drawing for all design activity)

#### Product Type Features:

- ? Gender = Receptacle
- ? Number of Ports = 2
- ? PCB Mount Style = Thru Hole
- ? PCB Thickness (mm [in]) = 1.57 [0.062]

#### Electrical Characteristics:

- ? Panel Ground Type = Spring Finger

#### Termination Related Features:

- ? Termination (Solder) Post Length (mm [in]) = 2.29 [0.090]

#### Body Related Features:

- ? [Series](#) = A
- ? Mount Orientation = Right Angle
- ? [Panel Ground](#) = With
- ? Shell Plating = Tin over Copper

#### Contact Related Features:

- ? [Contact Mating Area Plating Material](#) = Gold Flash over Palladium Nickel or Gold (30) over Nickel
- ? Contact Material = Copper Alloy

#### Housing Related Features:

- ? [Housing Color](#) = Black
- ? Housing Material = Thermoplastic
- ? Housing Flammability Rating = UL 94V -0

#### Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

#### Conditions for Usage:

- ? USB Type = Standard

#### Packaging Related Features:

- ? Panel Ground Location = Middle
- ? [Packaging Method](#) = Box

#### Other:

- ? Brand = AMP