


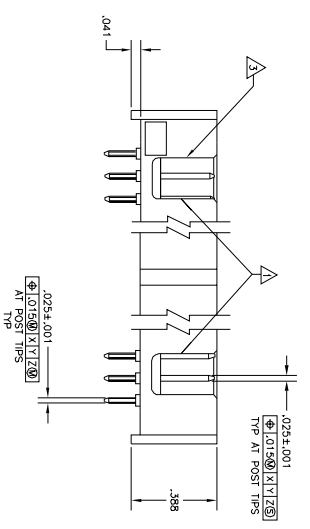


REV	DATE	BY	CHKD	REVISIONS
CP	00			
D				1-HOUSING/2-MIN/3-SL

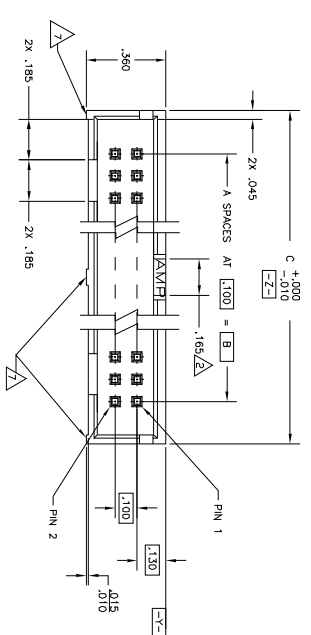

RECOMMENDED PCB LAYOUT

- △ DOUBLE BAR POLARIZATION SLOTS.
- △ CENTER POLARIZATION SLOT.
- △ FOR 10 POSN ASSEMBLY, SLOT OMITTED IN THIS LOCATION.
- △ DATUMS U AND V TO BE ESTABLISHED BY THE CUSTOMER.
- △ .00050 MIN GOLD PLATE ON THE ENTIRE POST.
- △ .00050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- △ .00050 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN PLATE ON THE SOLDER-TAILS, .00050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
- △ RIBS: ALL POSITION SIZES, 2 LOCATED AT ENDS OF HOUSING, 40 THRU 50 POSITION SIZES, 2 ADDITIONAL, CENTERED ON HOUSING, LENGTH OF HOUSING.

POSN	NO OF	PART
2,800	2,400	24
2,300	1,900	19
2,800	1,900	19
1,400	1,900	19
1,300	900	9
1,100	700	7
1,000	600	6
.800	400	4
		10

THIS DRAWING IS A CONTROLLED DOCUMENT.

DATE: 08-40018

REV: A100779-5103309

EXC: 4-1

REV: 1

FIG: 0