


88048-4 Product Details

[Live Product Chat](#)

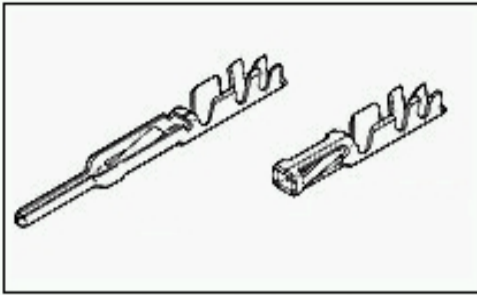

88048-4

TE Part Number: 88048-4

[Active](#)

[Add to Part List](#)

Flexible Film Contacts

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- Pin
- Contact Type = Pin
- Wire Range = 0.03-0.15² [32-26] mm [AWG]
- 2.54 mm Centerline
- Wire/Cable Type = Round Wire, Discrete

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [View Housings \(55\)](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)
- ▶ [Request Samples](#)

NEW!

Documentation & Additional Information

Product Drawings:

- [CONTACT, PIN, .025 SQ ROUND WIRE, .100CL, FFC](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- [FFC Round Wire Pin and Receptacle Contacts](#) (PDF, English)
- [Flexible Flat Cable \(FFC\) Housings with Contact Cavi...](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)
- [Housings \(55\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Pin/Socket = Pin
- [Wire/Cable Type](#) = Round Wire, Discrete
- Wire Insulation Diameter (mm [in]) = 0.64 - 1.22 [0.025 - 0.048]
- Comment = Crimp Control Monitor 567561-2 for AMP-O-ELECTRIC.; Use Extraction Tool No. 91092-1 for end locking slot and Extraction Tool No. 91093-1 for side locking lance slot.

Termination Related Features:

- Solder Tail Contact Plating = Gold Flash

Body Related Features:

- [Wire Range \(mm \[AWG\]\)](#) = 0.03-0.15² [32-26]
- [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]

Contact Related Features:

- [Contact Type](#) = Pin
- [Contact Mating Area Plating Material](#) = Gold (15)
- Contact Underplating = Nickel (50)

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Reflow solder capable to 245°C, Reflow solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- [Packaging Method](#) = Strip

Other:

- Brand = AMP