


925486-1 Product Details



925486-1

TE Internal Number: 925486-1



Active

Eurocard Type C

 Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Eurocard Product Line
- Product Series = Type C
- Housing
- Connector Style = Receptacle
- Wire-to-Board

Documentation & Additional Information

Product Drawings:

- [96 POS. AMPMODU IV CRIMP-SNAP-IN HOUSING 96 POL. AMP...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [AMPMODU Mod 1/2 Wire to Board Standard Pressure Cont...](#) (PDF, English)
- [Tandem Spring Contact Receptacle](#) (PDF, English)

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version N)
- [3D Model](#) (IGES, Version N)
- [3D Model](#) (STEP, Version N)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)
- [Mating Products \(8\)](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Line = Eurocard
- Product Series = Type C
- Connector Type = Housing
- Wire/Cable Type = Discrete Wire
- [PCB Mount Retention](#) = Without
- [Termination Method to Wire/Cable](#) = Crimp
- Size = Standard
- [Make First / Break Last](#) = No

Mechanical Attachment:

- Contact Retention in Housing = Crimp Snap-In

Electrical Characteristics:

- Contact - Rated Current (A) = 1.5

Contact Features:

- Contact Type = Socket

Housing Features:

- Connector Style = Receptacle
- Centerline (mm [in]) = 2.54 [0.100]
- Mating Alignment = With
- Mating Alignment Type = Polarization
- Housing Material = Polycarbonate GF
- UL Flammability Rating = UL 94V-1

Configuration Features:

- Number of Rows = 3
- [Number of Positions](#) = 96

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Conditions for Usage:

- [Applies To](#) = Wire/Cable


Operation/Application:

- Application Use = Wire-to-Board
- Contact Transmits (Typical Application) = Signal (Data)

Other:

- Brand = AMP

THIS DRAWING IS UNPUBLISHED. VERTRAULICHE UNVERÖFFENTLICHTE ZEICHNUNG		RELEASED FOR PUBLICATION FREI FUER VERÖFFENTLICHUNG		LOC - -		DIST - -		REVISIONS ÄNDERUNGEN					
© COPYRIGHT - - By - -		ALL RIGHTS RESERVED. ALLE RECHTE VORBEHALTEN						DESCRIPTION BESCHREIBUNG		DATE	DWN	APVD	
VERWENDET FÜR - -		ÄNDERUNGEN DIE DEM TECH- NISCHEN FORTSCHRITT DIENEN, BEHALTEN WIR UNS VOR		CAD-ORIGINAL ZEICHNUNG NICHT ÄNDERN				M5		REVISED PER ECO-11-005150	21MAR11	RK	HMR
WAR NR. 76-9097													

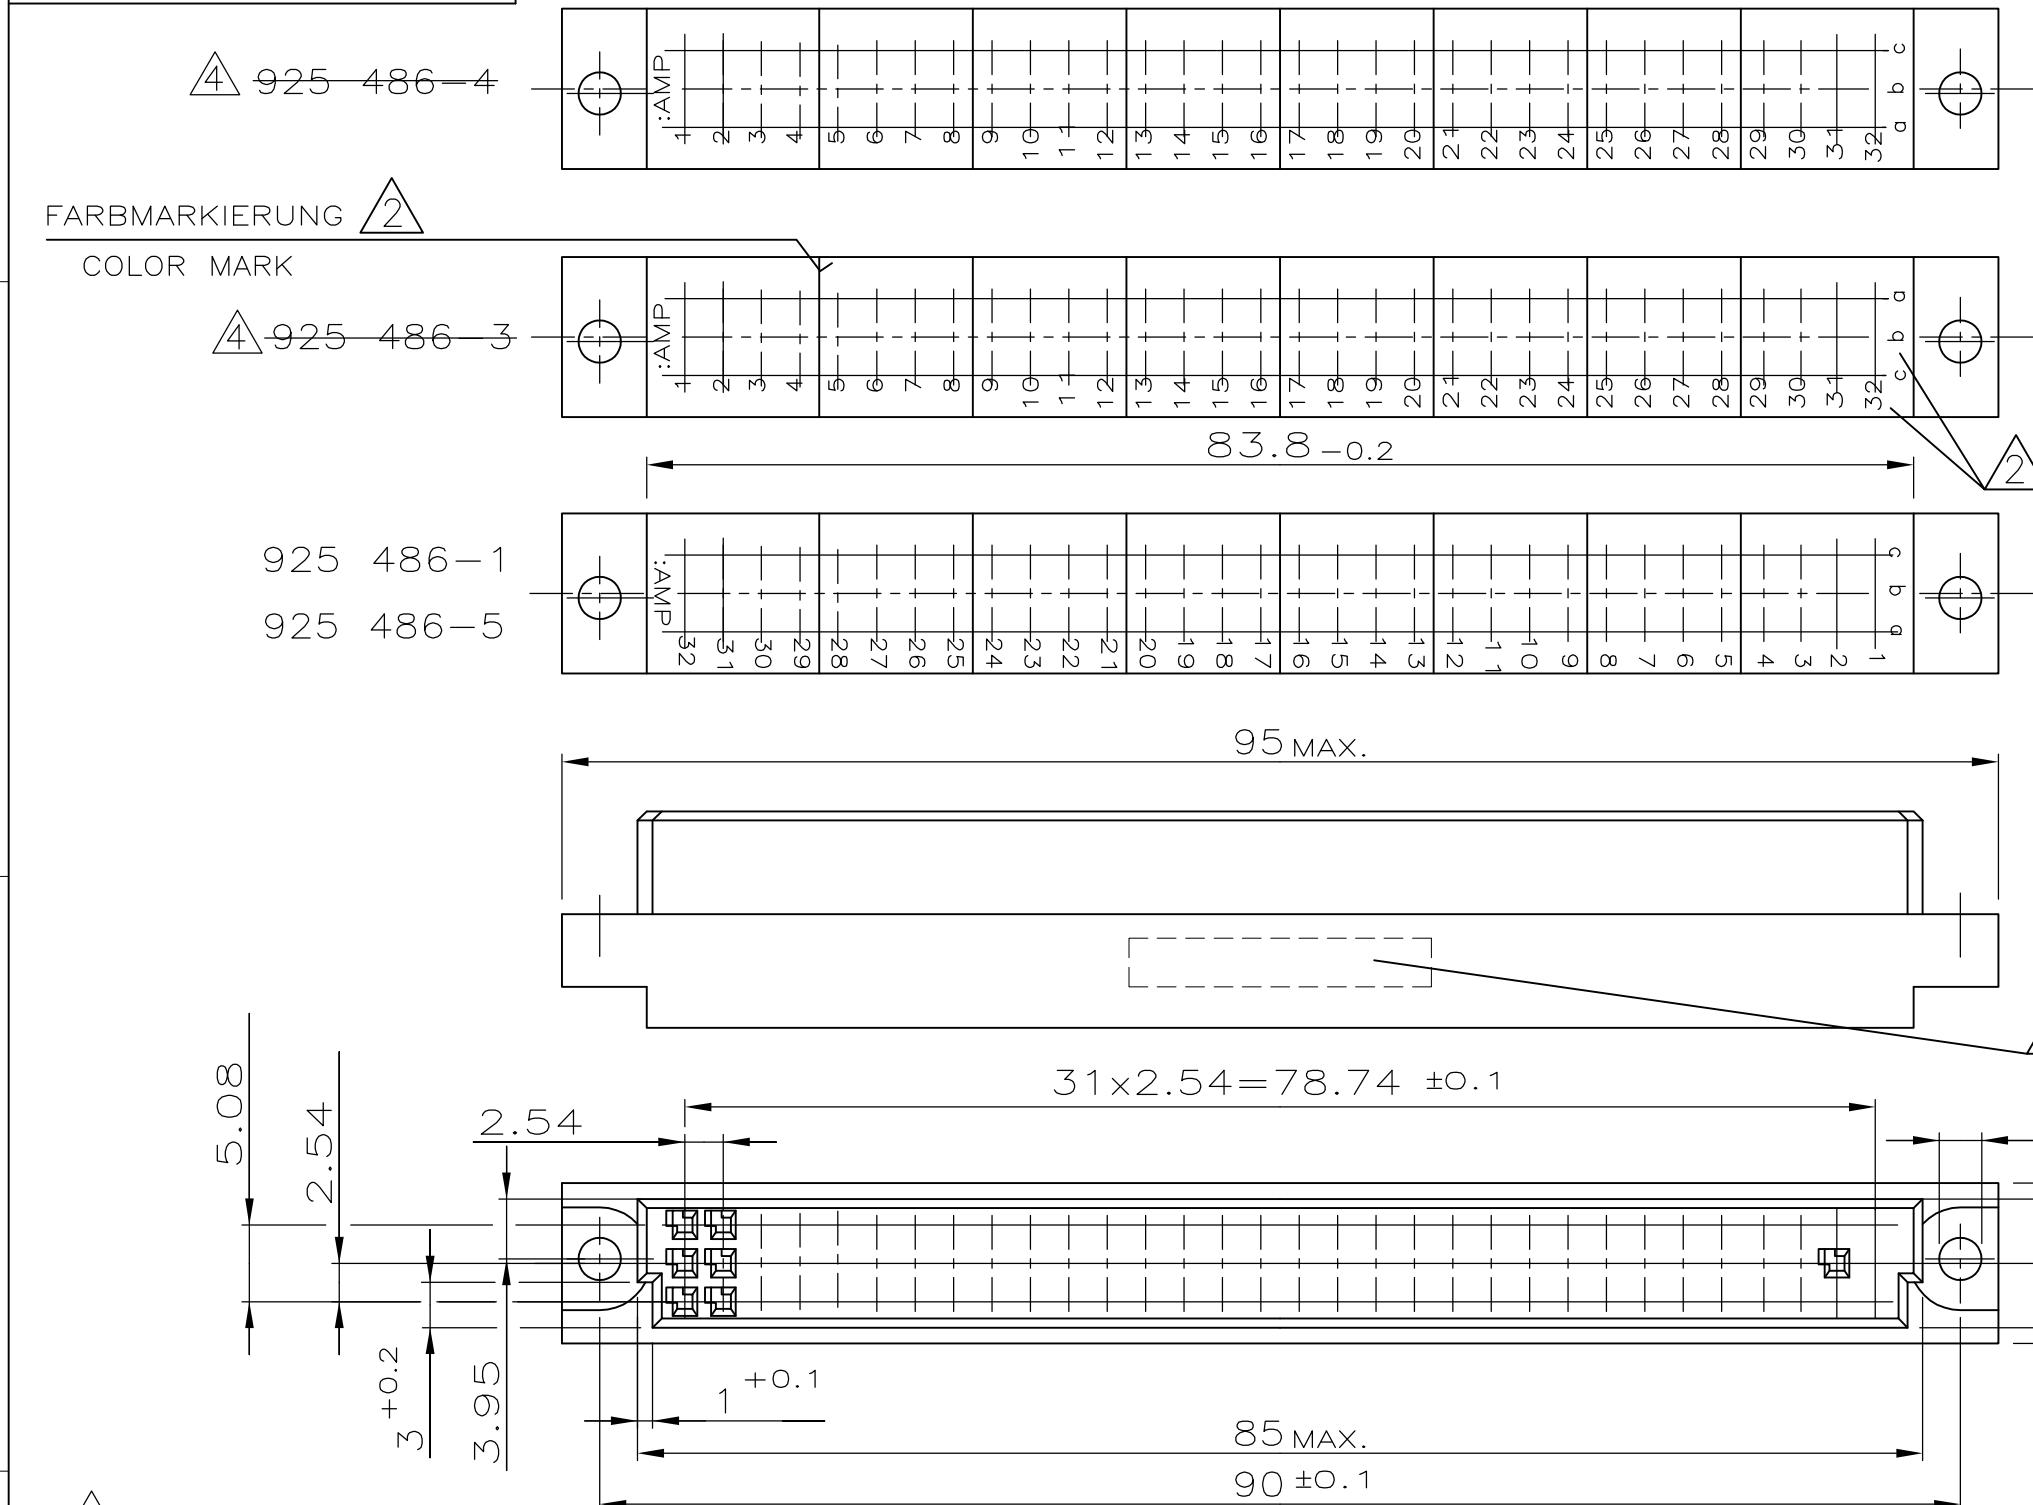

- 1 AUFDRUCK: TEILE NR. UND DATUM
AUF VORDER ODER RÜCKSEITE
STAMP: PART-NO. AND DATE
ON FRONT OR BACKSIDE
- 2 AUFDRUCK: BUCHSTABEN UND ZAHLEN.
FARBMARKIERUNG ZWISCHEN
DEN KAMMERN 4/5; 8/9;
12/13; 16/17; 20/21;
24/25 UND 28/29
STAMP: LETTERS AND NUMBERS.
COLOR MARK BETWEEN CAVITIES
4/5; 8/9; 12/13; 16/17; 24/25
AND 28/29
- 3 925 486-2 OHNE JEGLICHE BEDRUCKUNG
925 486-2 WITHOUT ALL STAMP

4 OBSOLETE PARTS: OBSOLETE CIS
STREAMLINING PER D.RENAUD/D.SINISI

ZEICHNUNG GÜLTIG AB KW14./99

OBSOLETE	925 486-5	1	2	96 POL. MODU IV GEH.	PBT-30GV, UL94 V0	GRAU RAL 7035
	925 486-4	1	2	96 POL. MODU IV GEH.	PC 20GV	GRAU RAL 7032
	925 486-3	1	2	96 POL. MODU IV GEH.	PC 20GV	GRAU RAL 7032
	925 486-2	3		96 POL. MODU IV GEH.	PC 20GV	GRAU RAL 7032
	925 486-1	1	2	96 POL. MODU IV GEH.	PC 20GV	GRAU RAL 7032
	BESTELL-NR.	BEMERKUNG	BENENNUNG EINZELTEIL	WERKSTOFF	OBERFLÄCHE FARBE	

THIS DRAWING IS A CONTROLLED DOCUMENT. DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.		DWN A.HO	14.12.1988	STE TE Connectivity	
DIMENSIONS: MASSE/HEITEN: mm		CHK	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN		APVD	-	NAME	
0 PLC ± - 1 PLC ± 0.2 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES / WINKEL ± -		PRODUCT SPEC PRODUKTSPEZ.	-	96 POS. AMPMODU IV CRIMP-SNAP-IN HOUSING 96 POL. AMPMODU IV CRIMP-SNAP-IN GEHAEUSE	
MATERIAL		APPLICATION SPEC. VERARBEITUNGSSPEZ.	-	SIZE	CAGE CODE
FINISH/OBERFLÄCHE/FARBE		WEIGHT GEWICHT	-	A3	00779
		CUSTOMER DRAWING/KUNDENZEICHNUNG		DRAWING NO ZEICHNUNGS-NR.	RESTRICTED TO NUR FUER
				G-925486	-
				SCALE MASSTAB 2:1	SHEET BLATT 1 OF VON 1
				REV M5	