

SPECIFICATION CONTROL DRAWING

2021D0309

CHEMINAX

120 OHM, 0.508 mm², 19 STRANDS OF 0.19 mm,
TWINAXIAL CABLE, J1939-11 COMPLIANT

Date: 2-20-19
Revision: L


THIS SPECIFICATION SHEET FORMS A PART OF THE LATEST ISSUE OF RAYCHEM SPECIFICATION 1200.

CONSTRUCTION DETAILS

ELECTRICAL CHARACTERISTICS

DIMENSIONS ARE NOMINAL VALUES IN INCHES, UNLESS OTHERWISE DESIGNATED.

CHARACTERISTIC IMPEDANCE	120 ± 12 ohms, Method D at 1 MHz with wrap grounded
MUTUAL CAPACITANCE	10.5 pF/ft. (nominal) at 1 MHz
VELOCITY OF PROPAGATION	75% (nominal)
SURFACE TRANSFER IMPEDANCE (per SAE AS85485)	225 milliohms/meter (maximum) at 0.1 to 1 MHz

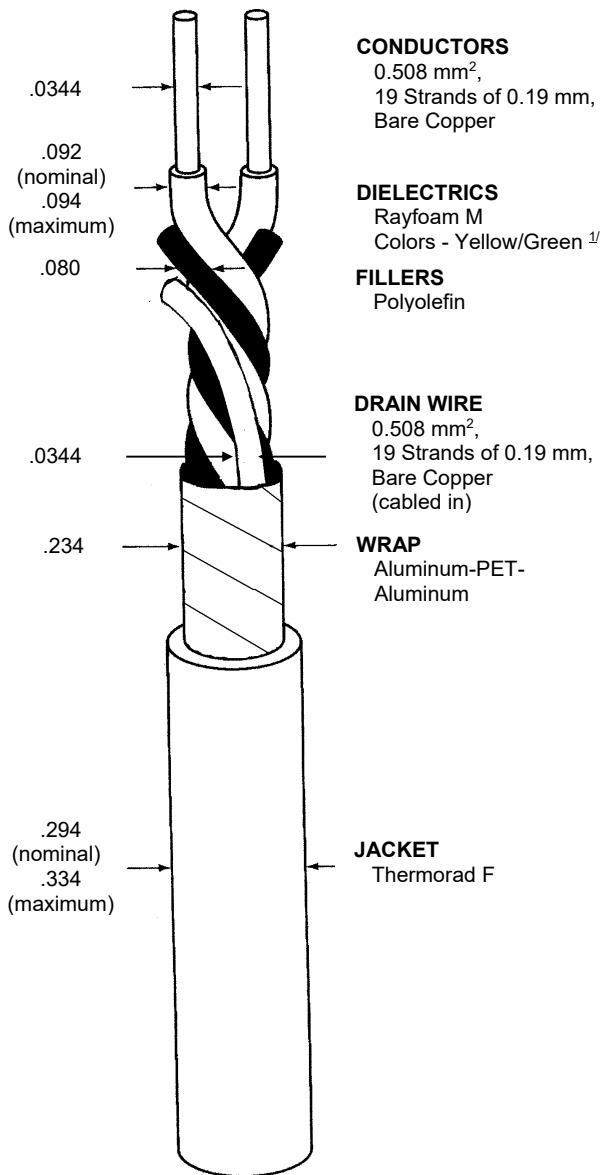

- CONDUCTORS**
0.508 mm²,
19 Strands of 0.19 mm,
Bare Copper
- DIELECTRICS**
Rayfoam M
Colors - Yellow/Green ^{1/}
- FILLERS**
Polyolefin
- DRAIN WIRE**
0.508 mm²,
19 Strands of 0.19 mm,
Bare Copper
(cabled in)
- WRAP**
Aluminum-PET-
Aluminum

ADDITIONAL REQUIREMENTS

ELECTRICAL	
CONDUCTOR RESISTANCE (prior to cabling)	11.3 ohms/1000 ft. (nominal)
INSULATION RESISTANCE	10,000 megohms (minimum) for 1000 ft.
JACKET FLAWS	
SPARK TEST	1.0 kV (rms)
IMPULSE TEST	6.0 kV (peak)
VOLTAGE WITHSTAND (DIELECTRIC)	1000 volts (rms) (minimum)
ENVIRONMENTAL	
FLAMMABILITY	Method C
HEAT SHOCK	225°C
LOW TEMPERATURE-COLD BEND	-55°C/8.00 inch mandrel
VOLTAGE WITHSTAND (Post Environmental)	1000 volts (rms), 1 minute
PHYSICAL	
INSULATION (DIELECTRIC)	
ELONGATION	100% (minimum)
TENSILE STRENGTH	1000 lbf/in ² (minimum)
JACKET	
ELONGATION	200% (minimum)
TENSILE STRENGTH	2000 lbf/in ² (minimum)
JACKET THICKNESS	.025 inch (minimum), .030 inch (nominal), .040 inch (maximum)
WRAP	.003 inch thick (nominal), 10% overlap (minimum)

Designate outer jacket color with a dash number in accordance with MIL-STD-681. Unless otherwise specified, outer jacket color will be black designated by a "-0" appended to the part number, (e.g. 2021D0309-0).

^{1/} Component Wire Stripe Option: Dielectrics striped red will be designated with a slash separating component wire colors, (e.g. 2021D0309-42/52-0).

Other codes and suffixes may be added to the part number, as necessary, to capture any additional requirements imposed by the purchase order.

CABLE IDENTIFICATION: Outer jacket shall be marked in contrasting color at 12 inch (nominal) intervals as follows:

- for product jacketed in USA: "RAYCHEM J1939-11 0.5 mm²"
- for product jacketed in Mexico: "RAYCHEM J1939/11 0.5 mm²"
- for product jacketed in UK: "RAYCHEM J1939_11 0.5 mm²"

WEIGHT 34.3 lbs/1000 ft. (nominal)

ENGINEERING REFERENCE

TEMPERATURE RATING 125°C (maximum)

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. TE Connectivity also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

