


REVISION			
REV	DESCRIPTION	DATE	APPROVED
C2	ADDED SIZE 4 TO TABLE, SEE ECO-20-002059	2/12/2020	I.MYONG

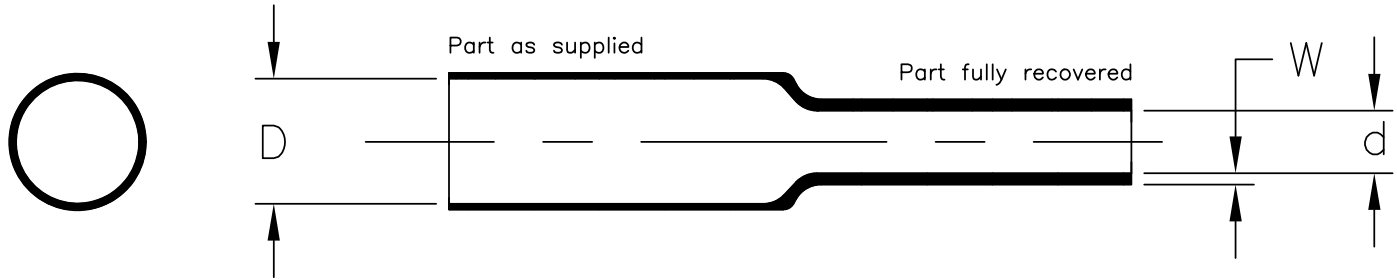

As Supplied			As Recovered							
Size	Inside Diameter 'D'		Inside Diameter 'd'		Wall Thickness 'W'					
	Minimum		Maximum		Minimum		Maximum		Nominal	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/8 $\triangle 5$.125	3.18	.062	1.57	.023	0.58	.037	0.99	.030	0.76
3/16 $\triangle 5$.187	4.75	.094	2.39	.026	0.66	.040	1.02	.033	0.83
1/4 $\triangle 5$.250	6.35	.125	3.18	.028	0.71	.042	1.07	.035	0.89
3/8	.375	9.52	.187	4.75	.032	0.81	.048	1.21	.040	1.02
1/2	.500	12.70	.250	6.35	.040	1.02	.056	1.42	.048	1.21
3/4	.750	19.05	.375	9.52	.046	1.16	.068	1.72	.057	1.45
1	1.000	25.40	.500	12.70	.059	1.49	.081	2.05	.070	1.78
1-1/2	1.500	38.10	.750	19.05	.079	2.00	.111	2.81	.095	2.41
2	2.000	50.80	1.000	25.40	.094	2.38	.126	3.20	.110	2.79
3	3.000	76.20	1.500	38.10	.105	2.66	.145	3.68	.125	3.18
4	4.000	101.60	2.000	50.80	.120	3.05	.160	4.05	.140	3.55

Raychem Harness & Components **CUSTOMER DRAWING**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS.
AND INCH DIMENSIONS ARE IN SHOWN IN (PARENTHESES).

DECIMALS: .000 ± 0.000
.00 ± 0.00
.0 ± 0.0

ANGLES: ± 0° 00'



TE Connectivity

TE CONNECTIVITY CORPORATION
RESERVES THE RIGHT TO AMEND
THIS DRAWING AT ANYTIME.
USER SHOULD EVALUATE THE
SUITABILITY OF THE PRODUCT
FOR THEIR APPLICATION.

TITLE:
DR-25
HEAT-SHRINKABLE TUBING

DRAWING NO:
DR-25