
Distributed by:



www.Jameco.com + 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 738751

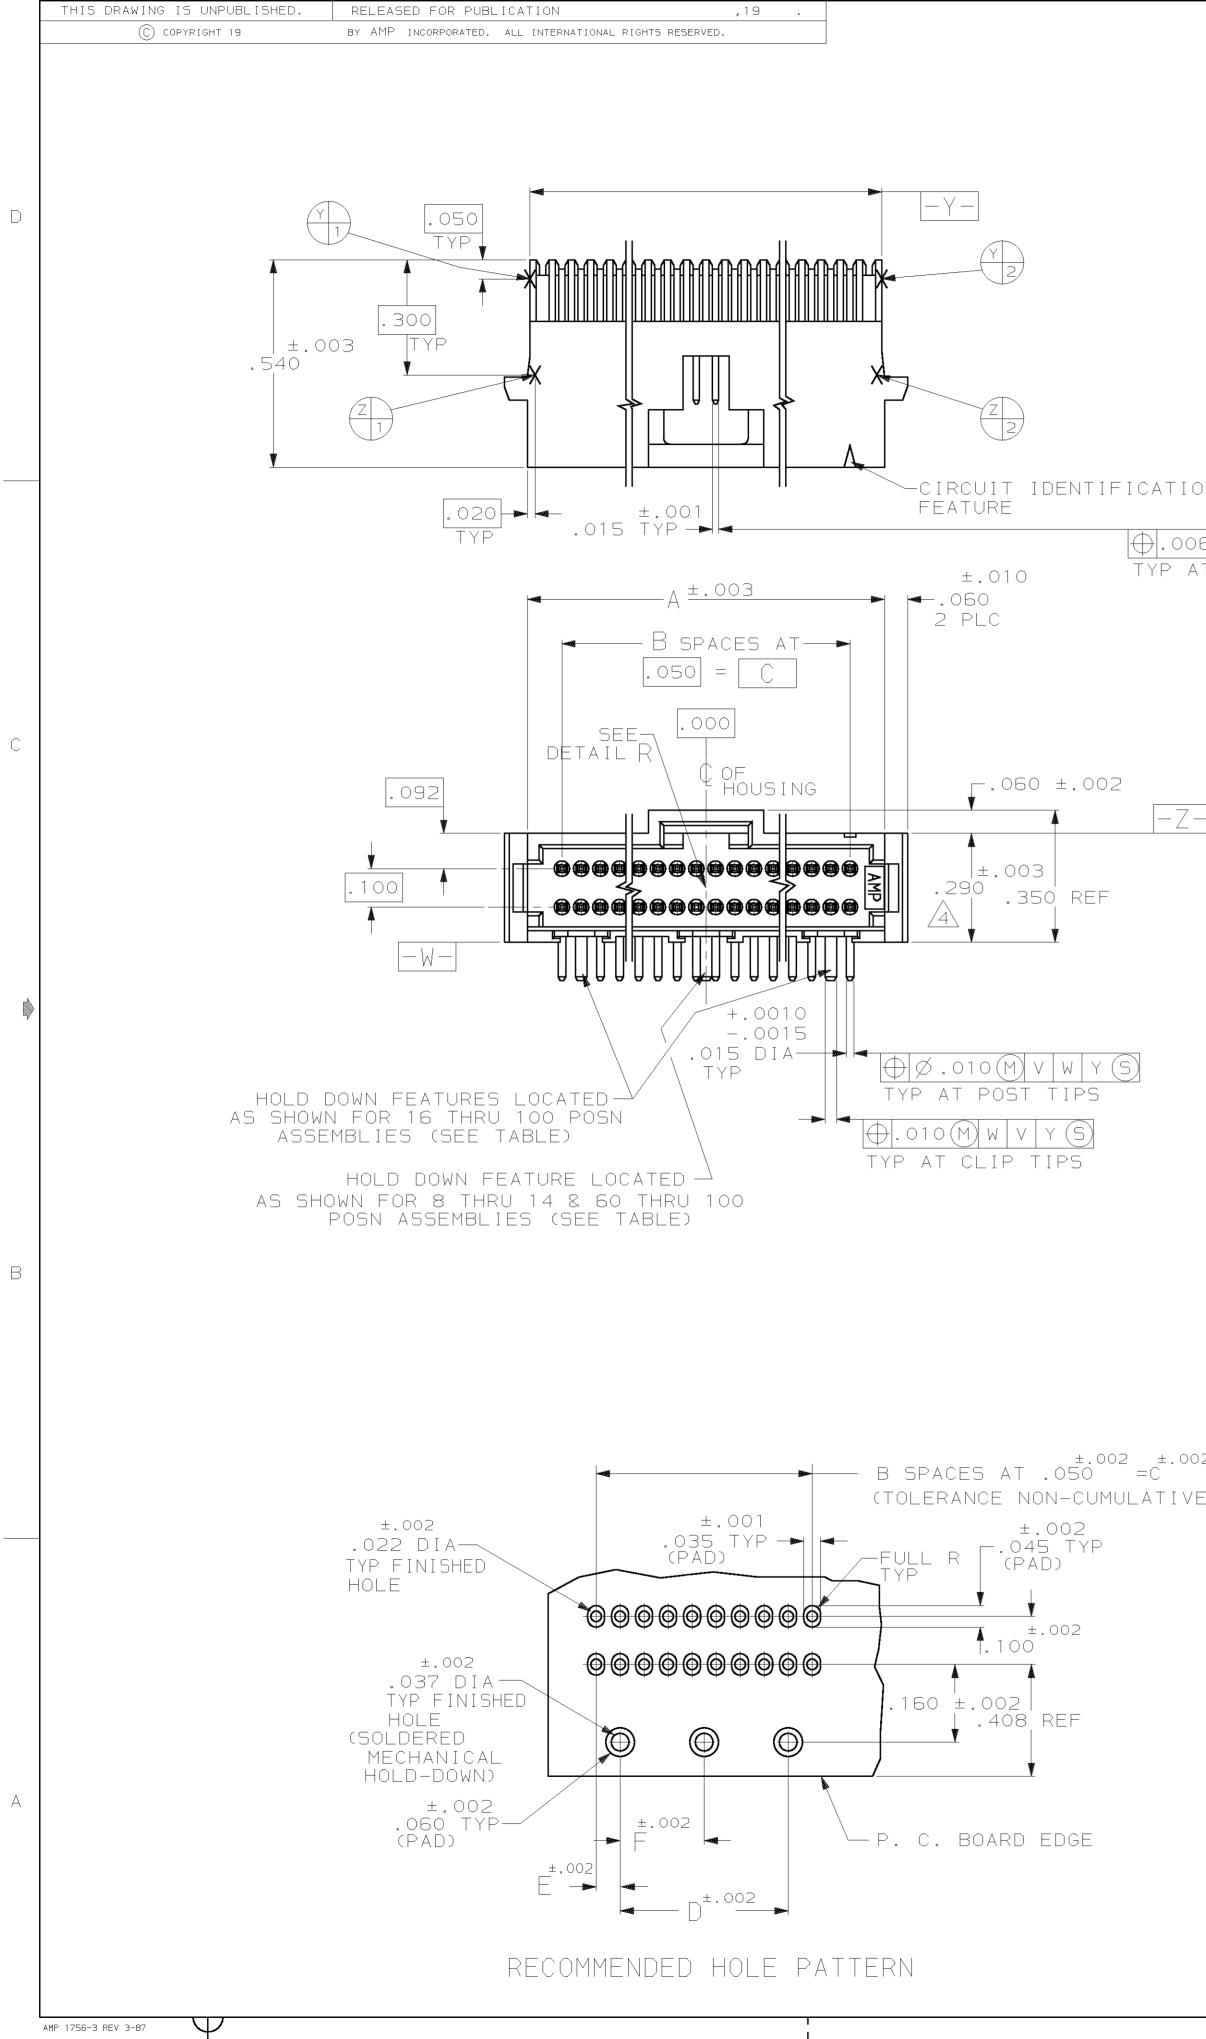

17-MAY-05 13:20:06 us034723 /home/us034723/edmmod/ROHDE

B DRAWING MADE IN THIRD ANGLE PROJECTION

6

5

4

	د								
		AD 3	57 39 p f zo			REVISI			
) P F ZO		V PER (DESCRIPTIO		DATE APPI 11N0V04 JR/[
					R-05-0		~ '	17MAY05 DR	
	Λ								
		NTACT AREA PL Ated with .oc	ATED WI	TH .000	030 M	IN GOLD	, SOLD	DER LEADS	\rightarrow
							JUSU N	NICKEL	
		INT OF MEASUF							- D
	A CI	RCUIT IDENTIF SITION HEADEF	FICATION	FEATUR	RE OMI	TTED ON	8,10,	12,& 14	1
	A								
		MENSION APPL							
		E NOTED DIMEN The post and	VSIONS A	PPLY AT	T THE	INTERSE	CTION		
	UF	THE PUST AND	J HUUSIN	IG					-
		INTACT AREA PI	ATED WI	TH 000) 070 M			NER LEADS	
	PL	NTACT AREA PL Ated With .00	D0150 TI	N, ALL C	OVER .	000050	NICKEL	-	
ION									
OG(M) V Z Y (S)									
AT POST TIPS									
-V- TYP									
\rightarrow	. –		1	1	1	1	1	1	
(CONTACT AREA)	<u>í</u>	.775 .050	1.550	1.650	33	1.830	68	6-104069-8	C
— <u> </u>	<u> </u>	1.175 .050	2.350	2.450	49	2.630	100	6-104069-7	
		.825 .050	1.650	1.750	35	1.930	72	6-104069-6	
	PRELIMINARY 6	050	. 950	1.050	21	1.230	44	6-104069-5	
	<u>(</u>	050	.700	. 800	16	. 980	34	6-104069-4	
±.001	<u> </u>	050	.500	.600	12	. 780	26	6-104069-3	
.015 TYP	<u> </u>	050	. 450	.550	11	.730	24	6-104069-2	
	4	050	. 250	. 350	7	. 530	16	6-104069-1	
.100 ±.020		150		. 300	6	. 480	14	6-104069-0	
$\square \qquad \square \qquad$	PRELIMINARY 6	125		. 250	5	. 430	8	5-104069-9 5-104069-8	
		.675 .050	1.350	1.450	29	1.630	60	5-104069-7	
\oplus .010(M) W V		050	. 850	. 950	19	1.130	40	5-104069-6	
		050	. 600	.700	14	. 880	30	5-104069-5	
TYP AT CLIP TIPS		100	_	. 200	4	. 380	10	5-104069-4	
	(A)	.925 .050	1.850	1.950	39	2.130	80	5-104069-3	
		050	1.100	1.200	24	1.380	50	5-104069-2	
TYP AT CLIP TIPS	6	050	. 350	. 450	9	. 630	20	5-104069-1	
. 408 . 100		.775 .050	1.550	1.650	33	1.830	68	1-104069-8	
AT POST TIPS		1.175 .050	2.350	2.450	49	2.630	100	1-104069-7	
		.825 .050	1.650	1.750	35	1.930	72	1-104069-6	
	OBSOLETE A	050	. 950	1.050	21	1.230	44	1-104069-5	— В
		050	.700	.800	16	. 980	34	1-104069-4	
		050	.500	.600	12	. 780	26	1-104069-3	-
		050	. 450	.550		.730	24	1-104069-2	
		<u> </u>	. 250	.350	6	. 530	16	<u>1-104069-1</u> 1-104069-0	
	OBSOLETE //	125		. 250	5	. 480	12	104069-9	
		075		. 150	3	. 330	8	104069-8	
002		.675 .050	1.350	1.450	29	1.630	60	104069-7	-
		050	. 850	. 950	19	1.130	40	104069-6	-
VE)B .000 .000		050	. 600	.700	14	. 880	30	104069-5	
		100	-	. 200	4	. 380	10	104069-4	-
		.925 .050	1.850	1.950	39	2.130	80	104069-3	
		050	1.100	1.200	24	1.380	50	104069-2	
		050	. 350	. 450	9	. 630	20	104069-1	
							NO	PART	}
		F E			B	A	OF	NUMBER	
							POSN		
			-	-		•	-	PART NO	
	DO NOT SCALE PRINT.	DR 10-3-88							
UNLESS SPECIFIED D. CLOUSER					Į.		AMP INCOR	PORATED	
BASIC DIMENSIONS FOR BASIC DIMENSIONS FOR	TOLERANCES ON :	CHK 10-3-88 T. ZOLA			<u>Kliij</u> -		larrisburg,	Pa. 17105	A
EVEN NO OF SPACES ODD NO OF SPACES	2 PLC DEC ± - 3 PLC DEC ± .005	APPD 10-3-88		NAME					
(SEE TABLE) (SEE TABLE)	ANGLES ± - Material	T. ZOLA APPD 10-3-88		— нелг	NER AS	SEMBLY,F	RIGHT	ANGLE	-
detail R	HOUSING: THERMOPLASTIC COLOR-BLACK	C. SNYDER						E & END	
	COLOR-BLACK Contact:Copper alloy	PRODUCT SPEC						System 50	-
		108-1093		-					-
	FINISH	APPLICATION SPEC			FSCM NO				-
	see table 🔬	114-2503	í		0077	J)4069	
		WEIGHT _		- SCALE	4:1		SHE	^{EET} 10F1	-
							TOME	ER DRAWIN	G
						$\sim \sim \cup$			\smile

З

2