

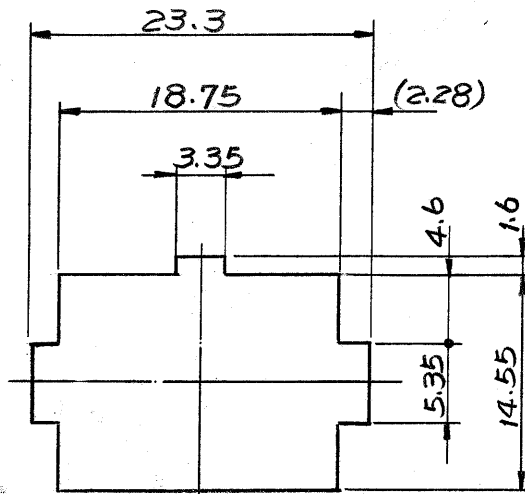
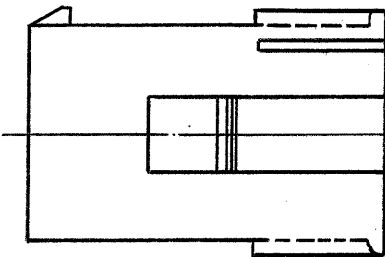
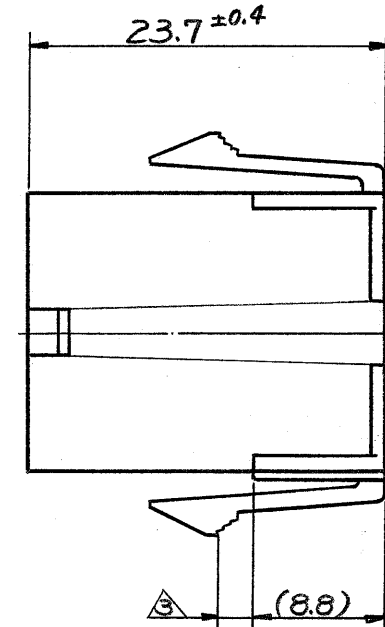


© 1980 年 日本エー・エム・ピー株式会社  
AMP 社の諸製品は特許又は特許出願中

© 1980 BY AMP (Japan) Ltd.  
ALL RIGHTS RESERVED. AMP  
PRODUCTS COVERED BY PATENTS  
AND/OR PATENTS PENDING

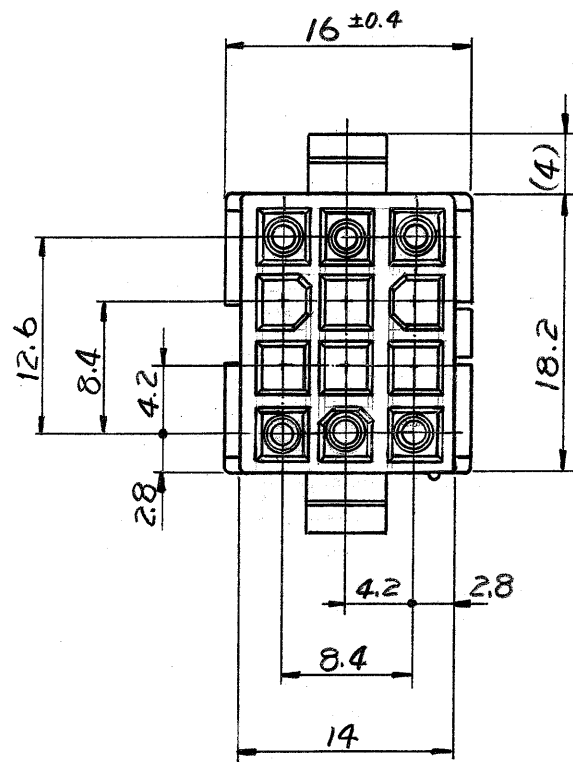

寸法公差は 0.20  
(TOLERANCE: ±0.2)  
パネル取付穴 (DIMENSION OF PANEL)

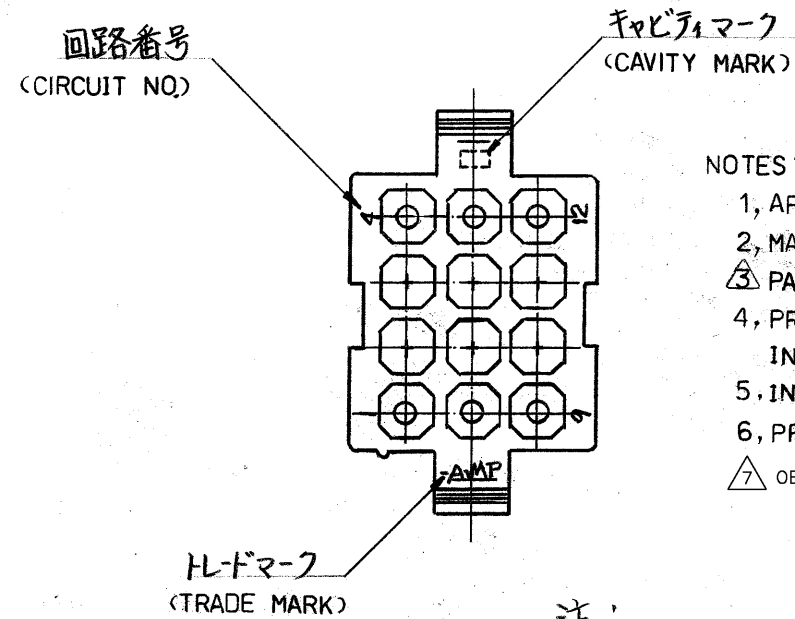

NOTES:

- 1, APPLIED CONTACT P/N: 170359, 170360, 17361, 170362
- 2, MATING CONN: PLUG HOUSING P/N 172341
- ③ PANEL THICKNESS: 0.8 ~ 2.0 mm
- 4, PRESS DIRECTION OF PANEL MUST BE SAME AS HOUSING INSERTED DIRECTION.
- 5, INSTRUCTION SHEET: IS-105J
- 6, PRODUCT SPEC: 108-5151
- ⑦ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

注:

1. 使用端子型番は 170359, 170360, 170361, 170362
2. 嵌合相手ハウジング型番は 172341.
- ③ 適用パネル厚 0.8 ~ 2.0 mm
4. 取付穴打抜方向とハウジングの挿入方向は同じとする.
5. 取扱説明書: IS-105J
6. 適用製品仕様書: 108-5151

OBSOLETE	黄 (YELLOW)	1-172333-4
	黒 (BLACK)	1- -9
	青 (BLUE)	1- -6
	緑 (GREEN)	1- -5
	赤 (RED)	1- -2
	自然色 (NATURAL) 色 (COLOR)	172333-1 型番 (P/N)

A2	ECO-10-000444	KK AEG	JAN 10
A1	黄色追加 J-10297	T.O M.S	9/28
A	変更 J-9972	A.K	8/31
0	変更 J81-5998	2.3 Z.T	4/21
0	作成 J81-5987	K.Y Z.T	3/6
LTR.	変更 (REVISION RECORD)	DR.	CHK.

材料 (MATERIAL) 6/6 ナイロン (UL94V-2) (NYLON 6/6 UL94V-2)	一般公差 TOLERANCE ± 0.3 EXCEPT ± 1.0 AS NOTED	日本エー・エム・ピー株式会社 TOKYO, JAPAN
仕上 (FINISH) 色: 表参照 HOUSING COLOR: SEE TABLE	DR. K. yama 20/81 CHK. A. taniguchi 4/21/81 DE. APP.	
名称 (NAME) MINI-UNIVERSAL MATE-N-LOK CONN CAP HOUSING 12 Pos. (UL94V-2) 12 極 ミニユニバーサル X 12 極 ロック コネクタ キャップハウジング (UL94V-2)		番号 (NO.) <b>C-172333</b>
尺度 (SCALE) 2:1	REV. A2	SHEET #

単位: 概 DIMENSIONS IN MM DO NOT SCALE PRINT