
Email







Share

Print

Pricing & Availability

Request Sample

Distributor

Add to My Part List

Buy Product through

Related Products

you're looking for?

Find Similar Products

View Part in Product Feature Selector


Check for Tooling

Not quite the product

Products Industries Resources About TE My Account Innovation Support Center

Home > Products > > 5 amps < 10 amps Circuit Max. > Product Feature Selector > Product Details

1-1969613-0 Product Details

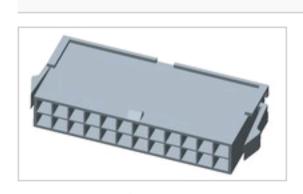

Active

Niew 3D PDF

VAL-U-LOK Series Connector System


10P PM PLUG VAL-U-LOK V0

1-1969613-0

TE Internal Number: 1-1969613-0

Product Highlights View All

- Wire-to-Panel/Wire-to-Wire
- Applies To Panel, Applies To Wire/Cable
- Connector
- Glow Wire Rating = Standard Part Not Glow Wire

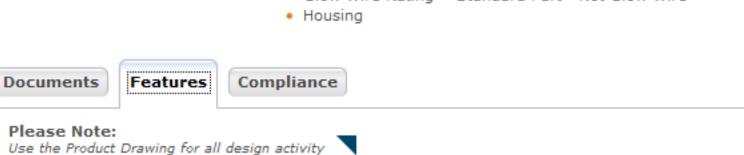

Product Type Features		Configuration Features	
Product Type	Connector	Number of Positions	10
Connector Type	Housing	Number of Rows	2
PCB Mount Alignment	Without		
PCB Mount Retention	Without	Industry Standards	
CSA File Number	208567	RoHS/ELV Compliance	RoHS compliant, ELV compliant
Mechanical Attachment		Lead Free Solder Processes ?	Not reviewed for lead free solder process
Mating Retention Type	Latch(ing)	RoHS/ELV Compliance History	Always was RoHS compliant
Electrical Characteristics		UL Flammability Rating	UL 94V-0
Operating Voltage	AC	Agency/Standard	CSA, UL
Reference		UL Rating	Recognized
Operating Voltage (VAC)	600	UL File Number	E28476
Dimensions		Environmental	
Length (X-Axis) (mm [in])	22.20 [0.874]	Operating Temperature (°C [°F])	-40 - +105 [-40 - +221]
Width (Z-Axis) (mm [in])	23.00 [0.9055]	Conditions for Usage	
Profile Height (Y-Axis) (mm [in])	11.60 [0.4567]	Applies To	Panel, Wire/Cable
		Glow Wire Rating	Standard Part - Not Glow Wire
Body Features			
Mating Retention	With	Operation/Application	
			Wire-to-Panel/Wire-

UL File Number	E28476
Environmental	
Operating Temperature (°C [°F])	-40 - +105 [-40 - +221]
Conditions for Usage	
Applies To	Panel, Wire/Cable
Glow Wire Rating	Standard Part - Not Glow Wire
Operation/Application	
Application Use	Wire-to-Panel/Wire- to-Wire
Pick and Place Cover	Without
Packaging Features	
Packaging Method	Bag/Box
Other	
Brand	TE Connectivity
Node Classification	Rectangular Connector Housings

Pin

Plug

With

Natural

4.20 [0.165]

Polarization Cavity

Quick Links

Site Map

Distributor Inventory

Product Cross Reference

Product Compliance Support Center

Documents & Drawings

Corporate Information			
About TE			
Investors			
News Room			
Supplier Portal			
Careers			
Terms & Conditions			

Contact Features

Housing Features

Centerline (mm [in])

Mating Alignment Type

Connector Style

Mating Alignment

Housing Color

Contact Type

Terms & Conditions Privacy Policy Global Accessibility Statement **Customer Support**

Email or Chat With Us Find a Phone Number Knowledge Base Manage Your Account



