


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
BD	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		AC1		REVISED PER ECO-11-005027	11MAR11	RK	HMR

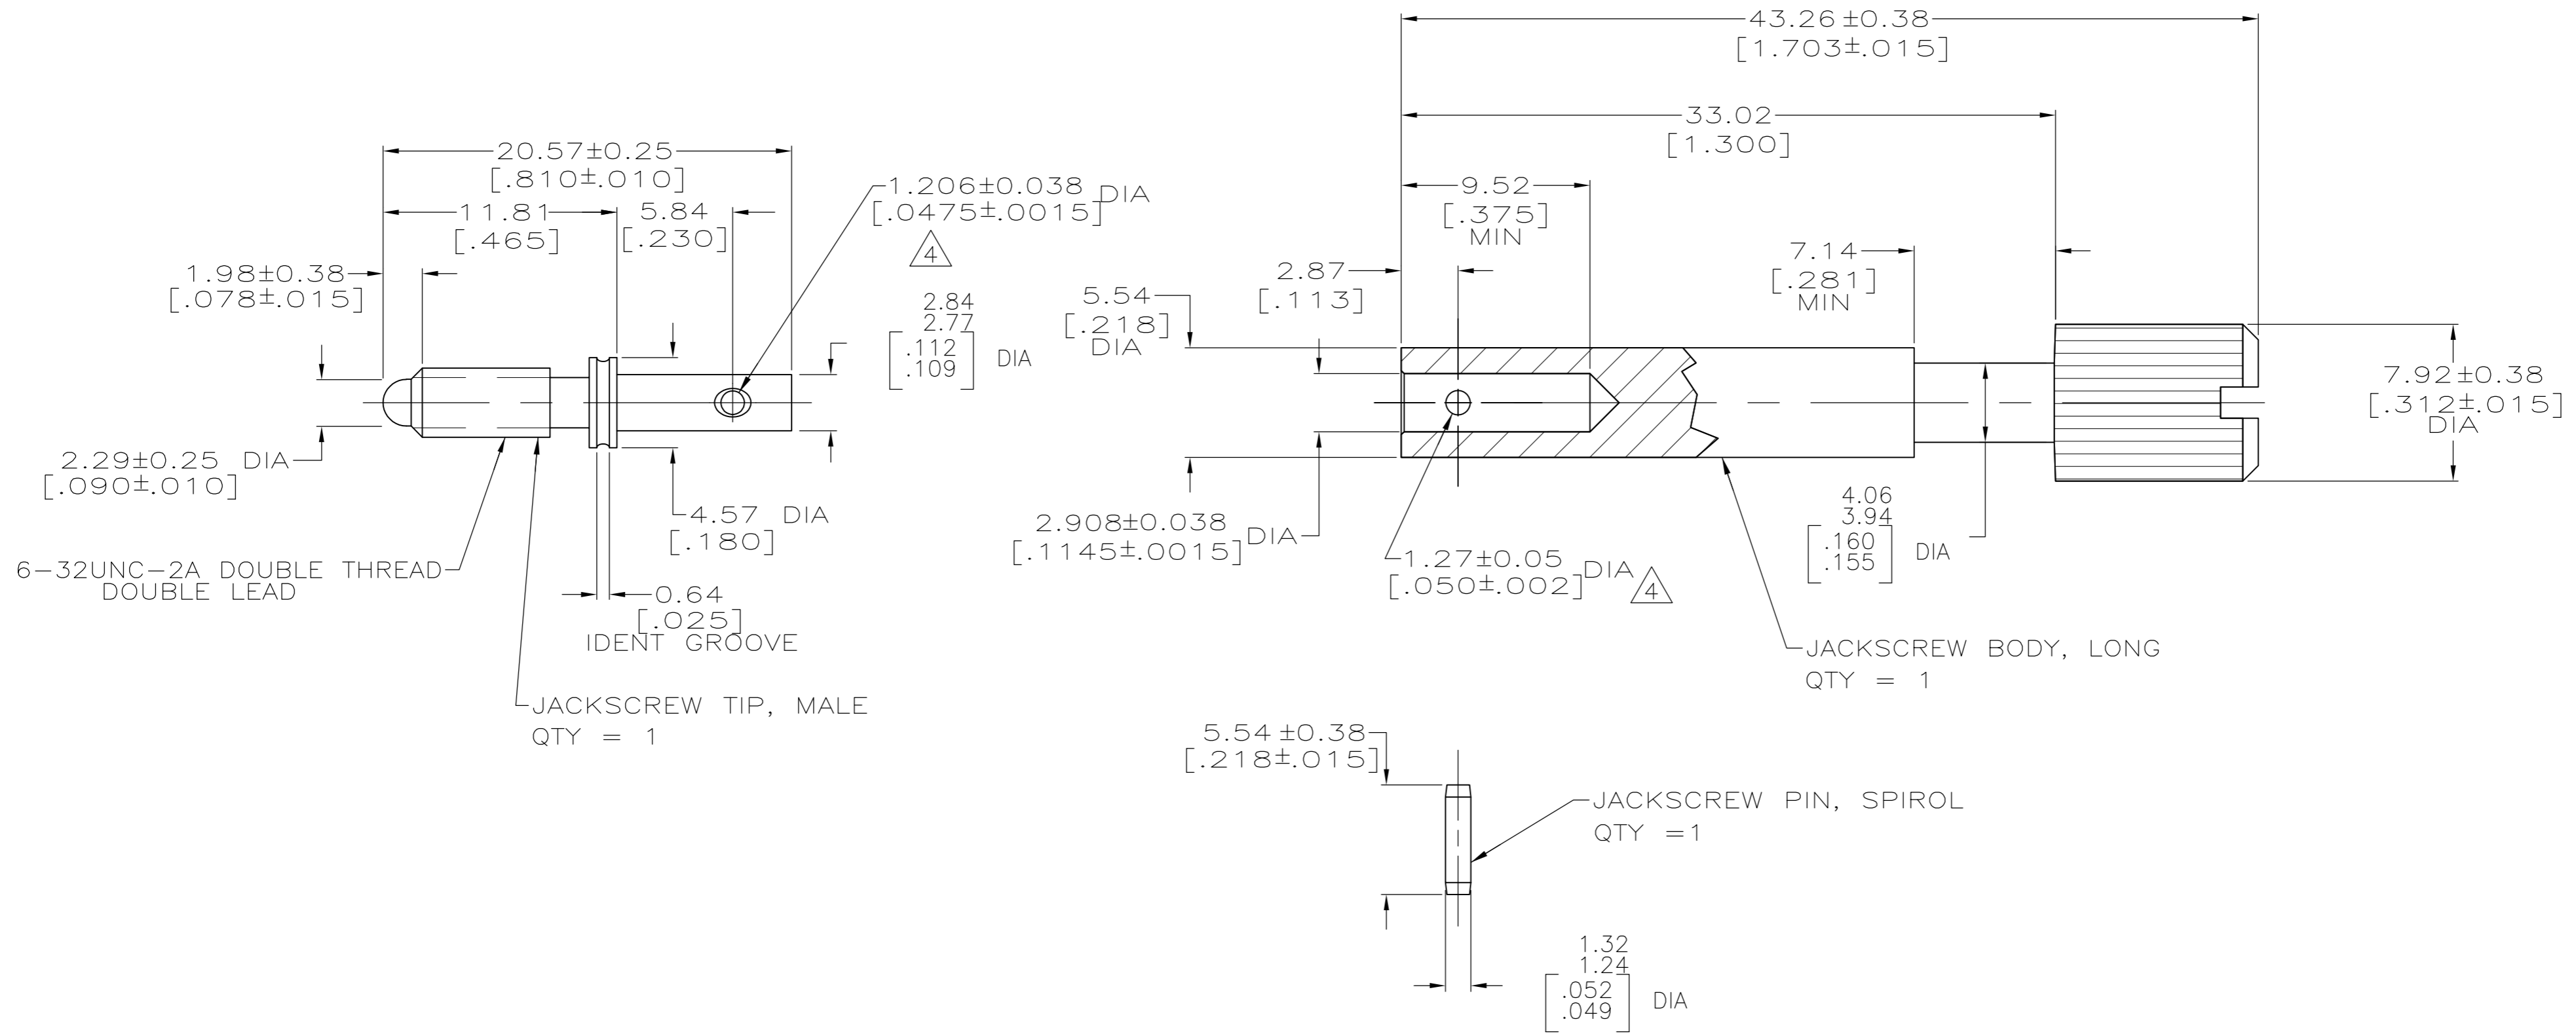

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ± 0.07 [.003] OF THE 5.54 [.218] DIA AND THE $2.77/2.84$ [.109 / .112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

6	1-200871-0
6	200871-1
NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/23/94	TE Connectivity		
DIMENSIONS: mm		CHK	R.STONE	06/16/94			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-	NAME		
0 PLC	± -	PRODUCT SPEC	-	-	JACKSCREW KIT, UNASSEMBLED, MALE, M SERIES		
1 PLC	± -	APPLICATION SPEC	-	-	SIZE	CAGE CODE	DRAWING NO
2 PLC	± 0.13 [.005]	WEIGHT	-	-	A2	00779	C=200871
3 PLC	± -	CUSTOMER DRAWING	-	-	SCALE	SHEET	REV
4 PLC	± -				4:1	1 OF 1	AC1
ANGLES	± -						
MATERIAL	JACKSCREW BODY: 1	FINISH	JACKSCREW BODY: 2	JACKSCREW PIN: PASSIVATED			
	JACKSCREW TIP: 3						
	JACKSCREW PIN: 4						