


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
BD		0		P	LTR	DESCRIPTION	DATE	DWN	APVD
				AC1		REVISED PER ECO-11-005027	11MAR11	RK	HMR

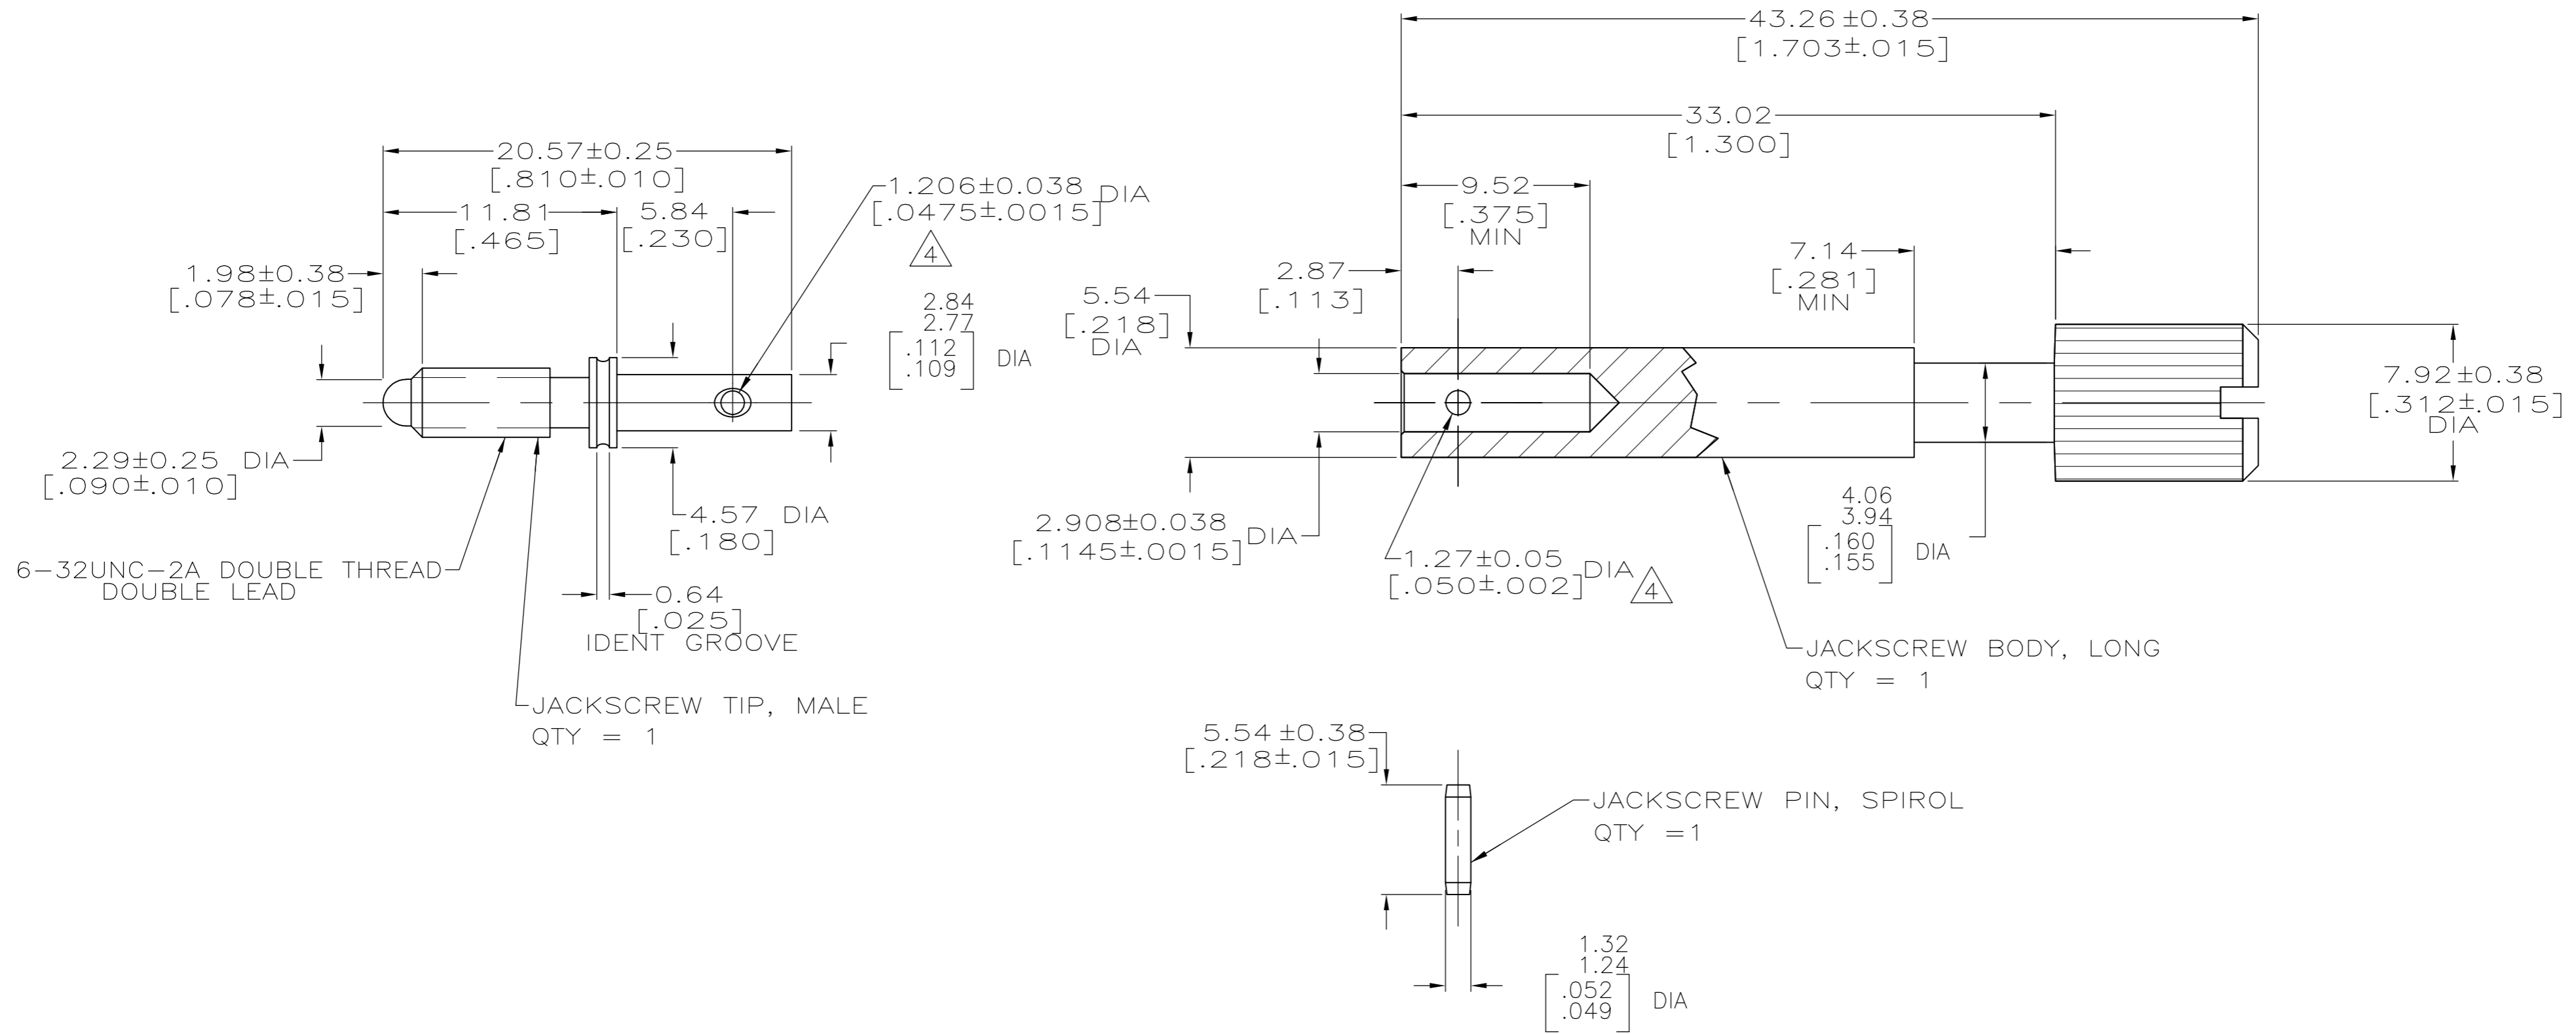

- 1 ZINC.
- 2 STAINLESS STEEL.
- 3 TO ASSEMBLE JACKSCREW REFER TO INSTRUCTION SHEET #1189.
- 4 HOLE CENTRALLY LOCATED WITHIN ±0.07 [.003] OF THE 5.54 [.218] DIA AND THE 2.77/2.84 [.109/.112] DIA CENTER LINES.
- 5 CHROMATE CONVERSION CLEAR.
- 6 NON-HEXAVALENT CHROMATE COATING ON JACKSCREW BODY.

6	1-200871-0
6	200871-1
NOTES	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	K.FOLTZ	05/23/94	 TE Connectivity	
DIMENSIONS:		CHK	R.STONE	06/16/94		
mm		APVD	-	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	-	-		
0 PLC	± -	APPLICATION SPEC	-	-	NAME	JACKSCREW KIT, UNASSEMBLED, MALE, M SERIES
1 PLC	± -	WEIGHT	-	-	SIZE	A2
2 PLC	± 0.13 [.005]	CAGE CODE	00779	C=200871	DRAWING NO	C=200871
3 PLC	± -	RESTRICTED TO	-	-	SCALE	4:1
4 PLC	± -				SHEET	1 OF 1
ANGLES	± -				REV	AC1
MATERIAL	JACKSCREW BODY: 1	FINISH	JACKSCREW BODY: 2	JACKSCREW PIN: PASSIVATED	CUSTOMER DRAWING	