

New

.125 Power Blade and Receptacle

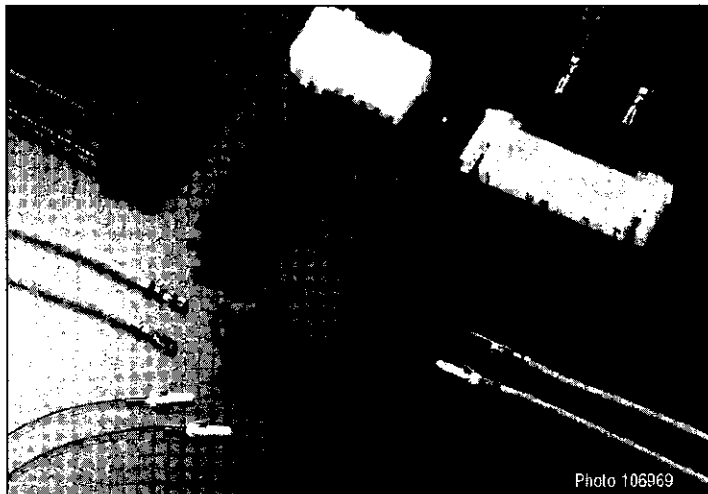


Photo 106969

Description/ Applications

- The .125 power blade and receptacle system is rated from 12 amps in an 18 AWG application up to 18 amps in a 14 AWG application
- A motor mount, wire-to-wire or wire-to-board product family that can be adapted to various automation levels
- Used primarily within appliance industry applications for transmission of signal and power, examples would include washer, dryer, and dishwasher timer devices, as well as motor direct connect applications

Product Strengths

- Both contacts offer stamped metal latches for increased contact to housing retention
- Improved contact alignment, positioning and housing lead-in features that dramatically reduce the likelihood of contact stubbing and back-out
- Extraction hand tooling is available for use in the removal of blade and receptacle contacts incorrectly positioned

Availability/ Part Numbers

521177-1	3 position plug	1217039-1	receptacle contact
521178-1	3 position cap	521183-1	24 position Delta Hsg.
521179-1	6 position temp. switch	521157-1	24 position right hand Hsg.
521180-1	10 position motor hsg.	521184-1	24 position left hand Hsg.
521181-1	3 position pressure switch	521185-1	18 position right hand Hsg.
521182-1	3 position cap	521186-1	18 position right hand Hsg.
1217076-1	blade contact 20-14 AWG	1217029-1	blade contact 400-1600 CMA
1217077-1	blade contact 22-18 AWG		

For More Information

Chris Fox, Product Manager
717-985-2458
Fax: 717-986-5898
cfox@amp.com

Don Decker, Product Engineer
717-986-7887
Fax: 717-986-5898
dfdecker@amp.com

Connecting
at a
HIGHER
level.

AMP