


## 1217539 -1 Product Details

**Live Product Chat** US Only  
8:30am - 5pm ET, Mon - Fri

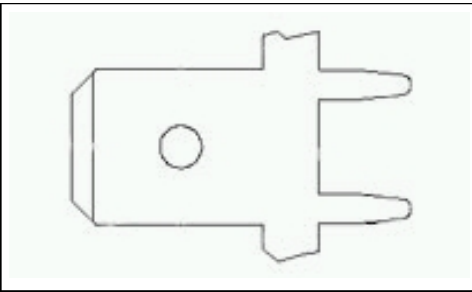

**1217539 -1**

[Active](#)

### Quick Disconnect Tabs, Tab Adapters & Tab Caps

[Always EU RoHS/ELV Compliant](#) ( [Statement of Compliance](#) )

#### Product Highlights:

- ? [Tab](#)
- ? [Tab Type = Printed Circuit Board](#)
- ? [Tab Fit = 6.35 x 0.81 mm](#)
- ? [Brass Material](#)
- ? [Tin Finish](#)

[View all Features](#) | [Find Similar Products](#)

#### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- ? [TAB, FASTON, PC BOARD, 6.35 \[.250\] SERIES](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- ? None Available

#### Product Specifications:

- ? None Available

#### Application Specifications:

- ? None Available

#### Instruction Sheets:

- ? None Available

#### CAD Files:

- ? None Available

#### Additional Information:

- ? [Product Line Information](#)

#### Related Products:

- ? [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- ? [Product Type](#) = Tab
- ? [Tab Fit \(mm \[in\]\)](#) = 6.35 x 0.81 [.250 x .032]
- ? [Material](#) = Brass
- ? [Finish](#) = Tin
- ? [Mount Angle](#) = Straight
- ? [Insulation Support](#) = Without
- ? [PCB Hole Diameter \(mm \[in\]\)](#) = 1.40 [0.055]
- ? [PCB Thickness \(mm \[in\]\)](#) = 1.57 [0.062]
- ? [Comment](#) = Insertion equipment available.

#### Electrical Characteristics:

- ? [Dimple](#) = Without

#### Termination Related Features:

- ? [Height \(mm \[in\]\)](#) = 13.39 [0.527]

#### Body Related Features:

- ? [Tab Type](#) = Printed Circuit Board
- ? [Stud Hole](#) = Without
- ? [Stock Thickness \(mm \[in\]\)](#) = 0.81 [0.032]

#### Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? [RoHS/ELV Compliance History](#) = Always was RoHS compliant

#### Packaging Related Features:

- ? [Packaging Method](#) = Strip

#### Other:

- ? [Brand](#) = AMP