


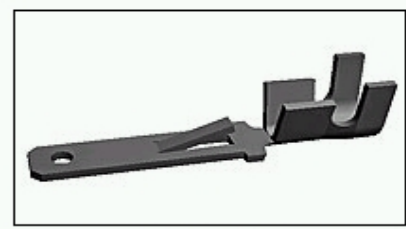

# 1-293041-2 Product Details

[Share](#) | [Print](#) | [Email](#)


1-293041-2

TE Internal Number: 1-293041-2

Active

[View 3D PDF](#)

## Multiple Circuit Housings with Tabs & Receptacles

Always EU RoHS/ELV Compliant (Statement of Compliance)

### Product Highlights:

- Contact
- Contact Type = Tab
- Mating Area Interface Dimensions = 6.35 x 0.80 mm
- Wire Range = 0.35-1.00<sup>2</sup> [28-17] mm [AWG]
- Insulation Diameter = 2.03 [.080] Max. mm [in]

[View all Features](#)

### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information	
<p><b>Product Drawings:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">FASTIN-FASTON* Connector, 6.3 mm SR. TAB CONTACT (PDF, English)</a></li> </ul> <p><b>Catalog Pages/Data Sheets:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>Product Specifications:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">FASTIN-FASTON CONN. .110 INCH, .187 INCH, .250 INCH,... (PDF, English)</a></li> </ul> <p><b>Application Specifications:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">FASTIN-FASTON* Connectors, 6.3 mm series TAB CONTACT. (PDF, Italian)</a></li> </ul> <p><b>Instruction Sheets:</b></p> <ul style="list-style-type: none"> <li>• None Available</li> </ul> <p><b>CAD Files: (CAD Format &amp; Compression Information)</b></p> <ul style="list-style-type: none"> <li>• <a href="#">2D Drawing (DXF, Version B1)</a></li> <li>• <a href="#">3D Model (IGES, Version B1)</a></li> <li>• <a href="#">3D Model (STEP, Version B1)</a></li> </ul>	<p><b>Related Products:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">Tooling</a></li> </ul>

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p><b>Product Type Features:</b></p> <ul style="list-style-type: none"> <li>• Product Type = Contact</li> <li>• Wire/Cable Type = Regular Wire</li> <li>• Finish = Pre-Tin</li> <li>• Insertion Force = Normal</li> <li>• Insulation Support = With</li> <li>• FASTON = Yes</li> </ul> <p><b>Termination Features:</b></p> <ul style="list-style-type: none"> <li>• Crimp Type = F-Crimp</li> </ul> <p><b>Dimensions:</b></p> <ul style="list-style-type: none"> <li>• Mating Area Interface Dimensions (mm [in]) = 6.35 x 0.80 [.250 x .031]</li> <li>• Insulation Diameter (mm [in]) = 2.03 [.080] Max.</li> </ul> <p><b>Body Features:</b></p> <ul style="list-style-type: none"> <li>• Wire Range (mm [AWG]) = 0.35-1.00<sup>2</sup> [28-17]</li> <li>• Material = Brass</li> </ul>	<p><b>Contact Features:</b></p> <ul style="list-style-type: none"> <li>• Contact Type = Tab</li> </ul> <p><b>Industry Standards:</b></p> <ul style="list-style-type: none"> <li>• <a href="#">RoHS/ELV Compliance</a> = RoHS compliant, ELV compliant</li> <li>• <a href="#">Lead Free Solder Processes</a> = Not relevant for lead free process</li> <li>• <a href="#">RoHS/ELV Compliance History</a> = Always was RoHS compliant</li> </ul> <p><b>Packaging Features:</b></p> <ul style="list-style-type: none"> <li>• Packaging Method = Reel</li> <li>• Packaging Quantity = 3,000/Reel</li> </ul> <p><b>Other:</b></p> <ul style="list-style-type: none"> <li>• Line = FASTIN-FASTON .250</li> <li>• Brand = AMP</li> <li>• Comment = Without Hole</li> </ul>

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)

### Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference Products](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed

Receive TE News, Events & Technology Updates

