


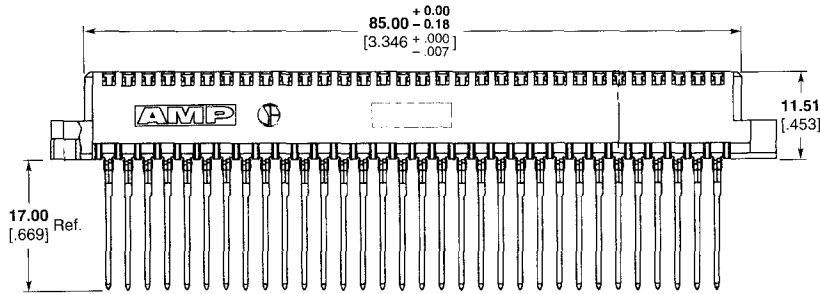
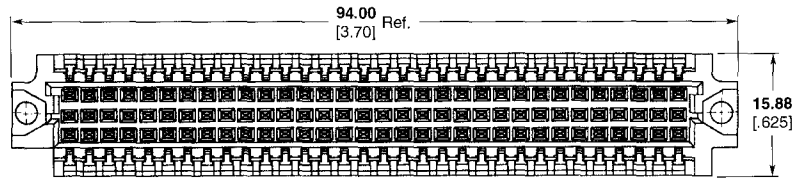


**Enhanced Type C Vertical Receptacle Assemblies
VME64X ACTION PIN Contacts**

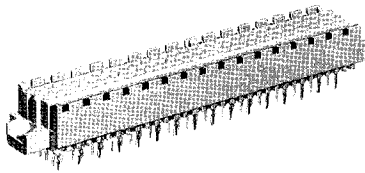

2.54 Typ. [.100]

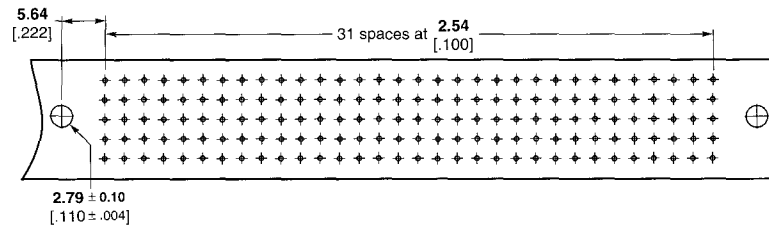

Material

Housing — Glass filled polymer

Receptacle Contacts — Copper alloy

Ground Contacts — Copper alloy

Related Product Data

Electrical/Mechanical Data —

Page 11

PC Board Hole Layout — Page 59

Type C Assemblies

Number of Positions	Rows Loaded	DIN Levels	ACTION PIN Contacts	
			6.00 [.236] Lead Length	17.00 [.669] Lead Length
160	A,B,C	II	148452-5	1-148445-5

Shroud

PCB Thickness	Part Number
0.125 .005	148527-1

