




1-5406203-2 Product Details

[Share](#) [Print](#) [Email](#)

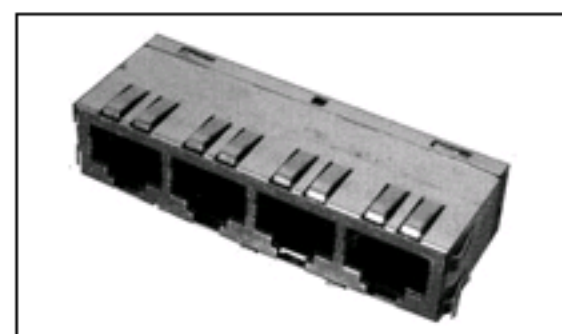

1-5406203-2

PCB Mounted Jacks - Single Port, Multi-port and Stacked

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Connector
- Preloaded
- Multiple Port Configuration
- 1 x 4 Jack Configuration
- Jack Type = RJ45

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 1-5406203-2

Active

[View 3D PDF](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [MODULAR JACK ASSEMBLY, 4 PORT, 8 POSITION, SHIELDED,...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [High Performance Modular Plugs & Jacks, PCB Mounted](#) (PDF, English)

Application Specifications:

- [Modular Jacks](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version D)
- [3D Model](#) (IGES, Version D)
- [3D Model](#) (STEP, Version D)

[List all Documents](#)

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Panel Cutout](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Termination Method to PC Board = Solder
- Performance Category = Cat 5e
- LED = Without
- Grounding Options = Panel Ground and PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black
- Shield Material = Copper Zinc Alloy

Mechanical Attachment:

- [Panel Mount Retention](#) = Without

Electrical Characteristics:

- [Shielded](#) = Yes

Termination Features:

- [Solder Tail Contact Plating](#) = Tin over Nickel

Dimensions:

- [PCB Tail Length](#) (mm [in]) = 2.54 [0.100]

Body Features:

- [Inverted Jack Face](#) = No
- [Shield Plating](#) = Tin over Copper
- [Number of Contacts Loaded, RJ45](#) (8 Positions) = 8
- [PCB Ground Tab Location](#) (mm [in]) = 4.57 [0.180]

Contact Features:

- [Contact Plating, Mating Area, Material](#) = Gold (50)
- [Contact Base Material](#) = Phosphor Bronze

Housing Features:

- [Housing Material](#) = High Temperature Nylon
- [UL Flammability Rating](#) = UL 94V-0

Configuration Features:

- [Preloaded](#) = Yes
- [Port Configuration](#) = Multiple
- [Jack Configuration](#) = 1 x 4
- [Number of Positions](#) = 8
- [Number of Contacts Loaded](#) = 8
- [Number of PCB Ground Tabs](#) = 2
- [Number of Panel Ground Tabs](#) = 15

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Packaging Features:

- [Packaging Method](#) = Tray
- [Packaging Quantity](#) = 20

Product Availability:

- [Region](#) = Asia, North America

Other:

- [Brand](#) = AMP

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

