


## 1742428-1 Product Details


**Live Product Chat** US Only  
 8:30am - 5pm ET, Mon - Fri

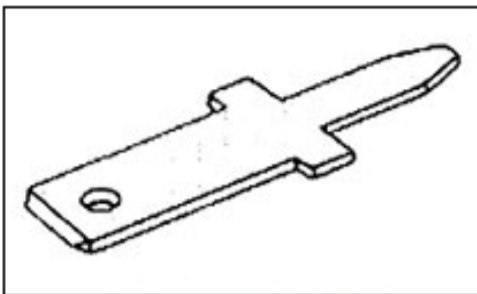

**1742428-1**

TE Part Number: 1742428-1

 [Active](#)

 [Add to Part List](#)

### Quick Disconnect Tabs, Tab Adapters & Tab Caps

 [Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

#### Product Highlights:

- Tab
- Tab Type = Printed Circuit Board
- Tab Fit = 2.79 x 0.51 mm
- Brass Material
- Tin Finish

[View all Features](#) | 
 [Find Similar Products](#)

#### Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [TAB, FASTON, PC BOARD, 2.79 \[.110\] SERIES](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version A1)
- [3D Model](#) (IGES, Version A1)
- [3D Model](#) (STEP, Version A1)

[List all Documents](#)

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [Product Type](#) = Tab
- [Tab Fit \(mm \[in\]\)](#) = 2.79 x 0.51 [.110 x .020]
- [Material](#) = Brass
- [Finish](#) = Tin
- [Mount Angle](#) = Straight
- [Insulation Support](#) = Without
- [PCB Hole Diameter \(mm \[in\]\)](#) = 1.17 [0.046]
- [PCB Thickness \(mm \[in\]\)](#) = 1.57 [0.062]
- [CSA Certified](#) = Yes
- [Comment](#) = Insertion machine available.

#### Electrical Characteristics:

- [Dimple](#) = Without

#### Body Related Features:

- [Tab Type](#) = Printed Circuit Board
- [Stud Hole](#) = Without
- [UL Rating](#) = Recognized

#### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

#### Packaging Related Features:

- [Packaging Method](#) = Strip

#### Other:

- [Brand](#) = AMP