


175224-1 Product Details


[Live Product Chat](#) US Only
 8:30am - 5pm ET, Mon - Fri

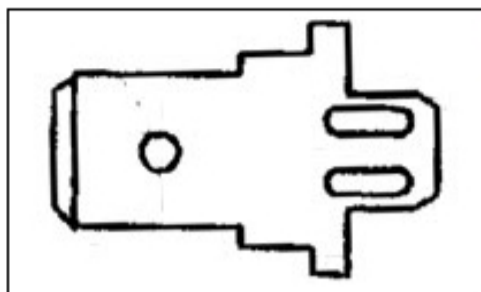

175224-1

TE Part Number: 175224-1

 [Active](#)

 [Add to Part List](#)

Quick Disconnect Tabs, Tab Adapters & Tab Caps

 [Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- Tab
- Tab Type = Printed Circuit Board
- Tab Fit = 6.35 x 0.81 mm
- Brass Material
- Tin Finish

[View all Features](#) | [Find Similar Products](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [250 TAB](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version 0)
- [3D Model](#) (IGES, Version 0)
- [3D Model](#) (STEP, Version 0)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Tab
- [Tab Fit \(mm \[in\]\)](#) = 6.35 x 0.81 [.250 x .032]
- [Material](#) = Brass
- [Finish](#) = Tin
- [Mount Angle](#) = Straight
- Insulation Support = Without
- [PCB Hole Diameter \(mm \[in\]\)](#) = 3.49 [0.137]
- [PCB Thickness \(mm \[in\]\)](#) = 1.57 [0.062]

Electrical Characteristics:

- [Dimple](#) = Without

Body Related Features:

- [Tab Type](#) = Printed Circuit Board
- Stud Hole = Without

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Packaging Related Features:

- [Packaging Method](#) = Loose Piece

Other:

- Brand = AMP