



MICTOR Vertical Plugs, 0.64 [.025] Pitch


6.60 [.260]
Stacking Height

Related Product Data:

- Material and Finish — page 28
- Performance Characteristics — page 28
- Mating Receptacles — page 36

**Technical Documents
(Page 70):**

AMP Product Specification
108-1422

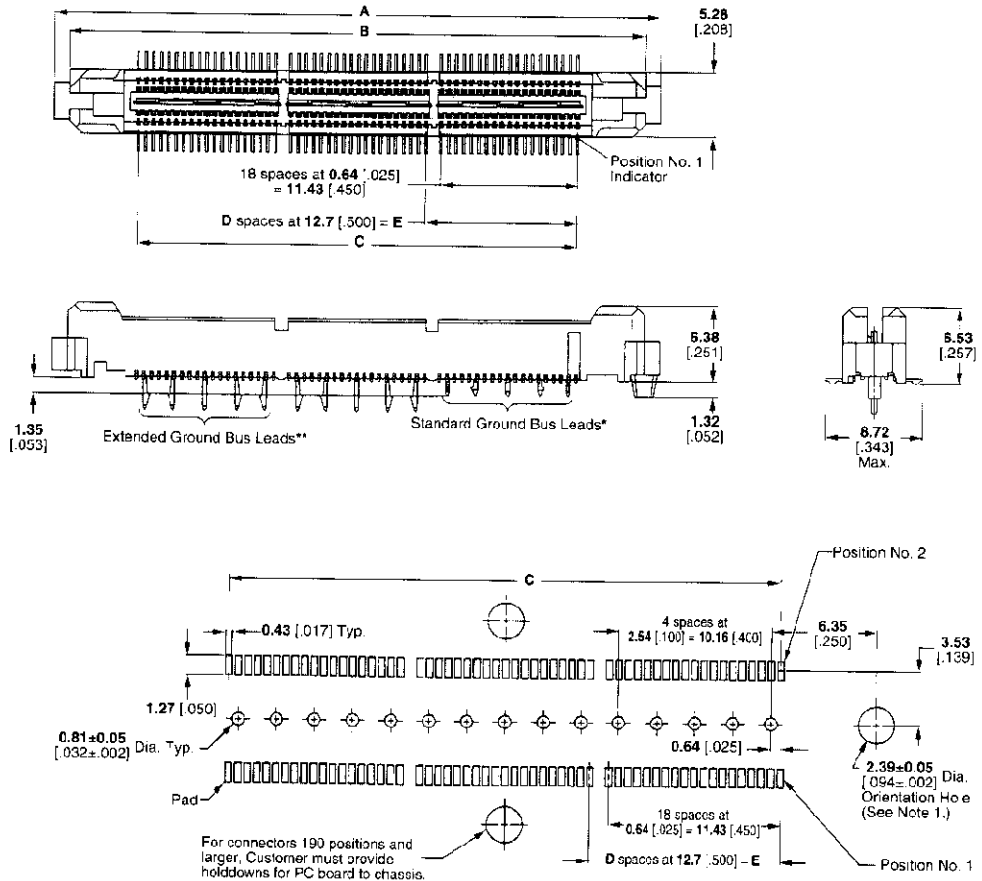

**Recommended PC Board Layout
(Connector Side of Board Shown)**

No. of Positions	Dimensions					Plug Part Numbers	
	A	B	C	D	E	Gold Plating	Palladium-Nickel Plating
38	25.40 1.000	22.81 .898	11.43 .450	0	—	767007-8	767056-1
76	38.10 1.500	35.51 1.398	24.13 .950	1	12.70 .500	767007-9	767056-2
114	50.80 2.000	48.21 1.898	36.83 1.450	2	25.40 1.000	1-767007-0	767056-3
152	63.50 2.500	60.91 2.398	49.53 1.950	3	38.10 1.500	1-767007-1	767056-4
190	76.20 3.000	73.61 2.898	62.23 2.450	4	50.80 2.000	1-767007-2	767056-5
228	88.90 3.500	86.31 3.398	74.93 2.950	5	63.50 2.500	1-767007-3	767056-6
266	101.60 4.000	99.01 3.898	87.63 3.450	6	76.20 3.000	1-767007-4	767056-7

*One ground bus with 5 tails per each 38-position module.
 **Plugs with extended ground bus leads can be made available, consult AMP.
Notes: 1. For dual application, the orientation hole must be 1.98 ± 0.03 [.078 ± .001]. See Application Specification 114-11004 for details.
 2. For right-angle plugs, see AMP catalog 65194.

**MICTOR
Connectors**