


179316-4 Product Details

Share | Print | Email

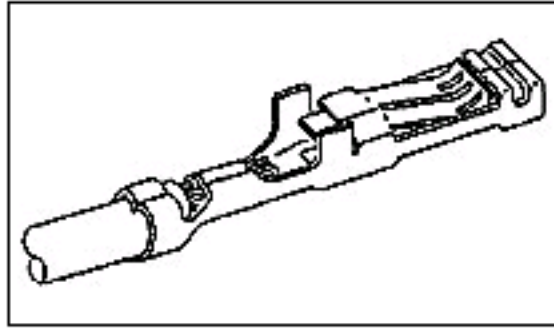

179316-4

TE Internal Number: 179316-4

Active

Drawer Connectors

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Contact
- Receptacle
- Wire Range = 0.50-1.25² [20-16] mm [AWG]
- Accepts Wire Insulation Diameter, Range = 1.60 - 2.80 mm
- Packaging Method = Reel

[View all Features](#)

[Add to My Part List](#) | Request Sample | Find Similar Products | Buy Product

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [RECEPTACLE CONTACT HYBRID MINI DRAWER CONNECTOR](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [Hybrid Mini Drawer Connector](#) (PDF, English)
- [Hybrid SF Drawer Connector](#) (PDF, English)
- [8P/12P DRAWER CONNECTOR](#) (PDF, English)
- [AMP MINI CT HYBRID DRAWER CONNECTOR \(1.5MM PITCH\)](#) (PDF, English)
- [1.5mm PITCH MINI CT HYBRID DRAWER CONNECTOR 26P \(AC6...\)](#) (PDF, English)
- [HYBRID MINI DRAWER CONNECTOR, LEAD FREE VERSION](#) (PDF, Japanese)

Application Specifications:

- [Crimping Hybrid Mini Drawer Connector Power Line Contact](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Contact
- [Gender](#) = Receptacle

Electrical Characteristics:

- [High Current](#) = No

Body Features:

- [Wire Range \(mm \[AWG\]\)](#) = 0.50-1.25² [20-16]
- Crimp Barrel Plating = Tin

Contact Features:

- Contact Finish = Gold (15) over Nickel (50)
- Contact Base Material = Copper Alloy
- Contact Configuration = Crimp Snap-In

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- [Accepts Wire Insulation Diameter, Range \(mm \[in\]\)](#) = 1.60 - 2.80 [0.063 - 0.110]

Packaging Features:

- [Packaging Method](#) = Reel

Other:

- Brand = AMP

Corporate Information

[Who We Are](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)

Quick Links

[Check Distributor Inventory](#)
[Cross Reference](#)
[Find Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Search Knowledge Base](#)
[Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

