


1825276 -2 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

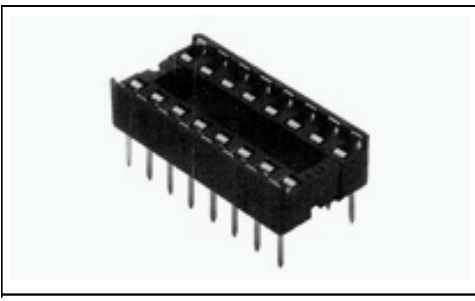

1825276 -2

[Active](#)

DIP Sockets

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? [DIP Socket](#)
- ? [Number of Positions = 32](#)
- ? [Row-to -Row Spacing = 15.49 mm](#)
- ? [Thru Hole](#)
- ? [Mount Style = Vertical](#)

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [SOCKET ASSY, DIP, OTC, HT DIPLOMATE](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? [Surface -Mount DIPLOMATE Dual Leaf \(DL\) In -Line Pakca...](#) (PDF, English)
- ? [DIPLOMATE DL \(DUAL LEAF\) DIP SOCKET \(REFLOW COMPATIBLE\)](#) (PDF, English)

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = DIP Socket
- ? [Number of Positions](#) = 32
- ? [Profile](#) = Over -The -Component
- ? [Frame Style](#) = Open
- ? [Leg Style](#) = Retention
- ? Proprietary Name = DIPLOMATE DL
- ? Color = Black

Electrical Characteristics:

- ? [Insulation Resistance \(M?\)](#) = 10,000
- ? [Contact Resistance \(m?\)](#) = 30

Termination Related Features:

- ? [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.25 [0.128]
- ? [Solder Tail Contact Plating](#) = Tin

Body Related Features:

- ? [Row-to -Row Spacing \(mm \[in\]\)](#) = 15.49 [0.610]
- ? [Mount Style](#) = Vertical
- ? [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]

Contact Related Features:

- ? [Contact Mount](#) = Thru Hole
- ? [Contact Material](#) = Phosphor Bronze
- ? [Contact Mating Area Plating](#) = Gold (15)
- ? [Contact Style](#) = Stamped + Formed
- ? [Mating Contact Type](#) = Dual Leaf

Housing Related Features:

- ? [Housing Material](#) = Thermoplastic Glass Reinforced
- ? [Housing Flammability Rating](#) = UL 94V -0

Configuration Related Features:

- ? [Height Above PC Board \(mm \[in\]\)](#) = 5.33 [0.210]

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Conditions for Usage:

- ? [Temperature Range \(°C\)](#) = 125

Operation/Application:

- ? [Application](#) = Production

Packaging Related Features:

- ? [Packaging Method](#) = Tube

Other:

- ? [Brand](#) = Tyco Electronics