


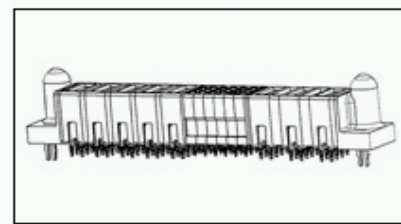

1892430-5 Product Details

[Share](#) | [Print](#) | [Email](#)


1892430-5

MULTI-BEAM XL and MULTI-BEAM XLE Connectors

Always EU RoHS/ELV Compliant (Statement of Compliance)

- Product Highlights:**
- Product Series = XL
 - Board-to-Board
 - Connector Assembly
 - Connector Style = Receptacle
 - Contact Type = Socket

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 1892430-5
 Active

[View 3D PDF](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [VERTICAL RECEPTACLE ASSEMBLY PRESS FIT,W/GUIDES MULT... \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- [2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1 \(PDF, English\)](#)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version D1\)](#)
- [3D Model \(IGES, Version D1\)](#)
- [3D Model \(STEP, Version D1\)](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Series = XL
- Connector Type = Connector Assembly
- Mount Angle = Vertical
- Termination Style = Solder
- Mating Type = Blindmate
- PCB Mount Retention = With
- PCB Mount Retention Type = Boardlock(s)
- Guides = With

Electrical Characteristics:

- Voltage Rating (Signal) (VAC) = 60
- Voltage Rating (Power) (VDC) = 200

Termination Features:

- Termination Post Length (mm [in]) = 3.43 [0.135]

Body Features:

- Sequencing = No

Contact Features:

- Contact Type = Socket
- Contact Material (Power) = High Conductivity Copper
- Contact Material (Signal) = Copper Alloy
- Contact Plating, Mating Area, Material = Gold (30)

Housing Features:

- Connector Style = Receptacle
- Housing Material = High Temperature Thermoplastic
- Centerline, DC Module (mm [in]) = 6.35 [0.250]
- Centerline, Matrix (mm [in]) = 2.54 x 2.54 [.100 x .100]

Configuration Features:

- Total Number of DC Power = 4
- Total Number of AC Power = 0
- Total Number of Coax = 0
- Total Number of Signal = 24
- Connector Configuration Orientation = Left-to-Right
- Mating Functionality = Standard
- Connector Contact Configuration (No. of Pos./Type) = 2/DC Power, 24/Signal, 2/DC Power

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 260°C, Wave solder capable to 240°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Operation/Application:

- Application Use = Board-to-Board

Other:

- Brand = AMP
- Comment = For additional configurations available, contact Tyco Electronics.