

Plugs, Boots and Caps

Sealing Plugs

Size 22
Part Number 204760-1
White TEFLON



Size 20
Part Number 203839-1
Red thermoplastic



Size 16
Part Number 203839-2
Blue thermoplastic



Size 12
Part Number 205574-1
Yellow thermoplastic



Coaxial Sealing Plug and Boot

Size 5
Plug—Part Number 205975-1



Boot for RG-58C cable—
Part Number 205402-2
Boot for RG-180, -190 cable—
Part Number 205402-3



Dust Covers

Conductive Receptacle Cap
Part Number 445918-1
Conductive Plug Cap
Part Number 447162-1



Plug Cap
Part Number 205282-1




Receptacle Cap
Part Number 205283-1



Rack and Panel Connectors

106-Contact Inserts for Flexible Flat Cable

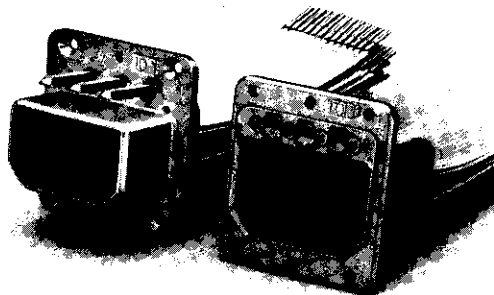

These custom-made assemblies use AMP Flexible Flat Conductor Cable which has .050 [1.27] wide conductors, .003 [0.08] thick, on .100 [2.54] centers (or similar, customer-specified cable). The inserts mate

with 106-contact inserts, shown on page 3041, with size 22 contacts.

The adaptability of flexible flat cable to many uses, the wide variety of contact styles available, and the high quality of AMP assembled har-

nesses make these inserts particularly attractive. Among their outstanding features are that they require no soldering, welding or potting, and the inserts are repairable by replacement of individual cables.


Flexible Flat Conductor Cable

■ Recognized under the Component Program of Underwriters Laboratories Inc., File No. E53793



Specifications

- Temperature Rating** — -67°F to 221°F [-55°C to +105°C]
- Voltage Rating** — 300 volts per UL Style No. 2646
- Current Rating** — 3 amperes, equivalent 27 AWG [0.1 mm²]
- Insulation Resistance** — 5000 megohms (min.)
- Insulation Material** — Polyester
- Flammability** — Self-extinguishing per applicable UL requirement

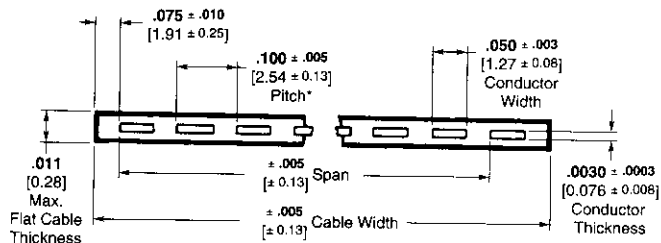

*Tolerance non-cumulative

Consult Tyco Electronics for additional information.