

Circular Plastic Connector Sealing Accessories (Continued)

Sealing Caps – for Receptacles only

Sealing caps are used to protect exposed contacts of unmated receptacles.


Material and Finish:

Cap—Thermoplastic, heat stabilized, fire resistant, self-extinguishing, 94V-1 rated, black

Sealing Gasket—Neoprene, black

Bead Chain—Steel, nickel plated

Bead Chain Coupling—Brass, plated nickel

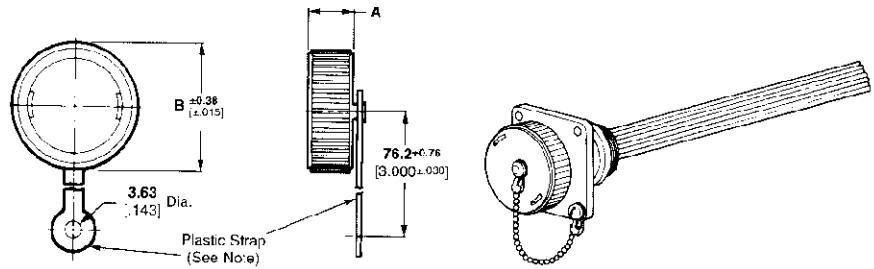


Shell Size	Series	Dimensions		Plastic Strap Part No.	Metal Bead Chain Part No.
		A	B		
11	1 & 2	9.14	23.55	206903-1	208800-1
		.360	.927		
13	1	9.14	26.80	211870-1	213485-1
		.360	1.055		
17	1,2,& 3	9.14	32.89	207445-1	208652-1
		.360	1.295		
23	1, 3, & 4	11.68	43.89	207446-1	208680-1
		.460	1.728	207446-2	208680-2

Cable Entry Seals

Heat Shrinkable Sealing Boots

Cable entry seals are used with jacketed cable to provide an environmentally sealed wire-to-connector system. They can be used with either plugs or receptacles.

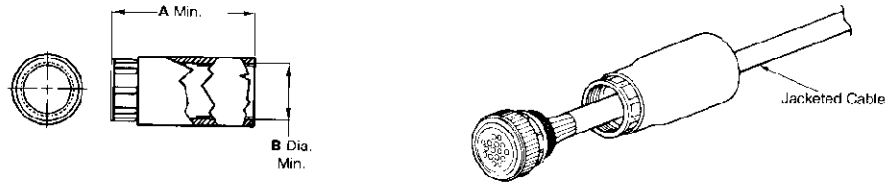

Shell Size	Dimensions		Expanded Wall Thickness	Sealing Range (Dia.)	Max. Recovered Wall Thickness	Part No.
	A	B				
11	63.50	15.88	2.03	6.60 - 15.25	25.91	54010-1
	2.500	.625	.080	.260 - .600	1.20	
13	63.50	19.68	2.03	7.62 - 18.42	25.91	54123-1
	2.500	.775	.080	.300 - .725	1.20	
17	63.50	24.76	2.03	10.16 - 22.22	25.91	54011-1
	2.500	.975	.080	.400 - .875	1.20	
23	76.20	31.75	2.03	13.97 - 31.75	25.91	54012-1
	3.000	1.250	.080	.550 - 1.250	1.20	

Thick Wall Boots

Material:

Internal Sleeve—Nylon

Outer Tubing—Polyolefin

Thin Wall Boots

Material:



Inter Sleeve—Nylon

Outer Tubing—Polyolefin

Expanded Wall Thickness—
0.51 [0.020]

Max. Recovered Wall Thickness—
10.16 [0.400]

Sealing Range—6.35 [0.250] -
12.70 [0.500]

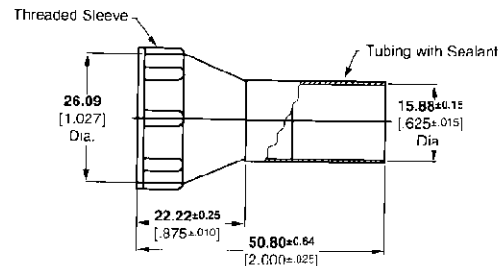

Shell Size 17
Part No. 213933-1