


**Product Details for 207595 -3**

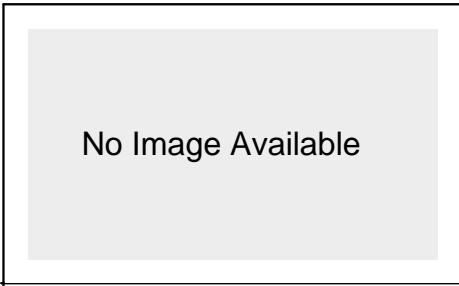

**207595 -3**

[Active](#)

**ARINC 404 Connectors**

[Not ELV or RoHS Compliant](#)

**Product Highlights:**

- ? Sealed
- ? Seal Type = Environmental
- ? Shell Size = 2 Inserts
- ? Shell Configuration = Receptacle
- ? Contact Arrangement (Module A) = 106

[View all Features](#)

**Quick Links**

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

**Documentation & Additional Information**

**Product Drawings:**

- ? [RECEPTACLE CONN. INSTALLATION \(WITH CENTER FEMALE JA...](#)  
(PDF, English)

**Catalog Pages/Data Sheets:**

- ? None Available

**Product Specifications:**

- ? None Available

**Application Specifications:**

- ? None Available

**Instruction Sheets:**

- ? None Available

**CAD Files:**

- ? None Available

**Additional Information:**

- ? [Product Line Information](#)

**Related Products:**

- ? [Tooling](#)

[List all Documents](#)

**Product Features**

(Please use the Product Drawing for all design activity)

**Product Type Features:**

- ? [Sealed](#) = Yes
- ? [Shell Size](#) = 2 Inserts
- ? Shell Finish = Electroless Nickel
- ? Thread Size = 10 -24 Double Lead Thread, Self Locking

**Mechanical Attachment:**

- ? [Keying](#) = 04
- ? Hardware Type = Center Female Jackscrew

**Electrical Characteristics:**

- ? Shell Configuration = Receptacle
- ? Signal Contacts = With
- ? [Shell Mounting Modification](#) = 50
- ? [Custom Order Code](#) = 250

**Termination Related Features:**

- ? Seal Type = Environmental

**Contact Related Features:**

- ? Contact Type (Module A) = Pin
- ? Contact Type (Module B) = Pin

**Configuration Related Features:**

- ? [Contact Arrangement \(Module A\)](#) = 106
- ? [Contact Arrangement \(Module B\)](#) = 106

**Industry Standards:**

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C

**Other:**

- ? Brand = AMP