


2-164306-1 Product Details

Have a Question?

Chat with a Product Information Specialist

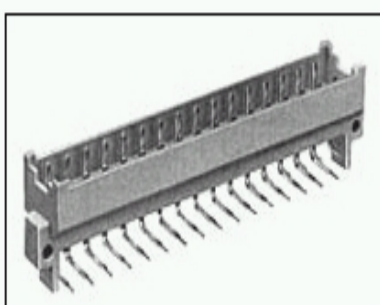

2-164306-1

Eurocard Type F & G

[Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Connector Assembly
- Connector Style = Plug
- Contact Type = Pin
- 32 Positions
- Number of Rows = 3

[View all Features](#)

TE Internal Number: 2-164306-1

[Active](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- [32 positions din 41612 f male 90 degr. solder connector](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Recommended PC Board Hole Pattern](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Connector Type = Connector Assembly
- [Post Type](#) = Solder Post
- [Mount Angle](#) = Right Angle
- [Make First / Break Last](#) = No
- [Interface I](#) = No
- [DIN Level](#) = I
- [Pre-notched to Break Off](#) = No
- [Product Style](#) = Type F
- Color = Gray
- PCB Thickness (Minimum) (mm [in]) = 1.57 [0.062]
- Comment = Solder Posts suitable for PCB holes 0.8 mm or 1.0 mm Dia.

Mechanical Attachment:

- Panel Attachment = Without

Termination Related Features:

- [Termination Post Length \(mm \[in\]\)](#) = 2.79 [0.110]

Body Related Features:

- [Number of Positions](#) = 32
- [Number of Rows](#) = 3
- [Rows Loaded](#) = D, Z

Contact Related Features:

- Contact Type = Pin
- Contact Base Material = Brass

Housing Related Features:

- Connector Style = Plug
- Housing Material = Thermoplastic - GF
- UL Flammability Rating = UL 94V-0

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Converted to comply with RoHS directive

Other:

- Brand = AMP



Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)


Customer Support

- [Email or Chat with Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

Sign up for our eNewsletter

Enter your email address

Follow Us On:



Visit Us On:

