

Wire to Board Connectors CT (Common Termination) Connector System Double Row Arrangement

Mating Figure

Receptacle Connector Captivating Holder (Wire Application Side)

Material : 6/6Nylon

Two insulation displacement receptacles are applied onto this holder to provide a receptacle connector that can mate with a double-row post header.



Applicable connectors are MT connectors or other crimping type connectors. Two of these connectors or a combination of them are applied onto the holder.

*The color of housing is natural. Other colors available include blue, yellow and black.

For details contact our Sales Department.

For receptacle connectors, refer to sections on MT connectors.

**As to receptacle connectors, two pieces each are required per holder.

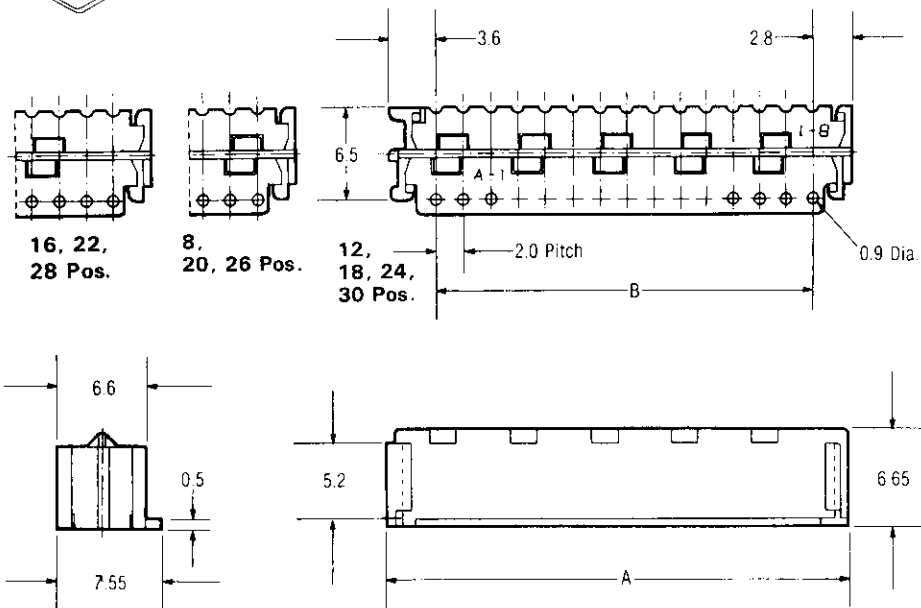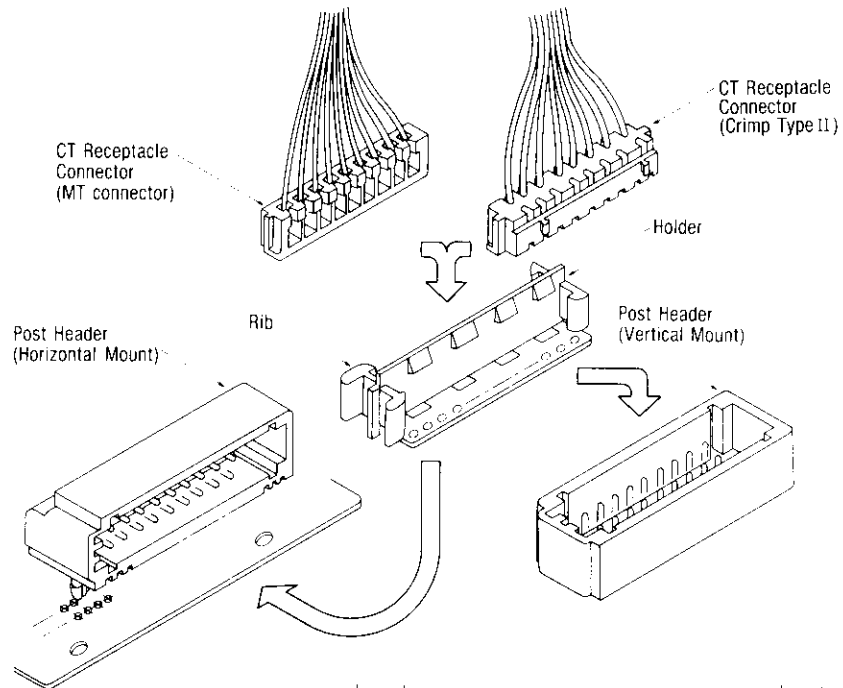

| No. of Pos. | Dimensions | | Part No. of Holder* | Part No. of Applicable Connector* |
|-------------|------------|------|---------------------|-----------------------------------|
| | A | B | | MT Connector** |
| 8*** | 12.3 | 6.0 | 175133-8 | 173977-4 |
| 12*** | 16.3 | 10.0 | 1-175133-2 | 173977-6 |
| 16 | 20.3 | 14.0 | 1-175133-6 | 173977-8 |
| 18 | 22.3 | 16.0 | 1-175133-8 | 173977-9 |
| 20 | 24.3 | 18.0 | 2-175133-0 | 1-173977-0 |
| 22 | 26.3 | 20.0 | 2-175133-2 | 1-173977-1 |
| 24 | 28.3 | 22.0 | 2-175133-4 | 1-173977-2 |
| 26 | 30.3 | 24.0 | 2-175133-6 | 1-173977-3 |
| 28 | 32.3 | 26.0 | 2-175133-8 | 1-173977-4 |
| 30 | 34.3 | 28.0 | 3-175133-0 | 1-173977-5 |

*** 8 pos. & 12pos. are for drawer.