

AMPMODU MOD II Pin Housings & Contacts

- Single and double row
- Built-in polarisation and latching
- Gold or tin plated crimp snap-in contacts

Specification:


Housing - Black thermoplastic
UL 94V-1

Contacts - Phosphor bronze


Current Rating - 3A

Mating Connectors:

MOD II Receptacle Housings - Page 23

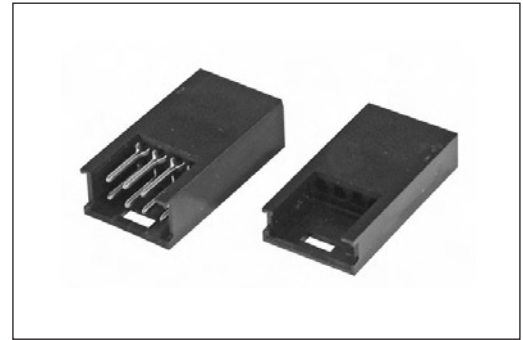


Single Row

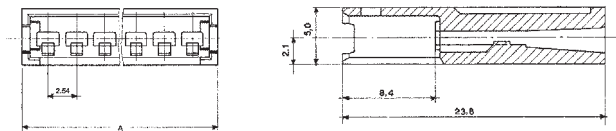

No. of Positions	Dimension A	Part Number
2	7.4	280628
4	12.5	280629
6	17.5	280630
8	22.6	280631
10	27.7	280633
15	40.4	280635

Double Row

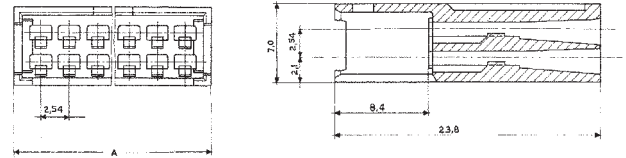

No. of Positions	Dimension A	Part Number
2x4	12.5	280637
2x8	22.6	280638
2x12	32.8	280640

Crimp Snap-In Contacts

Wire Size Range mm ²	AWG	Insulation Diameter mm	Packaging	Part Number	
				0.4µm Gold	Tin
0.32 - 0.13	22 - 26	0.90 - 1.55	Tape and Reel	86557-6	1-86557-9
			Loose Piece	86561-6	1-86561-0

*Find application tooling
see page 157*

www.tooling.tycoelectronics.com/europe