


Product Details for 131 -0139 -0002

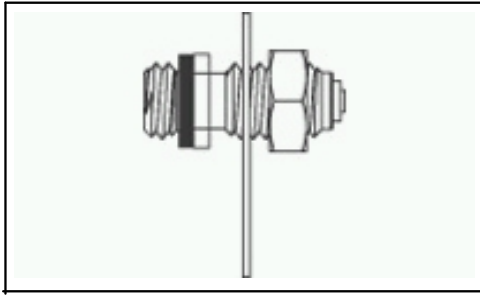

131 -0139 -0002

Tyco Part Number: 3 -1532005 -
6

[Active](#)

SMB RF Connectors

[RoHS Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? Connector
- ? Jack
- ? Miniature
- ? Terminate To Coaxial Cable
- ? Coupler Style = Threaded

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [None Available](#)

Catalog Pages/Data Sheets:

- ? [None Available](#)

Product Specifications:

- ? [None Available](#)

Application Specifications:

- ? [None Available](#)

Instruction Sheets:

- ? [None Available](#)

CAD Files:

- ? [None Available](#)

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Connector
- ? [Gender](#) = Jack
- ? Connector Series = Miniature
- ? [Body Style](#) = Straight
- ? [Grade](#) = Commercial
- ? Safety Wire Holes = Without
- ? Thread Size = 4.83 [.190] -32 UNF -2A
- ? Panel Thickness (mm [in]) = 3.81 [0.150]
- ? Body Material = Brass
- ? Dielectric Material = TEFLON
- ? Comment = No Mounting Flat

Mechanical Attachment:

- ? [Panel Attachment](#) = With
- ? [Panel Attachment Style](#) = Front Mount
- ? Panel Attachment Method = Jam Nut

Electrical Characteristics:

- ? [Connector Impedance \(?\)](#) = 50
- ? Environmental Seal = Without
- ? Solderless = No

Termination Related Features:

- ? [Coaxial Cable Termination Type](#) = Solder

Body Related Features:

- ? Coupler Style = Threaded
- ? [Pin Protection](#) = Without
- ? Solder Lug = With
- ? [Body Plating](#) = Gold per MIL -G-45204, Type II, Grade C, Class 1
- ? Terminal Style = Solder Pot

Contact Related Features:

- ? [Center Contact Plating](#) = Gold per MIL -G-45204, Type II, Grade C, Class 1
- ? Contacts = With

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin -in -Paste capable to 245°C, Pin in -Paste capable to 260°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? [Terminate To](#) = Coaxial Cable

Other:

- ? Brand = Microdot