


4-6450330-9 Product Details

Share | Print | Email

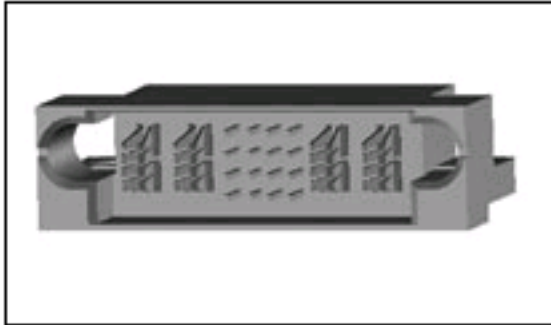

4-6450330-9

TE Internal Number: 4-6450330-9

Active

View 3D PDF

MULTI-BEAM XL and MULTI-BEAM XLE Connectors

Always EU RoHS/ELV Compliant ([Statement of Compliance](#))

Product Highlights:

- Product Series = XL
- Board-to-Board
- Header
- Connector Style = Plug
- Contact Type = Pin

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | Request Sample | Find Similar Products | Buy Product

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- [2_PIECE_POWER_CONNECTORS_qrq_4-1773458-1](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version L3)
- [3D Model](#) (IGES, Version L3)
- [3D Model](#) (STEP, Version L3)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Series = XL
- Connector Type = Header
- [Mount Angle](#) = Right Angle
- [Termination Style](#) = Solder
- [Mating Type](#) = Blindmate
- [PCB Mount Retention](#) = Without
- Guides = With

Electrical Characteristics:

- Mating Functionality = Mate Last-Break First
- Voltage Rating (Signal) (VAC) = 60
- Voltage Rating (Power) (VAC) = 300
- Voltage Rating (Power) (VDC) = 200

Termination Features:

- Termination Post Length (mm [in]) = 3.43 [0.135]

Body Features:

- [Sequencing](#) = Yes
- Connector Configuration Orientation = Left-to-Right
- Centerline, DC Module (mm [in]) = 6.35 [0.250]
- Centerline, Matrix (mm [in]) = 2.54 x 2.54 [.100 x .100]

Contact Features:

- Contact Type = Pin
- Contact Material (Power) = High Conductivity Copper
- Contact Material (Signal) = Copper Alloy
- Contact Plating, Mating Area, Material = Gold (30)

Housing Features:

- Connector Style = Plug
- Housing Material = High Temperature Thermoplastic

Configuration Features:

- [Total Number of DC Power](#) = 4
- [Total Number of AC Power](#) = 0
- Total Number of Coax = 0
- [Total Number of Signal](#) = 16
- Connector Contact Configuration (No. of Pos./Type) = 2/DC Power, 16/Signal, 2/DC Power

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Operation/Application:

- Application Use = Board-to-Board

Other:

- Brand = AMP
- Comment = For additional configurations available, contact Tyco Electronics.

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

Enter your email address

