

Distributed by:


**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 950735

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
CE	16				E	REV PER 0A00-0406-95	11-1-95	DDE

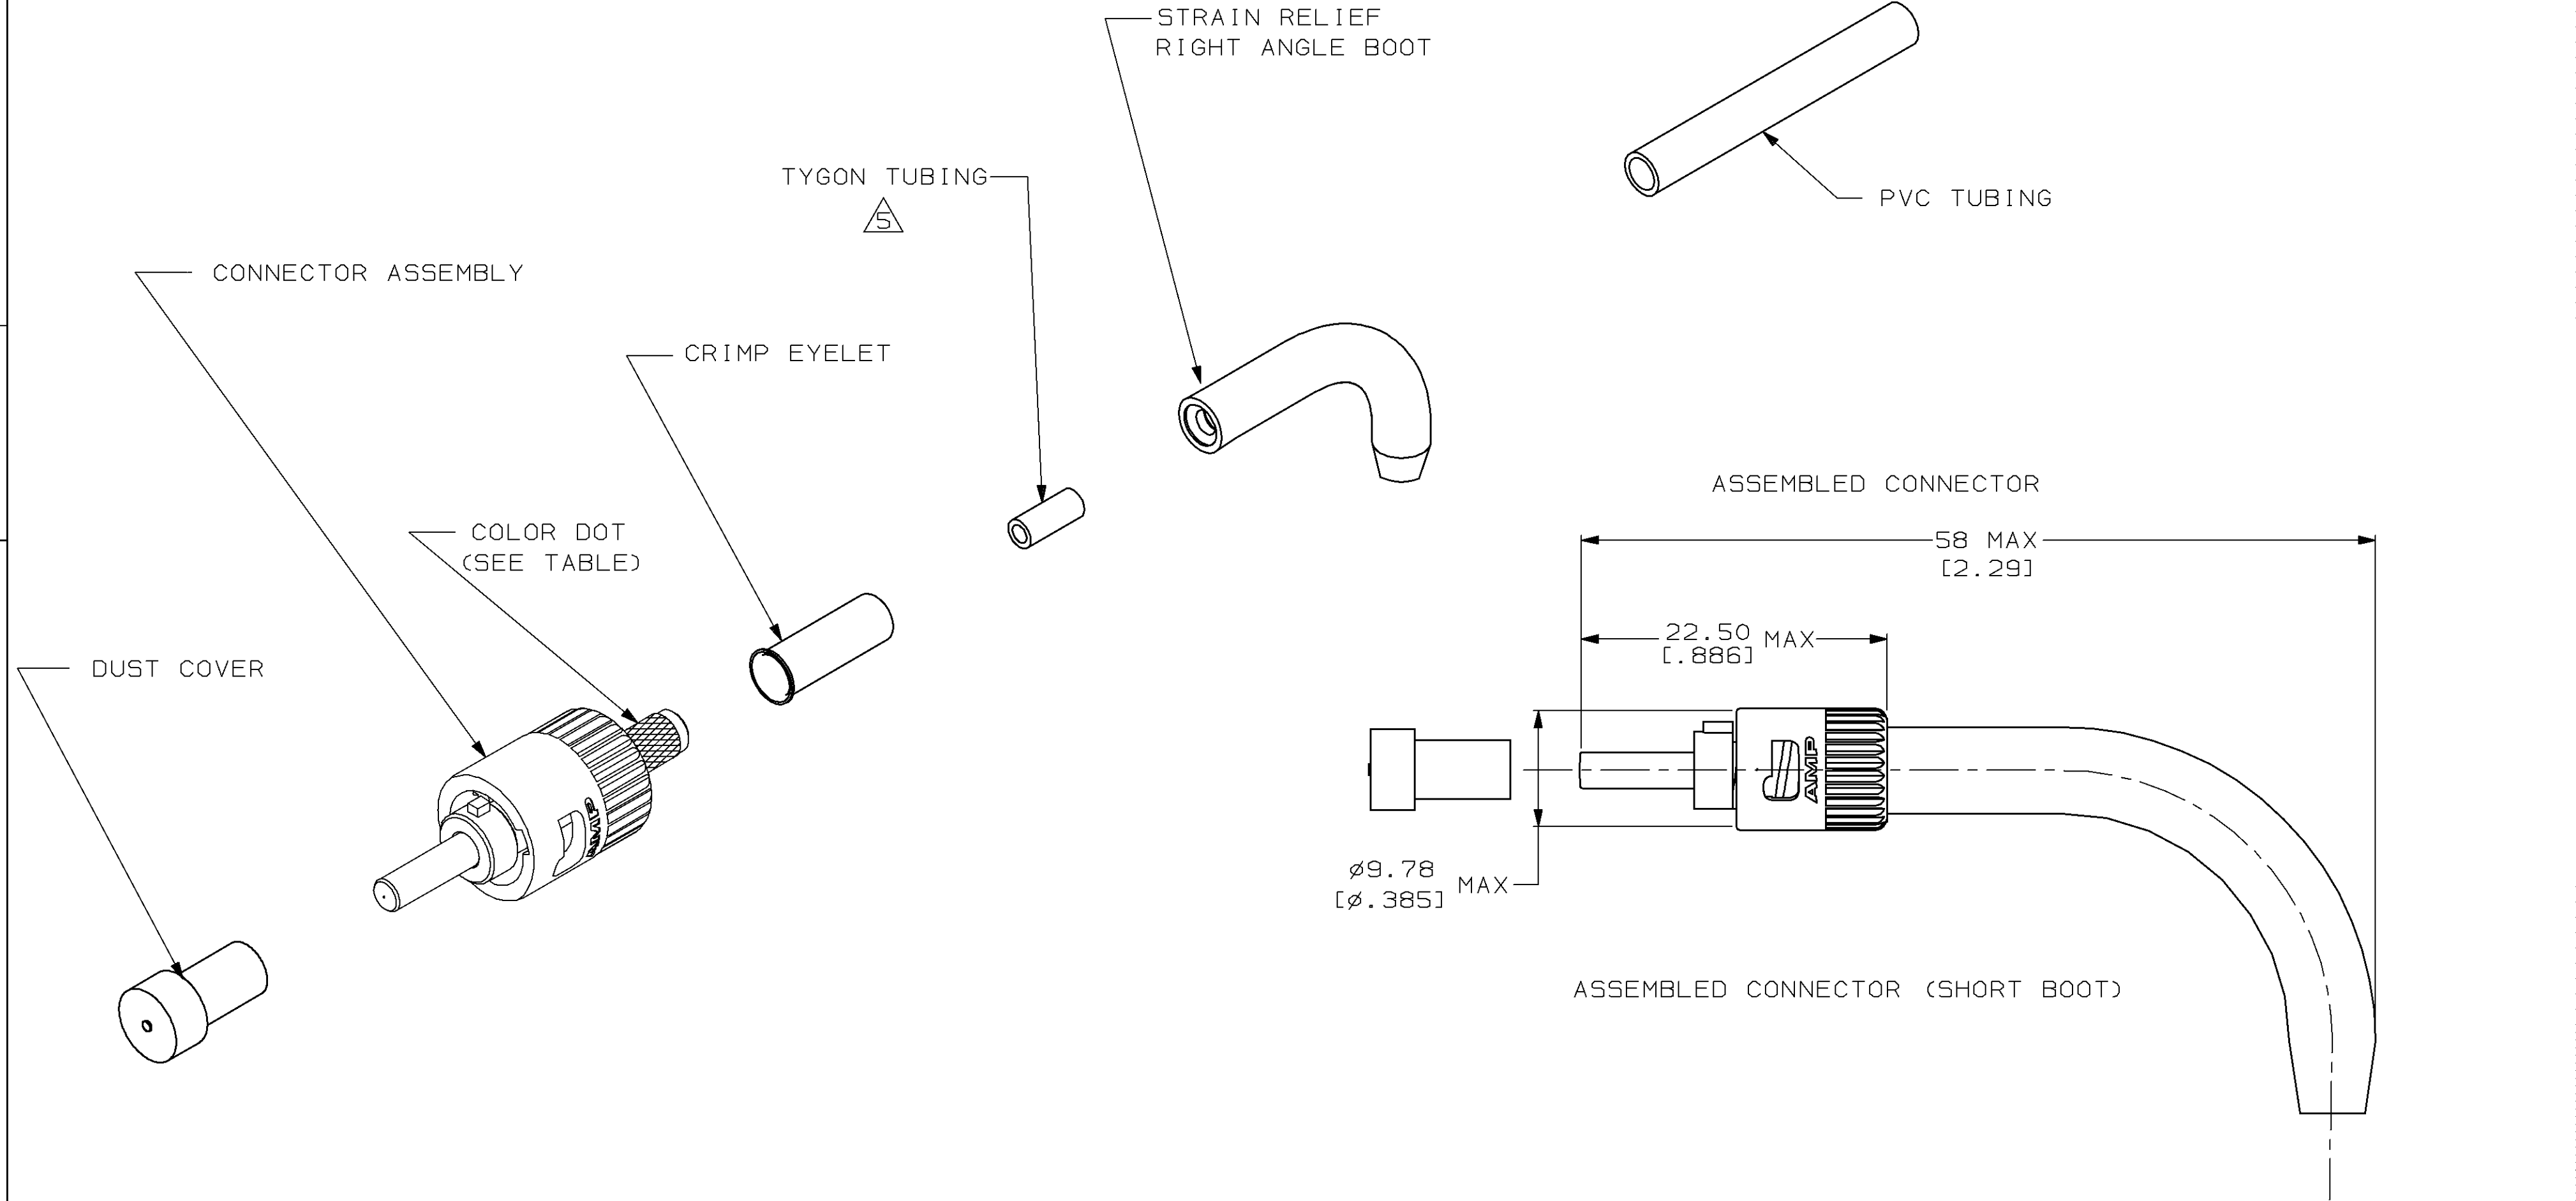

- DIMENSIONS IN [ ] ARE IN INCHES.
  - INSTRUCTION SHEET 6935.
- ③ BODY: BRASS  
 CAPILLARY: CERAMIC  
 COUPLING NUT: ZINC  
 STRAIN RELIEF: TPE
  - ④ BODY: ELECTROLESS NICKEL  
 COUPLING NUT: ELECTROLESS NICKEL
  - ⑤ USE WITH 900µm BUFFERED FIBER ONLY.

METRIC

	OBSELETE	BLACK	GREEN	140±3 µm	502674-2
		BLACK		125±2 µm	502674-1
		STRAIN RELIEF COLORS	COLOR DOT	FIBER SIZE	PART NO
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm TOLERANCES ON :	DR 2-1-91 R.HILEMAN	AMP INCORPORATED Harrisburg, Pa. 17105			
2 PLC DEC ±	CHK 2-1-91 B.BRIGGS				
3 PLC DEC ±	APPD 2-7-91 F.ANTONICELLI				
ANGLES ±	APPD 2-7-91 D.COLLINS				
MATERIAL	PRODUCT SPEC 108-45113	NAME CONNECTOR KIT, RIGHT ANGLE, 2.5mm BAYONET, OPTIMATE®			
FINISH	APPLICATION SPEC	SIZE C	FSCM NO 00779	DRAWING NO 502674	
	WEIGHT	SCALE 2:1	SHEET 1 OF 1		