


5174253 -2 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

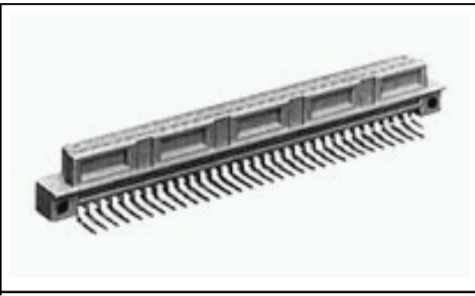

5174253 -2

[Active](#)

Eurocard Type Q

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? Mating Type = Receptacle
- ? Number of Positions = 64
- ? Size = Standard
- ? PCB Mount Angle = Right Angle
- ? Post Type = Solder Post

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [View Mating Products \(6\)](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [DR DIN CONN. FEMALE ASSY \(WITH GROUND\)](#) (PDF, Japanese)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files: ([CAD Format & Compression Information](#))

- ? [2D Drawing](#) (DXF, Version 0)
- ? [3D Model](#) (IGES, Version 0)
- ? [3D Model](#) (STEP, Version 0)

[List all Documents](#)

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)
- ? [Mating Products \(6\)](#)

Product Features

(Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Mating Type](#) = Receptacle
- ? [Number of Positions](#) = 64
- ? [Size](#) = Standard
- ? [PCB Mount Angle](#) = Right Angle
- ? [Post Type](#) = Solder Post
- ? [Make First / Break Last](#) = Yes
- ? [DIN Level](#) = III
- ? [PCB Retention Feature](#) = No
- ? Color = Gray

Body Related Features:

- ? Make First/Break Last Contacts Loaded = B1, B32
- ? Rows Loaded = A, B

Contact Related Features:

- ? Contact Material = Phosphor Bronze

Housing Related Features:

- ? Housing Material = Polyester
- ? Housing Flammability Rating = UL 94V -0

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- ? Brand = AMP